


INTRODUCING THREAD™

Linear LED lighting system.
Simple. Functional. Consistent. Reliable.



ADD DRAMATIC LED
LIGHTING TO ANY SPACE,
SIMPLY.

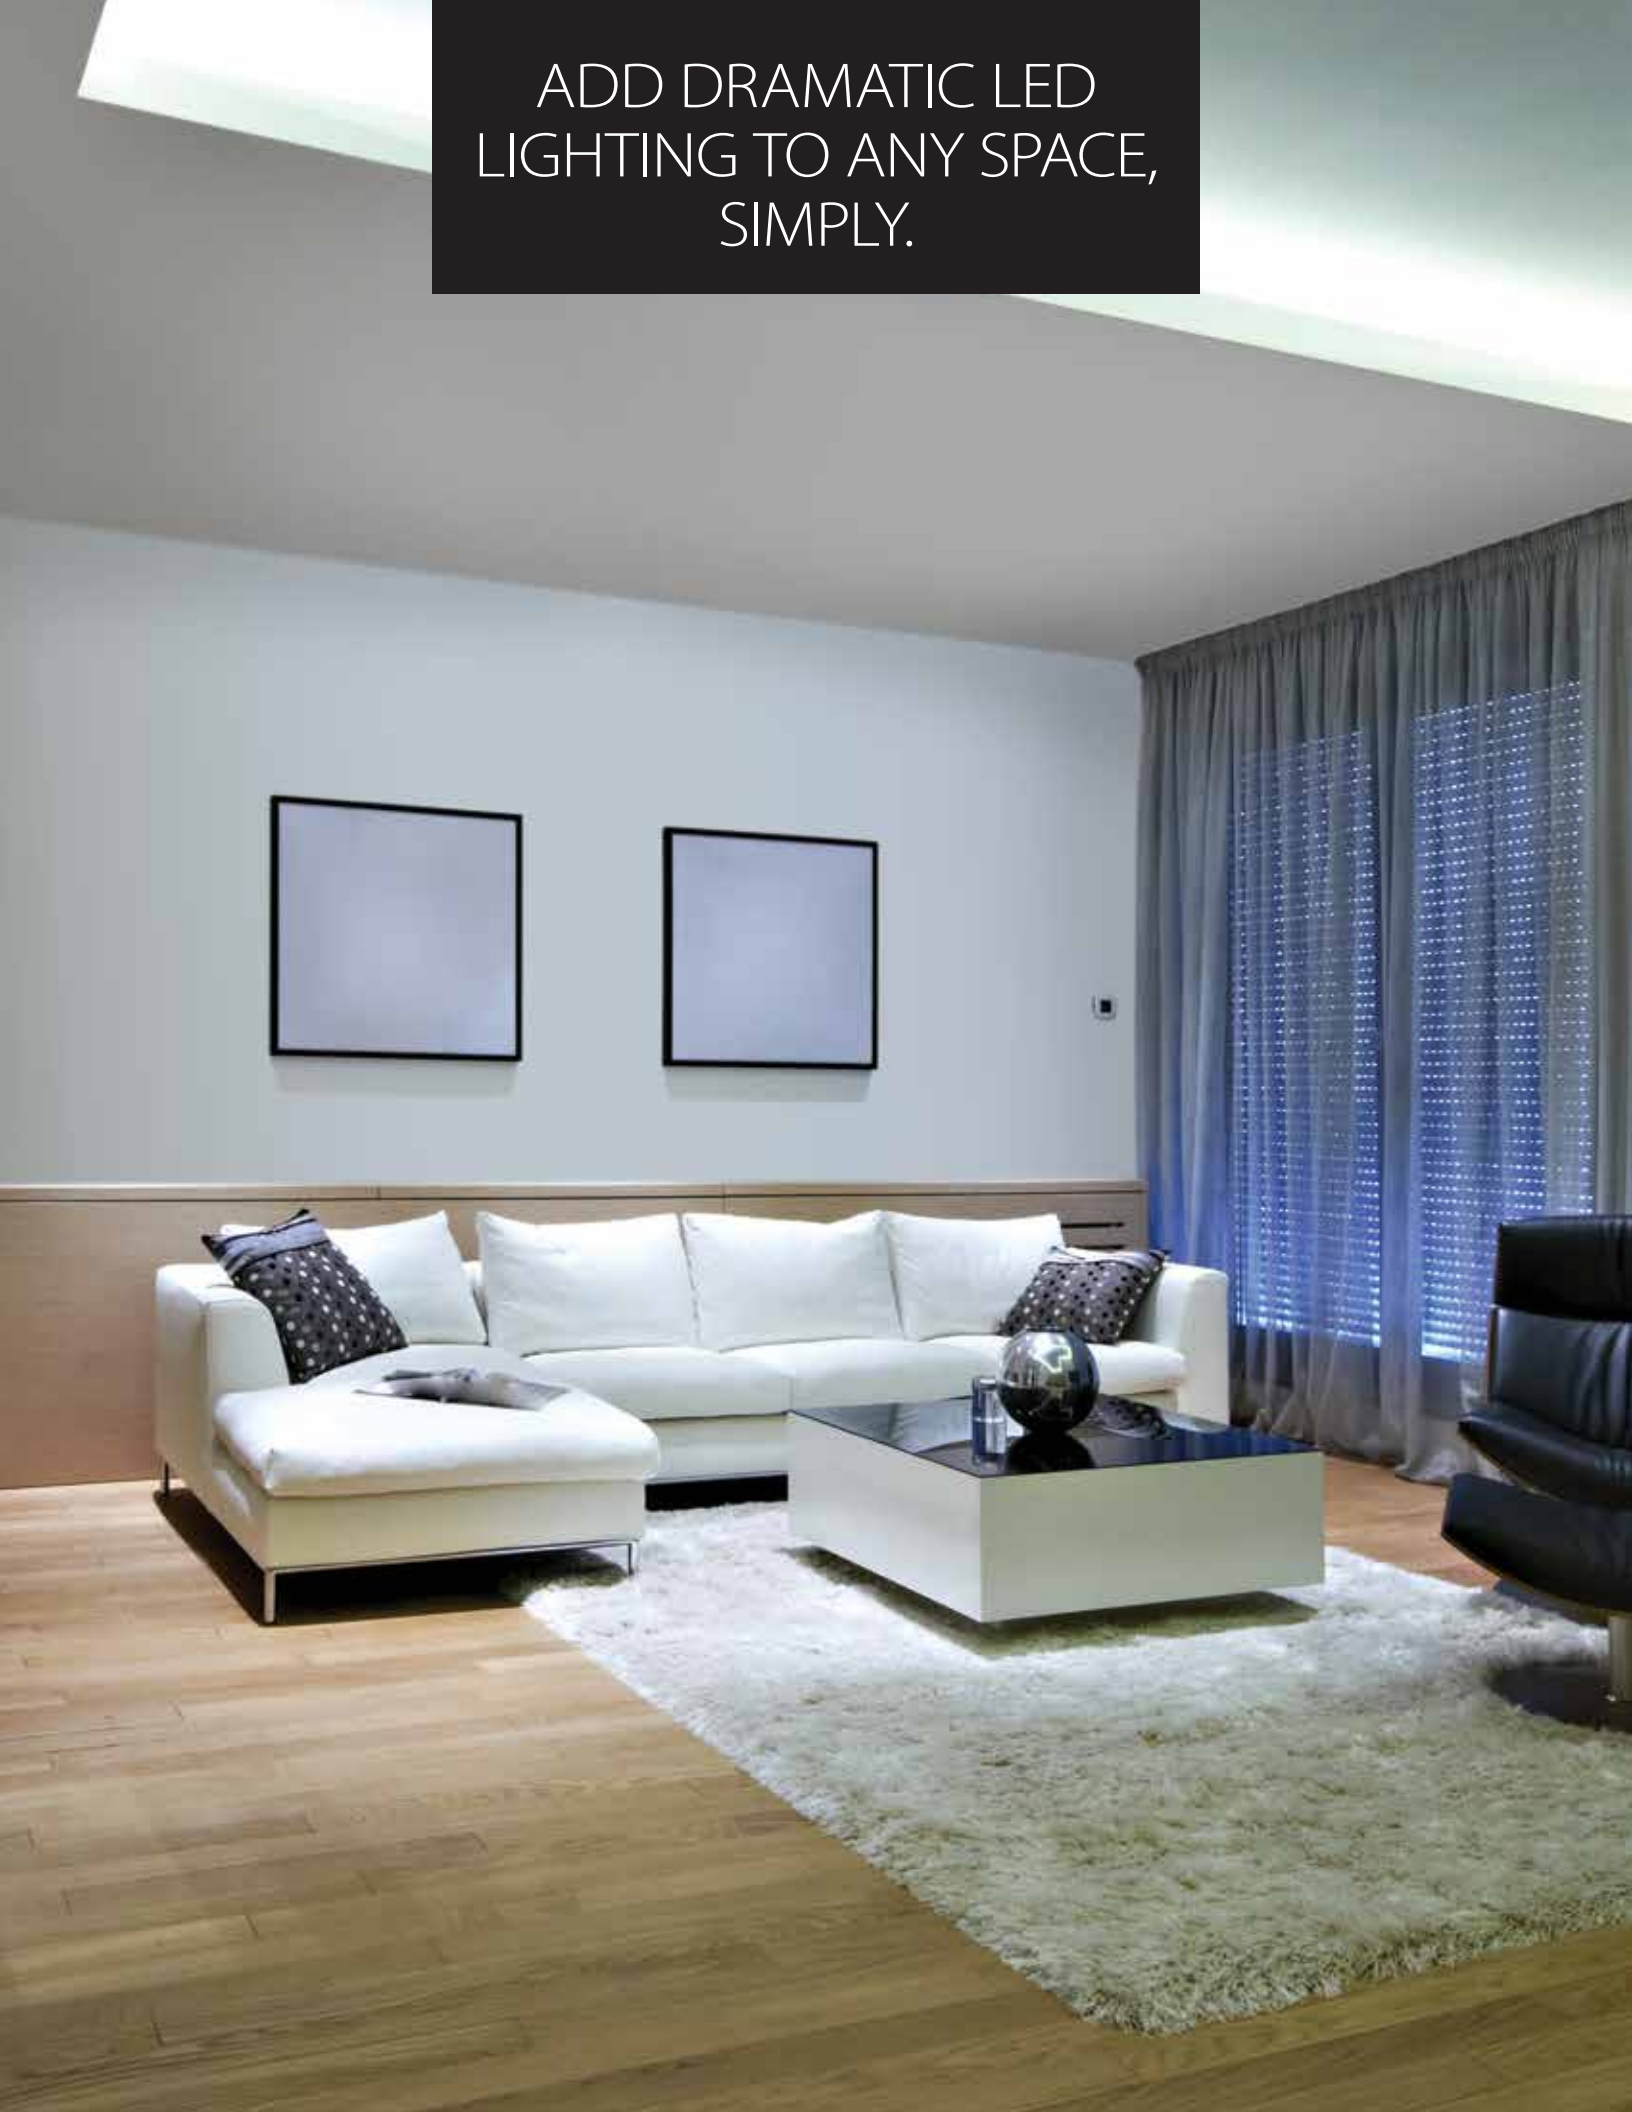



Thread™ fixtures are designed not to attract attention – except for the dramatic lighting effects they help you achieve. This easy to install system includes a variety of convenient lengths and connection options that allow you to link uninterrupted runs to almost any length you need.

Quality you can see

Thread linear LEDs are self-driven making them sleek and easy to install – no external drivers are required. They provide continuous, efficient LED light with consistent color temperature of either 2700K or 3500K from fixture to fixture thanks to precise binning of each LED package. Thread fixtures are available from 2.8 to 13 Watts, and in 6", 10", 21" and 30" lengths and can be easily connected to achieve a maximum of 65' runs off one power feed. The combination of convenient lengths, wattages, color temperatures and connection options make Thread the most versatile system available.

No more dreary spaces

Thread can add drama to unnoticed details and serve as useful task lighting at the same time. Open soffits, countertops, toe-kicks, coves and architectural ceiling details in homes, and retail or commercial spaces, become design opportunities using dramatic, yet functional lighting.



THREAD™ LINEAR LED SYSTEM



Cove and
under-cabinet

THREAD LINEAR LED SYSTEM TECHNICAL OVERVIEW

In the home

Thread can illuminate kitchen countertops and vanities, add reflected light from open soffits and accent the base cabinets all while out of view. Illuminate pantry shelves, walk-in closets, laundry rooms, even workshops and craft counters—anywhere additional lighting could add value and make daily living easier and more attractive.



Hospitality suddenly gets more inviting

Long, uninterrupted runs of efficient LED light can make even the most uninteresting spaces impressive. Architectural details in lobby ceilings and walls, seating areas and guest rooms can be easily accentuated to create added dimension and interest.

Restaurants and lounges come alive

Add drama to bars and dining areas in the most creative ways with this versatile LED lighting system. Showcase top-shelf products in bars, private dining alcoves, even floral displays.

Thread internals

- Advanced on-board IC direct drive technology
- No external driver required
- No capacitor = greater reliability and longer life
- Reduced size

LED Packages



Patented IC Direct Drive Circuitry



Linear lighting continuity

- Custom PCB (printed circuit board) layout and fixture body design maintain LED package spacing as LED fixtures are joined together.

Consistent 0.5" LED Package Spacing



Removable diffuser lens (included)

- Softens visual glare
- Reduced reflectivity of LEDs from polished surfaces
- With lens removed lumen output increases by approximately 15%






Advanced color management

It's what makes Thread different.

- The ANSI range of 2700K is divided into 12 ranks.
- Our LED Packages only use 9 of the 12 ranks within the ANSI standard.
- Without the MRM procedure, the CCT may be spread over the range inside the blue diamond.
- After MRM, the range of CCT will shrink to within the green diamond.
- The Thread system, uses only 6 ranks and blends those ranks, so that the actual CCT range is much smaller and is similar to a 5-step MacAdam ellipse. Ranking falls within the black dashed diamond.

MRM (Multi- Rank Mix) Diagram

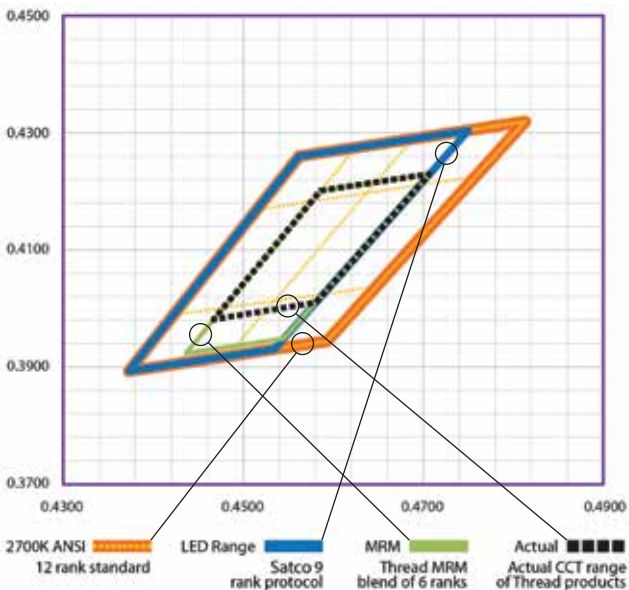

Connections are quick and easy



Keyed connectors

- Assures proper current flow
- Makes connections simple



Junction box

- Available with and without on/off side mounted rocker switch
- Supplied with 3/8" Romex connectors and rubber hole plugs
- Approved for branch circuit wiring
- Accepts 14/3 wire
- 3/8" Knockouts on back of box
- Female power connector located on side of box

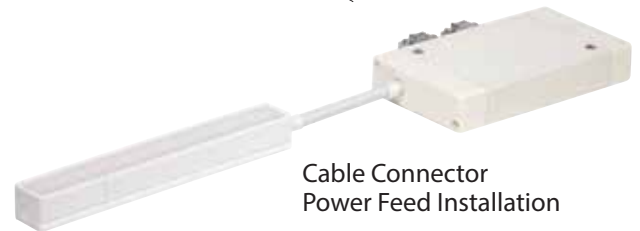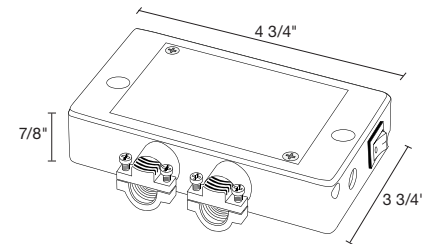

ACCESSORIES




Each Thread linear LED system comes with:



Power accessories (optional)



Connection accessories (optional)

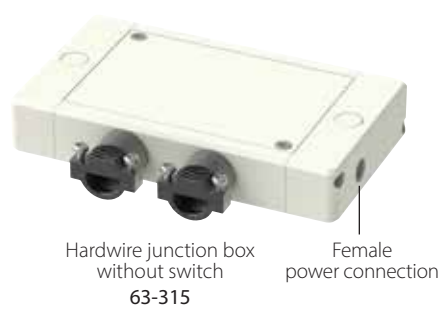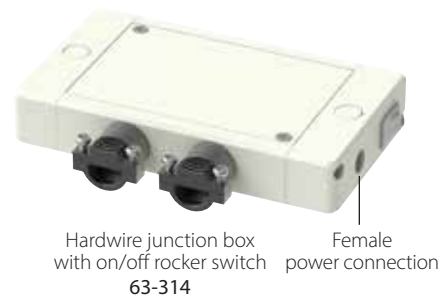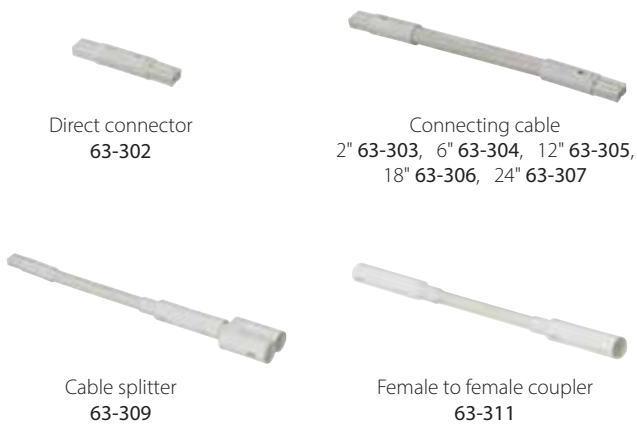

KEY FEATURES

- Available in 6", 10", 21" and 30"
- On board IC driver—no external driver required
- 2700K or 3500K
- 312 Lumens per foot at 2700K
- 330 Lumens per foot at 3500K
- CRI 80+
- Diffuser lens for even light – eliminates hot spots and glare – included
- Flat mounting clips, 45° mounting clips, removable diffusing lens and closed end cap included with each unit
- Very low heat, no UV or IR radiation
- Direct-wire or portable installations – various connection accessories available
- Up to 65' continuous runs off one power feed
- Exact spacing of LEDs, including fixture to fixture for consistent, even lighting
- 50,000 hours rated life
- ENERGY STAR certified for under-cabinet and cove applications
- 5 year warranty*
- Construction: Extruded polycarbonate body and diffuser lens
- Power: 120V AC
- Light source: LED 2700K and 3500K
- Finish: White
- Dimming to less than 5% with electronic low voltage (ELV) dimmers
- Damp location listed

Specifications

Item #	Size Type	Color Temperature	Watts	Voltage	Luminous Flux	Luminous Efficacy	Color Index	Beam Angle	Life Hours	Dimensions
63-101	6"	2700K	1.8W	120V	166	86	80†	110°	50,000	6" L x .826" W x .708" H
63-201	6"	3500K	1.8W	120V	180	100	80†	110°	50,000	6" L x .826" W x .708" H
63-102	10"	2700K	3W	120V	268	89	80†	110°	50,000	10" L x .826" W x .708" H
63-202	10"	3500K	3W	120V	278	92	80†	110°	50,000	10" L x .826" W x .708" H
63-103	21"	2700K	7W	120V	593	84	80†	110°	50,000	21" L x .826" W x .708" H
63-203	21"	3500K	7W	120V	607	86	80†	110°	50,000	21" L x .826" W x .708" H
63-104	30"	2700K	10W	120V	804	80	80†	110°	50,000	30" L x .826" W x .708" H
63-204	30"	3500K	10W	120V	833	83	80†	110°	50,000	30" L x .826" W x .708" H



Damp Location

ENERGY STAR, ETL and FCC certification



***Warranty** The Thread LED Under-Cabinet and Cove Linear LED System is warranted by Satco Products, Inc. when delivered in new condition and in its original package against defects in material and workmanship for a period of 5 years from the original date of purchase. All warranty claims should be returned to Satco. Contact Satco to obtain return authorization. Once returned, and product is proven to have manufacturing defect upon inspection by Satco, product will be repaired or exchanged as determined by Satco.



www.nuvolighting.com
NU1185 11/17



National Toll-Free: **1.800.43.SATCO** (1.800.437.2826) www.satco.com

Corporate Offices & Distribution Center: **NEW YORK** 110 Heartland Blvd., Brentwood, NY 11717 800.437.2826 631.243.2022 Fax 631.243.2027

Distribution Centers: **FLORIDA** 900 N.W. 159th Drive, Miami, FL 33169 800.437.2826 305.624.2044 FAX 305.623.0286
CALIFORNIA 31288 San Benito St. Hayward, CA 94544 800.437.2826 510.487.4822 FAX 510.487.8955
WASHINGTON 4710 116th St. S.W., Mukilteo, WA 98275 800.437.2826 425.789.3300 FAX 425.789.3310
TEXAS 2000 Valwood Parkway, Farmers Branch, TX 75234 800.437.2826 972.247.2437 FAX 972.247.5408
PUERTO RICO Campeche St. 23, Julio N. Matos Industrial Park, Carolina, PR 00984 787.757.3510 FAX 787.757.3540



Like us!



Follow us!

© Copyright 2017, SATCO Products, Inc