

# FRAMEWRX EXTERIOR LIGHTING





# FRAME WRX EXTERIOR LIGHTING





# PATH LIGHTS • BOLLARDS • SCONCES

Transform and define your outdoor space with FrameWRX exterior lighting. Highlight architectural features or illuminate landscaped areas no matter the size or scale of installation. Create a cohesive style and statement by integrating layered lighting with the use of path lights, bollards, and wall sconces to expand your outdoor lighting environment and create illuminated areas from dusk to dawn contributing to a sense of safety and security.









# BURG SERIES


The Burg series exemplifies simple elegance with minimalist design. Featuring clean lines and a touch of flair, the Burg series effortlessly disappears into its setting or can be positioned to make a bold statement perfect for larger outdoor areas where ample illumination is desired.

## SPECIFICATIONS

LUMENS	Bollard: 720Lm   Path: 720Lm   Sconce: 720Lm
VOLTAGE	Bollard: 120-277V AC   Path: 12V AC   Sconce: 120-277V AC
WATTAGE	Bollard: 10W   Path: 10W   Sconce: 10W
COLOR TEMP	3000K
CRI	90+
FINISH	Graphite
MOUNTING	Bollard: Surface   Path: Surface / Soil   Sconce: Wall Mount
CONSTRUCTION	Aluminum Housing / Polycarbonate Lens
RATING	cETLus Listed (Wet Location - IP65)
RATED LIFE	30,000 Hours
WARRANTY	3 Years

## ORDERING INFORMATION

SCO-BURG-GT	Burg Sconce (120-277V AC)
BOL-BURG-GT	Burg Bollard (120-277V AC)
PATH-BURG-GT	Burg Path Light (12V AC)
PATH-SMS	Soil Mount Stake (Path Light)

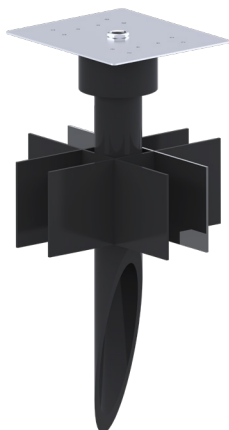

Path Light  
Soil Mount Stake









# STAGE SERIES

Exhibiting a modern simplistic design approach, the Stage series bollard, path light, and wall sconce blend seamlessly into contemporary architecture and landscapes. Featuring symmetric down lighting that provides abundant outdoor illumination with clean angular aesthetic that maintains an understated elegance.




## SPECIFICATIONS

LUMENS	Bollard: 450Lm   Path: 450Lm   Sconce: 240Lm
VOLTAGE	Bollard: 120-277V AC   Path: 12V AC   Sconce: 120-277V AC
WATTAGE	Bollard: 10W   Path: 10W   Sconce: 7.5W
COLOR TEMP	3000K
CRI	90+
FINISH	Graphite
MOUNTING	Bollard: Surface   Path: Surface / Soil   Sconce: Wall Mount
CONSTRUCTION	Aluminum Housing / Polycarbonate Lens
RATING	cETLus Listed (Wet Location - IP65)
RATED LIFE	30,000 Hours
WARRANTY	3 Years

## ORDERING INFORMATION

SCO-STAGE-GT	Stage Sconce (120-277V AC)
BOL-STAGE-GT	Stage Bollard (120-277V AC)
PATH-STAGE-GT	Stage Path Light (12V AC)
PATH-SMS	Soil Mount Stake (Path Light)

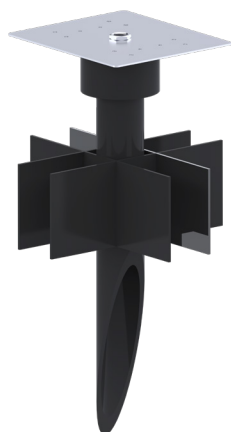

Path Light  
Soil Mount Stake









# BLOOM SERIES


A gracefully curved light source, the Bloom series features a clean cylindrical silhouette that plays on traditional design with a more modern touch. Beautifully highlight areas with even light distribution in part to 360° illumination design making the bloom series perfect for a multitude of outdoor applications.

## SPECIFICATIONS

LUMENS	Bollard: 720Lm   Path: 720Lm   Sconce: 720Lm
VOLTAGE	Bollard: 120-277V AC   Path: 12V AC   Sconce: 120-277V AC
WATTAGE	Bollard: 10W   Path: 10W   Sconce: 10W
COLOR TEMP	3000K
CRI	90+
FINISH	Graphite
MOUNTING	Bollard: Surface   Path: Surface / Soil   Sconce: Wall Mount
CONSTRUCTION	Aluminum Housing / Polycarbonate Lens
RATING	cETLus Listed (Wet Location - IP65)
RATED LIFE	30,000 Hours
WARRANTY	3 Years

## ORDERING INFORMATION

SCO-BLOOM-GT	Bloom Sconce (120-277V AC)
BOL-BLOOM-GT	Bloom Bollard (120-277V AC)
PATH-BLOOM-GT	Bloom Path Light (12V AC)
PATH-SMS	Soil Mount Stake (Path Light)

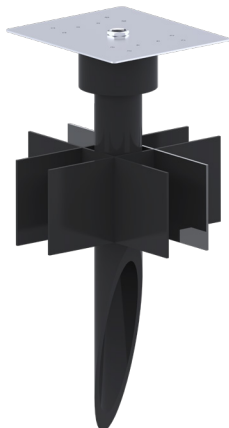

Path Light  
Soil Mount Stake







# CENTRIK

Beautiful for its simplicity, the Centrik flush mount light fixture features a sleek, modern design with installation versatility. Delivering optimum light output of 1000 lumens per fixture, the Centrik is ideal for use as a ceiling flush mount or as a wall sconce.


## ORDERING INFORMATION

**SCO-CENTRIK-RD-GT** Centrik Round Flush Mount  
**SCO-CENTRIK-SQ-GT** Centrik Square Flush Mount

## SPECIFICATIONS

LUMENS	1000Lm
VOLTAGE	120-277V AC
WATTAGE	20W
COLOR TEMP	3000K
CRI	90+
FINISH	Graphite
CONSTRUCTION	Aluminum Housing / Polycarbonate Lens
RATING	cETLus Listed (Wet Location - IP65)
RATED LIFE	30,000 Hours
WARRANTY	3 Years



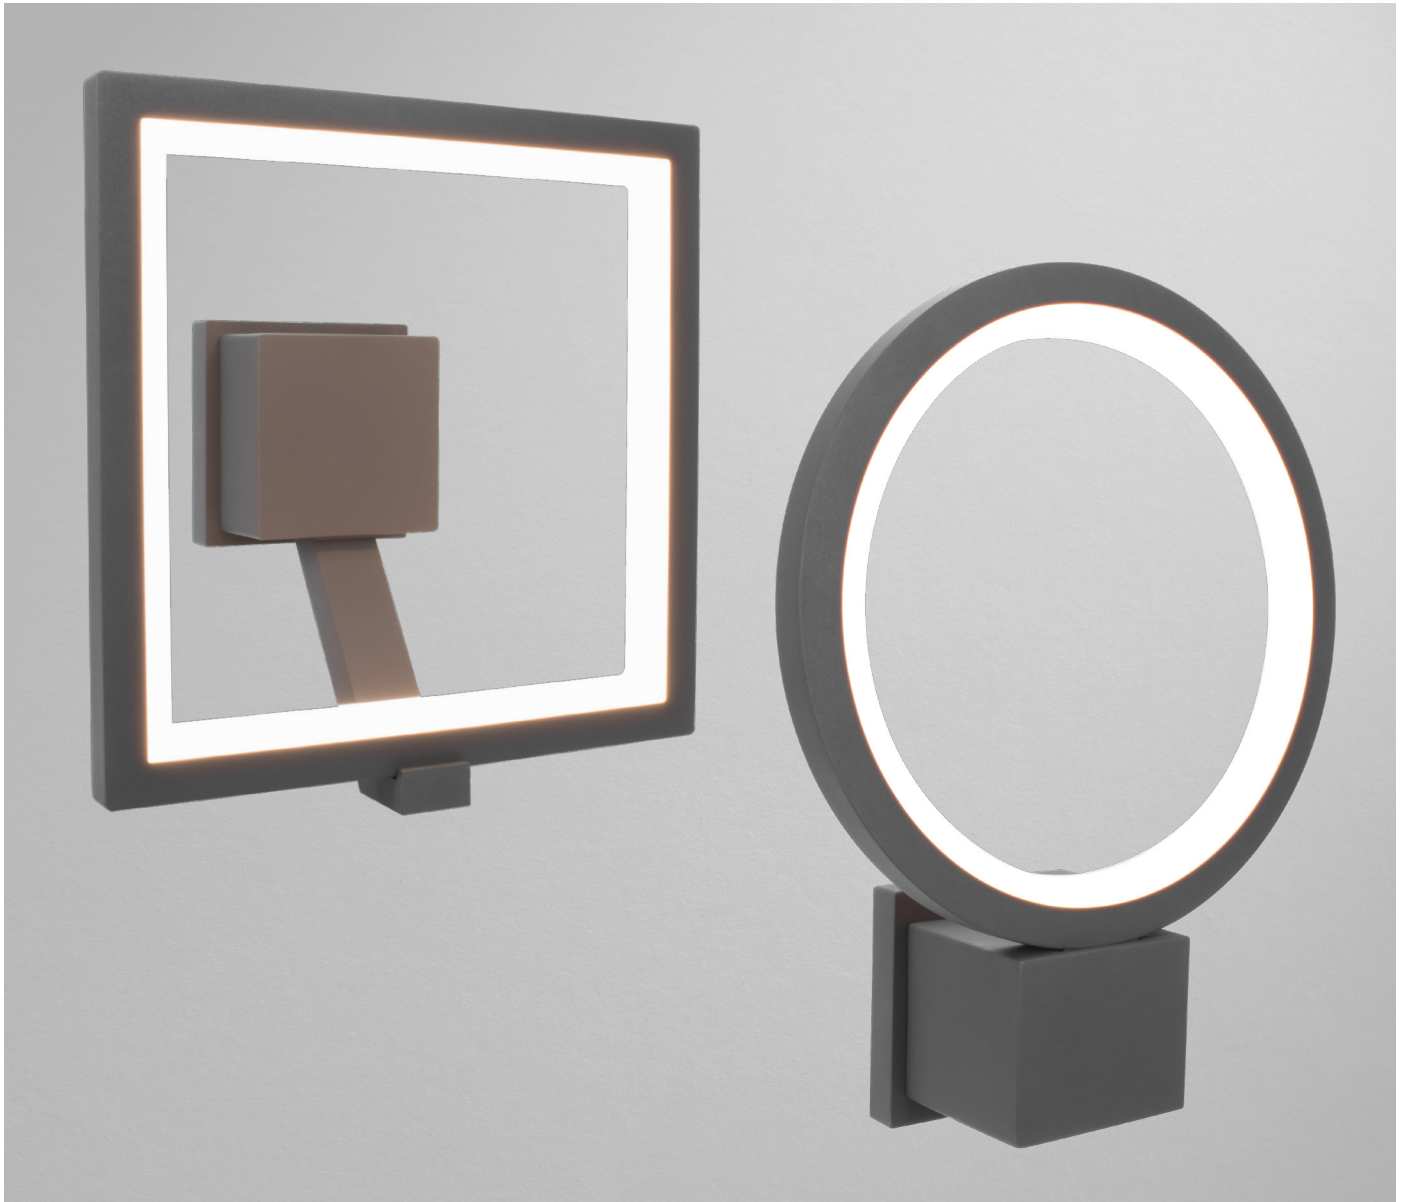

# EXO

Available in unique round or square profiles, the Exo series is dynamically designed to create abundant outdoor architectural lighting while accenting a more modern aesthetic that delivers up to 750 lumens.

## ORDERING INFORMATION

SCO-EXO-RD-GT Exo Round Sconce  
SCO-EXO-SQ-GT Exo Square Sconce

## SPECIFICATIONS

LUMENS	750Lm
VOLTAGE	120-277V AC
WATTAGE	15W
COLOR TEMP	3000K
CRI	90+
FINISH	Graphite
CONSTRUCTION	Aluminum Housing / Polycarbonate Lens
RATING	cETLus Listed (Wet Location - IP65)
RATED LIFE	30,000 Hours
WARRANTY	3 Years





# FORUM

A classic silhouette of a familiar icon with a more modern design, the Forum wall sconce features an indirect lighting source that sure to grab attention and effectively illuminate entryways or larger corridors.

## ORDERING INFORMATION

SCO-FORUM-GT Forum Wall Sconce

## SPECIFICATIONS

LUMENS	850Lm
VOLTAGE	120-277V AC
WATTAGE	15W
COLOR TEMP	3000K
CRI	90+
FINISH	Graphite
CONSTRUCTION	Aluminum Housing / Polycarbonate Lens
RATING	cETLus Listed (Wet Location - IP65)
RATED LIFE	30,000 Hours
WARRANTY	3 Years





# CRESCENT

Contemporary and elegant, the Crescent sconce is not only graceful, but powerful and long-lasting. Delivering glare-free indirect lighting that's perfect for applications where a clean, yet dramatic aesthetic complements the space.



## ORDERING INFORMATION

**SCO-CRESCENT-GT** Crescent Wall Sconce

## SPECIFICATIONS

LUMENS	550Lm
VOLTAGE	120-277V AC
WATTAGE	10W
COLOR TEMP	3000K
CRI	90+
FINISH	Graphite
CONSTRUCTION	Aluminum Housing / Polycarbonate Lens
RATING	cETLus Listed (Wet Location - IP65)
RATED LIFE	30,000 Hours
WARRANTY	3 Years



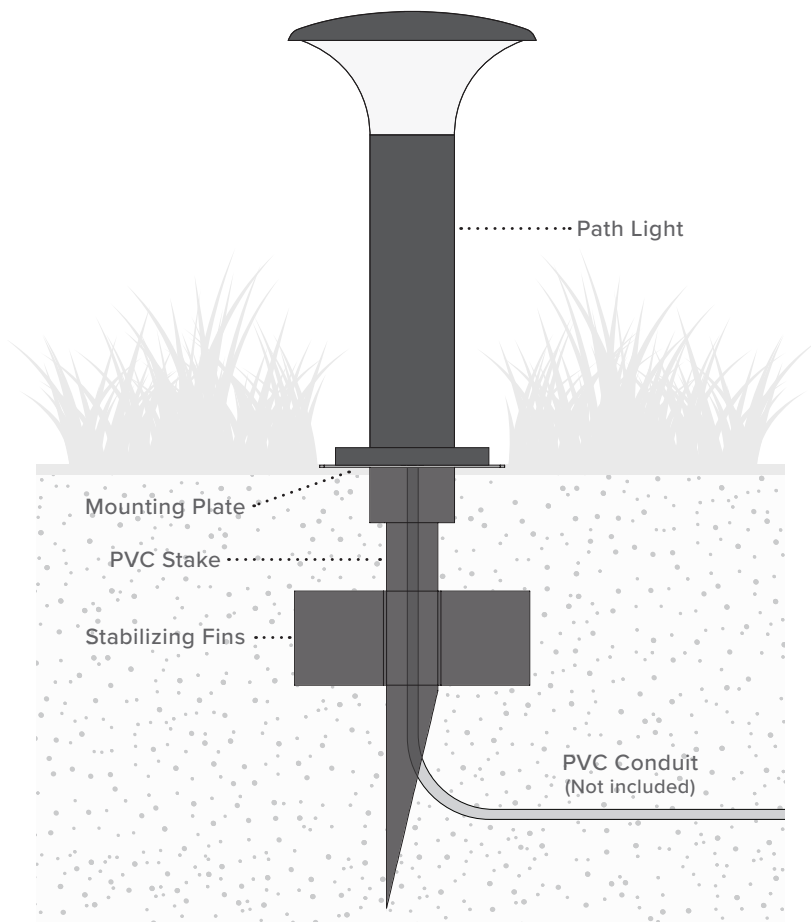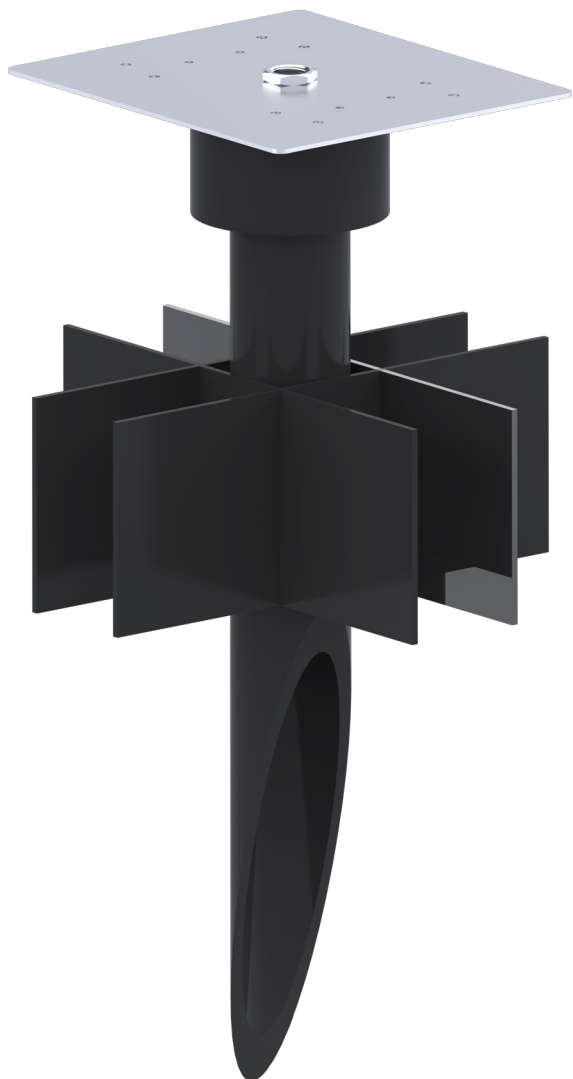

## SOIL MOUNT STAKE

- Designed to be used with FrameWRX path lights
- PVC mounting stake for soft soil applications
- Threaded cap for quick mounting plate installation
- Stainless steel universal mounting plate
- PVC tube construction with stabilizing fins

### ORDERING INFORMATION

**PATH-SMS** Path Light Soil Mount Stake

### SPECIFICATIONS

SERIES	PATH-SMS
CONSTRUCTION	Stainless Steel Mounting plate
	PVC - Tube / Cap / Fins
DIMENSIONS	Mounting Plate - (7-7/8" x 6-7/8")
	PVC Stake - (2-1/2" inner dia. x 19")
	Stabilizing Fins - (7-3/4" x 3-3/4")





## LED-TR 12V TRANSFORMER

- 12V AC dimmable magnetic transformer
- Powder coated stainless steel enclosure
- Designed for wall mount installation only
- Easy wire compartment access with 1/2" knockouts
- Features manual reset switch
- NEMA 3R outdoor rated

### ORDERING INFORMATION

LED-TR-30-12	30W (Class 2) Magnetic Transformer
LED-TR-60-12	60W (Class 2) Magnetic Transformer
LED-TR-100-12	100W Magnetic Transformer
LED-TR-150-12	150W Magnetic Transformer

### SPECIFICATIONS

SERIES	LED-TR 12V
MAX LOAD	30W / 60W / 100W / 150W
MIN. LOAD	40%
INPUT VOLTAGE	3000K
OUTPUT VOLTAGE	12V AC, 120Hz*
DIMMING	Forward Phase / MLV / TRIAC
CONSTRUCTION	Stainless Steel Housing
RATING	(30W / 60W) cETLus Listed (100W / 150W) cULus Listed





**AMERICAN LIGHTING**  
BRIGHT IDEAS • INNOVATIVE SOLUTIONS

[www.AmericanLighting.com](http://www.AmericanLighting.com)  
11775 E. 45th Ave. Denver, CO 80239  
Phone: 800.880.1180 Fax: 303.695.7633  
American Lighting Inc. All rights reserved ©2018

REV. 1753