

2020 SUPPLEMENT



AFD[®]



An industry leader in decorative and functional LED lighting design, we have maintained our respected position in the lighting industry via our commitment to ongoing product innovation and portfolio expansion.

By fully understanding the needs and expectations of our customers, we will continue advancing the use of sustainable LED lighting solutions with the focus of enhancing the performance and quality of light in any space illuminated by our products.

And with versatile lighting solutions for a wide range of commercial and residential applications, AFX products cover a range of design aesthetics to complement any architectural style.

lighting your vision.





TABLE OF CONTENTS

Pendant p.4-17

Ceiling p.18-24

Sconce p.25-31

Vanity p.32-37

Fixed Rail..... p.38-39







Outdoor p.40-46

Utility p.47

Index..... p.48



KEY

- LED 
- Dimmable Option 
- American Disability Act 
- Wet Location 
- Emergency Battery Back-Up 
- ENERGY STAR® Qualified 

3in1 color temperature



“3 in 1” icon represents products that offer a built-in adjustable color temperature feature.





Black

CADEN


- Luminous acrylic cylinder
- White acrylic diffuser
- 9 ft. adjustable cord

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI

Satin Nickel	Black	Satin Brass*	LED	Delivered Lumens	CCT	Pendant	
						DIA.	H
CADP24L30UDSN	CADP24L30UDBK	CADP24L30UDSB	25W	2036	3000K	2-1/2"	24"
CADP36L30UDSN	CADP36L30UDBK	CADP36L30UDSB	29W	2665	3000K	2-1/2"	36"
CADP48L30UDSN	CADP48L30UDBK	CADP48L30UDSB	34W	2946	3000K	2-1/2"	48"

*Minimum order quantity required, consult factory.





Satin Nickel Caden Shown



Cream




White

HUNT

- Linen shade
- White bottom acrylic diffuser
- Satin nickel canopy
- 9 ft. adjustable cord
- Medium base socket, 60W MAX*
(lamps not included)

Cream	White	Qty. Lamp	DIA. H
HTP08MBSNCR	HTP08MBSNWH	1 60W (MAX)*	8" 10"

*Sockets can be labeled for reduced wattage upon request.






MAE

- White linen side and bottom shade
- Satin nickel canopy
- 9 ft. adjustable cord
- Medium base socket, 60W MAX* (lamps not included)

Linen White	Qty.	Lamp	DIA.	H
MAEP20MBSNLW	3	60W (MAX)*	20"	10"

*Sockets can be labeled for reduced wattage upon request.





Clear

Aqua


Clear Crackle

ARMITAGE

- Clear, crackle or tinted glass
- Satin nickel canopy and socket
- 9 ft. adjustable cord
- Medium base socket, 60W MAX* (lamps not included)

	Clear Crackle	Brown	Clear	Aqua	Qty.	Lamp	Pendant DIA. H
Monopoint	AGP10MBSNCC	AGP10MBSNBR	AGP10MBSNCL	AGP10MBSNAQ	1	60W (MAX)*	10" 8"
3-Light Linear	AGP10MBSNCCLNR3	AGP10MBSNBRLNR3	AGP10MBSNCLLNR3	AGP10MBSNAQLNR3	3	60W (MAX)*	10" 8"
3-Light Round	AGP10MBSNCCRND3	AGP10MBSNBRRND3	AGP10MBSNCLRND3	AGP10MBSNAQRND3	3	60W (MAX)*	10" 8"

*Sockets can be labeled for reduced wattage upon request.

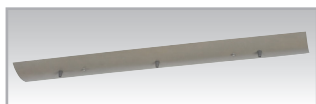

3-Light Linear Canopy
41" L x 5" W x 1-1/2" D



3-Light Round Canopy
15-1/8" DIA. x 1-3/8" H

LED Options



See page 43 of full line catalog for integrated LED options.



Brown Armitage Shown





Clear Swirl



Brown




Clear

HERMOSA

- Clear or tinted glass
- Satin nickel canopy and socket
- 9 ft. adjustable cord
- Medium base socket, 60W MAX* (lamps not included)

	Clear Swirl	Brown	Clear	Aqua	Qty.	Lamp	Pendant DIA.	H
Monopoint	HRP06MBSNCS	HRP06MBSNBR	HRP06MBSNCL	HRP06MBSNAQ	1	60W (MAX)*	6"	16"
3-Light Linear	HRP06MBSNCSLNR3	HRP06MBSNBRLNR3	HRP06MBSNCLLNR3	HRP06MBSNAQLNR3	3	60W (MAX)*	6"	16"
3-Light Round	HRP06MBSNCSRND3	HRP06MBSNBRRND3	HRP06MBSNCLRND3	HRP06MBSNAQRND3	3	60W (MAX)*	6"	16"

*Sockets can be labeled for reduced wattage upon request.

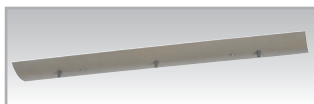

3-Light Linear Canopy
41" L x 5" W x 1-1/2" D



3-Light Round Canopy
15-1/8" DIA. x 1-3/8" H

LED Options



See page 43 of full line catalog for Integrated LED options.





Smoke




Steel Blue

SPUN

- Hand-blown glass with white pattern molten glass cane
- Satin nickel canopy and socket
- 9 ft. adjustable cord
- Medium base socket, 60W MAX* (lamps not included)

	Clear	Smoke	Steel Blue	Qty.	Lamp	Pendant DIA. H
Monopoint	SPP05MBSNCL	SPP05MBSNSM	SPP05MBSNSB	1	60W (MAX)*	5" 16-3/4"
3-Light Linear	SPP05MBSNCLLN3	SPP05MBSNSMLNR3	SPP05MBSNSBLNR3	3	60W (MAX)*	5" 16-3/4"
3-Light Round	SPP05MBSNCLRND3	SPP05MBSNSMRND3	SPP05MBSNSBRND3	3	60W (MAX)*	5" 16-3/4"
6-Light Round	SPP05MBSNCLRND6	SPP05MBSNSMRND6	SPP05MBSNSBRND6	6	60W (MAX)*	5" 16-3/4"

*Sockets can be labeled for reduced wattage upon request.

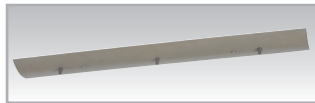

3-Light Linear Canopy
41" L x 5" W x 1-1/2" D



3-Light Round Canopy
15-1/8" DIA. x 1-3/8" H



6-Light Round Canopy
15-1/8" DIA. x 1-3/8" H

LED Options



See page 41 of full line catalog
for Integrated LED options.




VIEW

- Hand-blown glass
- Satin nickel canopy and socket
- 9 ft. adjustable cord
- Medium base socket, 60W MAX* (lamps not included)

	Clear	White	Cream	Qty.	Lamp	Pendant Dia. H
Monopoint	VIP05MBSNCL	VIP05MBSNWH	VIP05MBSNCR	1	60W (MAX)*	4-5/8" 16"
3-Light Linear	VIP05MBSNCLLN3	VIP05MBSNWHLN3	VIP05MBSNCRLN3	3	60W (MAX)*	4-5/8" 16"
3-Light Round	VIP05MBSNCLRND3	VIP05MBSNWHRND3	VIP05MBSNCRND3	3	60W (MAX)*	4-5/8" 16"
6-Light Round	VIP05MBSNCLRND6	VIP05MBSNWHRND6	VIP05MBSNCRND6	6	60W (MAX)*	4-5/8" 16"

*Sockets can be labeled for reduced wattage upon request.

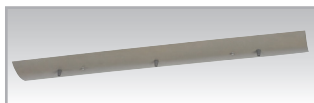

3-Light Linear Canopy
41" L x 5" W x 1-1/2" D



3-Light Round Canopy
15-1/8" DIA. x 1-3/8" H



6-Light Round Canopy
15-1/8" DIA. x 1-3/8" H

LED Options



See page 47 of full line catalog
for integrated LED options.



White



Cream

SOHO


- Hand-blown glass
- Satin nickel canopy and socket
- 9 ft. adjustable cord
- Medium base socket, 60W MAX* (lamps not included)

	White	Cream	Qty.	Lamp	Pendant DIA.	H
Monopoint	SSP04MBSNWH	SSP04MBSNCR	1	60W (MAX)*	3-7/8"	14"
3-Light Linear	SSP04MBSNWHLNR3	SSP04MBSNCRLNR3	3	60W (MAX)*	3-7/8"	14"
3-Light Round	SSP04MBSNWHRND3	SSP04MBSNCRRND3	3	60W (MAX)*	3-7/8"	14"
6-Light Round	SSP04MBSNWHRND6	SSP04MBSNCRRND6	6	60W (MAX)*	3-7/8"	14"

*Sockets can be labeled for reduced wattage upon request.




∅ DIA.

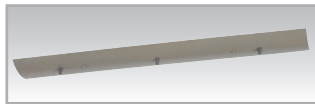

3-Light Linear Canopy
41" L x 5" W x 1-1/2" D



3-Light Round Canopy
15-1/8" DIA. x 1-3/8" H



6-Light Round Canopy
15-1/8" DIA. x 1-3/8" H

LED Options



See page 47 of full line catalog
for Integrated LED options.






HAVEN

- Fabricated metal housing
- White acrylic diffuser
- Adjustable aircraft cable provided
- 3 ft. adjustable rigid stem expandable up to 9 ft.
- Additional stems sold separately

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

	LED	Delivered Lumens	Adjustable CCT	DIA.	H
Satin Nickel					
HVNP13LAJUDSN	17W	946	3000K/3500K/4000K	12-5/8"	5-3/4"
HVNP17LAJUDSN	29W	1600	3000K/3500K/4000K	16-3/4"	5-3/4"
HVNP21LAJUDSN	40W	1919	3000K/3500K/4000K	21"	5-3/4"



Companions





Polished Chrome

JAXX

- Metal housing
- White acrylic diffuser

LED


- 120V TRIAC dimming
- 50,000 hr. LED life, 90 CRI



Black*

Polished Chrome	Black*	Satin Brass*	LED	Delivered Lumens	CCT	DIA.	H
JAXF1515L30D1PC	JAXF1515L30D1BK	JAXF1515L30D1SB	25W	1563	3000K	15"	9"

*Minimum order quantity required, consult factory.







Black

TRIBECA

- Metal housing
- Clear ribbed outer glass diffuser
- White acrylic inner diffuser

LED

- 120V TRIAC dimming
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT



Satin Nickel

		LED	Delivered Lumens	Adjustable CCT	DIA.	D
Satin Nickel	Black	20W	1307	3000K/3500K/4000K	12"	3"
TRBF12LAJD1SN	TRBF12LAJD1BK	31W	1925	3000K/3500K/4000K	15-3/4"	3-1/2"
TRBF15LAJD1SN	TRBF15LAJD1BK					

LED
DIM
3in1
color temperature
3000K/3500K/4000K





ARCHER

- Metal trim bands
- Clear seeded glass
- Medium base socket, 60W MAX* (lamps not included)

Black	Qty.	Lamp	DIA.	D
ACF13BK	2	60W (MAX)*	13"	3-7/8"

*Sockets can be labeled for reduced wattage upon request.







Black

HAVEN

- Fabricated metal housing
- White acrylic diffuser
- Motion sensor and battery back-up option*

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT



Satin Nickel

Satin Nickel		Black	Satin Brass**		LED	Delivered Lumens	Adjustable CCT	DIA.	D
HVNF13LAJUDSN	HVNF13LAJUDBK	HVNF13LAJUDBK	HVNF13LAJUDBS	HVNF13LAJUDBS	17W	946	3000K/3500K/4000K	12-5/8"	5-3/4"
HVNF17LAJUDSN	HVNF17LAJUDBK	HVNF17LAJUDBK	HVNF17LAJUDBS	HVNF17LAJUDBS	29W	1600	3000K/3500K/4000K	16-3/4"	5-3/4"
HVNF21LAJUDSN	HVNF21LAJUDBK	HVNF21LAJUDBK	HVNF21LAJUDBS	HVNF21LAJUDBS	40W	1919	3000K/3500K/4000K	21"	5-3/4"

*Visit website specification page for battery back-up information.

**Minimum order quantity required, consult factory.



Companions





SALERNO


- Metal trim band
- White glass diffuser
- Motion sensor and battery back-up option*

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

Polished Chrome	LED	Delivered Lumens	Adjustable CCT	DIA.	D
SALF13LAJUDPC	17W	1159	3000K/3500K/4000K	13-1/2"	5-1/2"
SALF16LAJUDPC	29W	1776	3000K/3500K/4000K	16-1/4"	5-1/2"

*Visit website specification page for battery back-up information.





LOUIE


- Fabricated metal housing
- White acrylic diffuser
- Vertical or horizontal mounting

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Color	LED	Delivered Lumens	CCT	H	W	D
Black/Gold LOUS0512L30D1BK	16W	346	3000K	13-3/4"	4-1/8"	4"

LED **DIM** **ADA**





SLICE


- Metal housing
- White glass diffuser
- Vertical or horizontal mounting

LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Black	LED	Delivered Lumens	CCT	H	W	D
SLCS0512L30D1BK	13W	756	3000K	13"	4-1/8"	3-1/2"

LED **DIM** **ADA**







LAMBERT

- Ornamental metal accents
- White acrylic diffuser
- Motion sensor option*


LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

Satin Nickel	LED	Delivered Lumens	Adjustable CCT	H	W	D
LBTS0614LAJUDSN	17W	922	3000K/3500K/4000K	13-1/2"	5-12"	3"

*Visit website specification page for information.

LED
DIM
ADA
3in1 color temperature
 3000K/3500K/4000K



Companion



EVANSTON


- Metal accent trim band
- Linen shade
- Up and down light
- Motion sensor option*

LED


- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming at 120V
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

Satin Nickel	LED	Delivered Lumens	Adjustable CCT	H	W	D
EVNS0512LAJUDSN	17W	842	3000K/3500K/4000K	12"	5"	4"

*Visit website specification page for information.



Companion

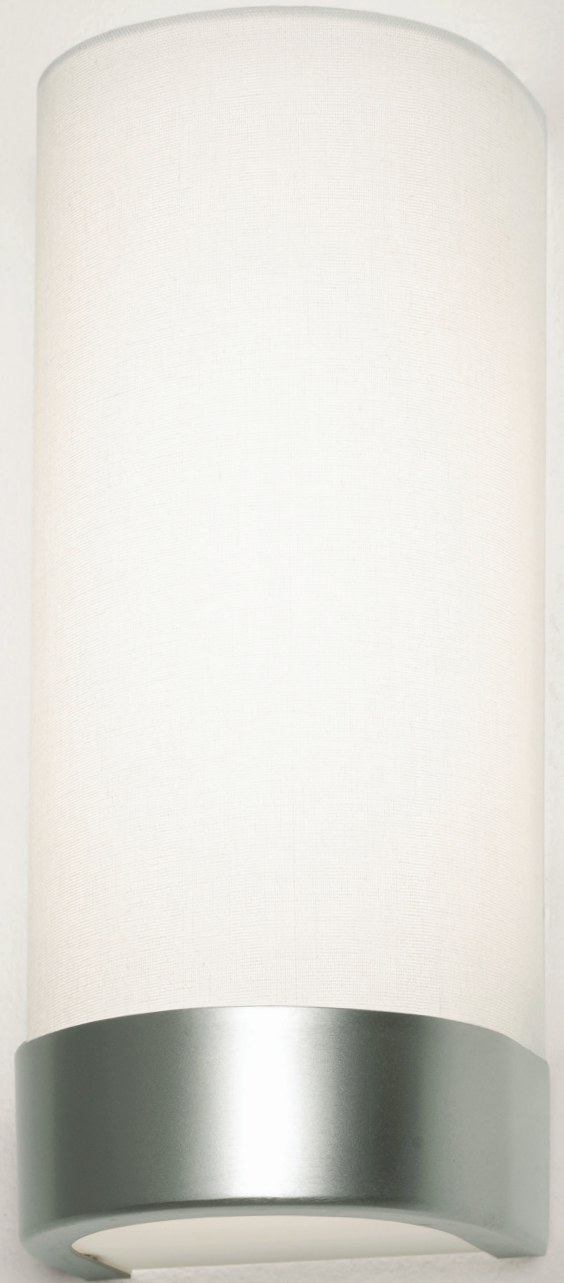



HAVEN

- Fabricated metal housing
- White acrylic diffuser
- Vertical or horizontal mounting
- Motion sensor option*



Satin Nickel



Black

LED

- 120-277V universal-voltage driver
- Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers
- TRIAC and ELV dimming only at 120V
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

Satin Nickel	Black	Satin Brass**	LED	Delivered Lumens	Adjustable CCT	H	W	D
HVNS0513LAJUDSN	HVNS0513LAJUDBK	HVNS0513LAJUDSB	17W	922	3000K/3500K/4000K	12-3/4"	4-3/4"	3"

*Visit website specification page for information.

**Minimum order quantity required, consult factory.



Companions






MILLER

- Fabricated metal housing
- White acrylic diffuser

LED

- 120V TRIAC and ELV dimmable
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

Satin Nickel	LED	Delivered Lumens	Adjustable CCT	L	H	D
MLRV2605LAJD1SN	17W	1580	3000K/3500K/4000K	24-3/8"	4-1/2"	4-1/4"
MLRV3805LAJD1SN	25W	2168	3000K/3500K/4000K	35-3/4"	4-1/2"	4-1/4"





GLACIER

- Metal housing
- Clear ice glass diffusers


LED

- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI




Polished Chrome	LED	Delivered Lumens	CCT	L	H	D
GLCV220524L30D1PC (3-Light)	28W	2403	3000K	22"	4-1/8"	2-3/16"
GLCV310532L30D1PC (4-Light)	38W	3184	3000K	29-3/8"	4-1/8"	2-3/16"

LED **DIM** **ADA**

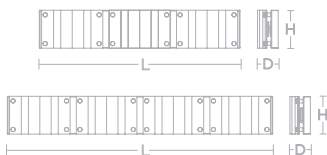



Black

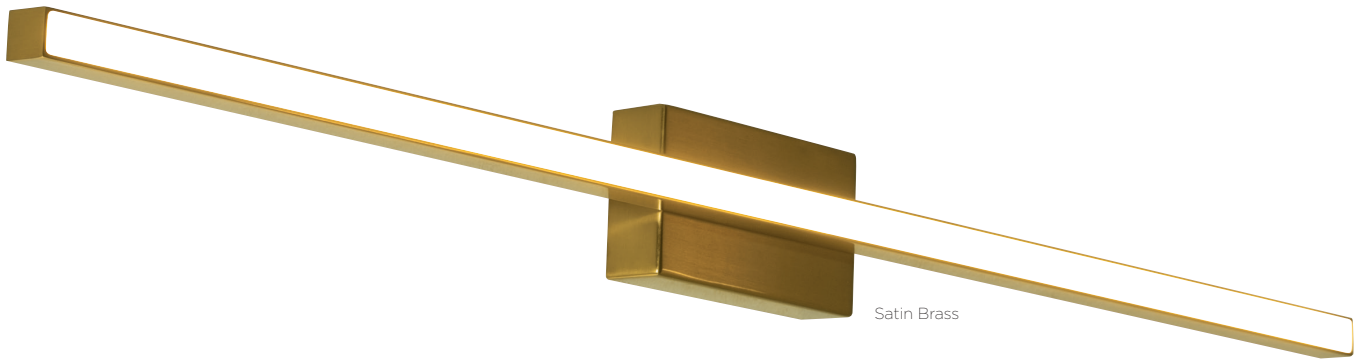

Satin Brass

BARLOW

- Metal housing
- Frosted acrylic diffuser
- Horizontal or vertical mounting
- For use with a 2" x 4" electrical box

LED

- 120V TRIAC dimming
- 50,000 hr. LED life, 90 CRI

						Delivered Lumens		
Black	Polished Chrome	Satin Brass	LED	Delivered Lumens	CCT	L	H	D
BARV2403L30D1BK	BARV2403L30D1PC	BARV2403L30D1SB	22W	1511	3000K	24"	3"	2-1/4"
BARV3603L30D1BK	BARV3603L30D1PC	BARV3603L30D1SB	30W	2013	3000K	36"	3"	2-1/4"






Polished Chrome Barlow Shown





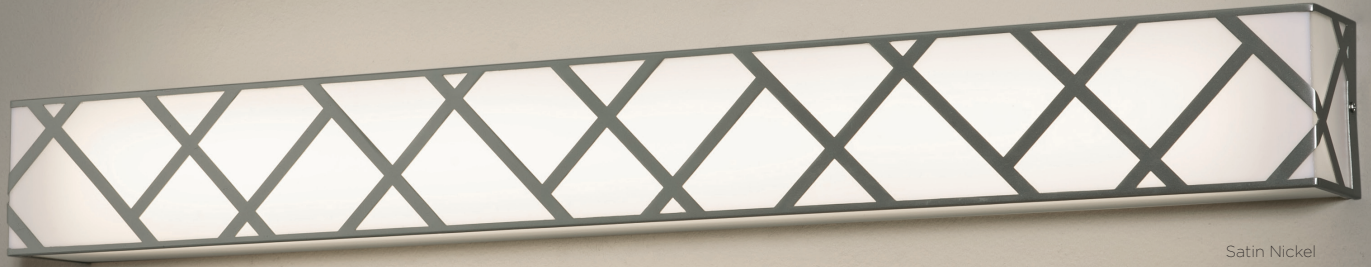

Satin Nickel

HAVEN

- Fabricated metal housing
- White acrylic diffuser

LED

- 120-277V universal-voltage driver, 0-10V dimming
- 50,000 hr. LED life, 90 CRI
- Adjustable CCT

			LED	Delivered Lumens	Adjustable CCT	L	H	D
Satin Nickel	Black	Satin Brass*	23W	1556	3000K/3500K/4000K	27"	4-1/2"	3-5/8"
HVNV2705LAJD2SN	HVNV2705LAJD2BK	HVNV2705LAJD2SB	32W	2034	3000K/3500K/4000K	39"	4-1/2"	3-5/8"
HVNV3905LAJD2SN	HVNV3905LAJD2BK	HVNV3905LAJD2SB						

*Minimum order quantity required, consult factory.



Companions





EVA


- Frosted acrylic diffuser
- Heads swivel and pivot
- Ceiling or wall mount

LED

- 120V TRIAC dimming
- 50,000 hr. LED life, 90 CRI



Polished Chrome	LED	Delivered Lumens	CCT	L	W	H
EVAF0618L30D1PC	30W	1924	3000K	29-5/8"	4-5/8"	6-1/2"





Round

GAGE

- Frosted/clear acrylic diffuser
- Heads swivel and pivot
- Ceiling or wall mount (linear only)

LED

- 120V TRIAC dimming
- 50,000 hr. LED life, 90 CRI





Linear

Round

Polished Chrome	LED	Delivered Lumens	CCT	DIA.	H
GGEF1313L30D1PC	21W	1277	3000K	15-7/8"	6"

Linear

Polished Chrome	LED	Delivered Lumens	CCT	L	W	H
GGEF0618L30D1PC	27W	1662	3000K	29-5/8"	4-5/8"	6"







ELM


- Die-cast aluminum housing
- Durable powder coat finish for outdoor applications
- Solid acrylic diffuser
- Down-light illumination

LED

- Minimum starting temp -4° F/-20° C
- 120-277V universal-voltage driver, 0-10V dimming
- 50,000 hr. LED life, 90 CRI

Black	LED	Delivered Lumens	Adjustable CCT	H	W	D
ELMW0704LAJD2BK	19W	1028	3000K/3500K/4000K	4-1/4"	7"	8"

LED
DIM
WET
3in1 color temperature
 3000K/3500K/4000K






CANE

- Die cast aluminum housing
- Clear seeded glass diffuser
- Durable powder coat finish for outdoor applications

LED

- Minimum starting temp -4° F/-20° C
- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Black	LED	Delivered Lumens	CCT	H	W	D
CANW0618L30D1BK	18W	760	3000K	18-3/4"	5-3/4"	6-1/2"






CAMPTON

- Aluminum housing
- Clear water glass
- Integrated photocell for dusk to dawn operation
- Medium base socket, 60W MAX*
- LED vintage lamp included (2700K, 5W, 15,000 hr.)

Black	Qty.	Lamp	H	W	D
CAMW0814MBK	1	60W (MAX)*	13-3/4"	8"	8-3/4"

*Sockets can be labeled for reduced wattage upon request.







VASARI

- Die-cast aluminum housing
- Durable powder coat finish for outdoor applications
- Clear seeded glass diffuser
- Down-light illumination

LED

- Minimum starting temp -4° F/-20°C
- 120V TRIAC dimmable
- 50,000 hr. LED life, 90 CRI

Black	LED	Delivered Lumens	CCT	H	W	D
VSRW0412L30D1BK	12W	435	3000K	11-3/4"	4"	4"
VSRW0517L30D1BK	18W	568	3000K	17"	5-1/8"	5"






EVERLY

- Metal housing
- Durable powder coat finish for outdoor applications
- Frosted glass diffuser
- Ceiling mount

LED

- Minimum starting temp -4° F/-20° C
- 120-277V universal-voltage driver, 0-10V dimming
- 50,000 hr. LED life, 90 CRI

Black	LED	Delivered Lumens	CCT	DIA.	H
EVYW0405L30D2BK	12W	660	3000K	4-1/4"	4-3/4"
EVYW0408L30D2BK	12W	660	3000K	4-1/4"	8"



Companions




WALL PACK

- Polycarbonate housing
- Clear acrylic diffuser
- Integrated photocell for dusk to dawn operation

LED

- Minimum starting temp -4° F/-20° C
- 120-277V universal-voltage driver
- 50,000 hr. LED life, 90 CRI

Black	LED	Delivered			H	W	D
		Lumens	CCT				
BWSW060822L50MVBK	20W	2200	5000K	8"	5-3/8"	2-1/8"	



RETROFIT KIT

- For ceiling applications
- Easy magnetic mount back plate
- Dual linear LED module
- Replace (2) 32W T8 linear fluorescent

White	LED	Delivered			LED Board (x4)	
		Lumens	CCT	L	W	
RFKIT35	35W	3500	4000K	22-1/4"	7/8"	



SPRING WRAP

- White steel housing
- Clear prismatic diffuser
- Spring loaded end cap for easy lens maintenance

LED

- 120-277V universal voltage driver
- 50,000 hr. LED life, 80 CRI

White	LED	Delivered			L	W	D
		Lumens	CCT				
SPRL052424L40MV	26W	2148	4000K	24"	5-3/8"	2-3/8"	
SPRL054836L40MV	40W	3477	4000K	48"	5-3/8"	2-3/8"	
SPRL074873L40MV	50W	5987	4000K	48"	6-1/2"	3"	



INDEX

ACFI3BK.....	21	JAXF1515L30D1PC.....	18
AGPI0MBSNAQ.....	8	JAXF1515L30D1MB.....	18
AGPI0MBSNAQLNR3.....	8	JAXF1515L30D1SB.....	18
AGPI0MBSNAQRND3.....	8	LBTS0614LAJUDSN.....	28
AGPI0MBSNBR.....	8	LOUS0512L30D1BK.....	25
AGPI0MBSNBRLNR3.....	8	MAEP20MBSNLW.....	7
AGPI0MBSNBRRND3.....	8	MLRV2605LAJD1SN.....	32
AGPI0MBSNCC.....	8	MLRV3805LAJD1SN.....	32
AGPI0MBSNCCLLNR3.....	8	RFKIT35.....	47
AGPI0MBSNCCRND3.....	8	SALF13LAJUDPC.....	24
AGPI0MBSNCL.....	8	SALF16LAJUDPC.....	24
AGPI0MBSNCLLNR3.....	8	SLCS0512L30D1BK.....	26
AGPI0MBSNCLRND3.....	8	SPP05MBSNCL.....	13
BARV2403L30D2BK.....	34	SPP05MBSNCLLNR3.....	13
BARV2403L30D2PC.....	34	SPP05MBSNCLRND3.....	13
BARV2403L30D1SB.....	34	SPP05MBSNCLRND6.....	13
BARV3603L30D1BK.....	34	SPP05MBSNSB.....	13
BARV3603L30D1PC.....	34	SPP05MBSNSBLNR3.....	13
BARV3603L30D2SB.....	34	SPP05MBSNSBRND3.....	13
BWSW060822L40MVBK.....	47	SPP05MBSNSBRND6.....	13
CADP24L30UDBK.....	4	SPP05MBSNSM.....	13
CADP24L30UDSN.....	4	SPP05MBSNSMLNR3.....	13
CADP36L30UDBK.....	4	SPP05MBSNSMRND3.....	13
CADP36L30UDSN.....	4	SPP05MBSNSMRND6.....	13
CADP48L30UDBK.....	4	SPRL074873L40MV.....	47
CADP48L30UDSN.....	4	SSP04MBSNCR.....	15
CAMW0814MBK.....	43	SSP04MBSNCRLLNR3.....	15
CANW0618L30D1BK.....	42	SSP04MBSNCRNRND3.....	15
ELMW0704LAJD2BK.....	41	SSP04MBSNCRNRND6.....	15
EVAF0618L30D1PC.....	38	SSP04MBSNWH.....	15
EVNS051214LAJUDSN.....	29	SSP04MBSNWHLNR3.....	15
EYVW0405L30D2BK.....	46	SSP04MBSNWHRND3.....	15
EYVW0408L30D2BK.....	46	SSP04MBSNWHRND6.....	15
GGEF0618L30D1PC.....	39	TRBF12LAJD1BK.....	20
GGEF1313L30D1PC.....	39	TRBF12LAJDISN.....	20
GLCV220524L30D1PC.....	33	TRBF15LAJD1BK.....	20
GLCV310532L30D1PC.....	33	TRBF15LAJDISN.....	20
HVNV2705LAJD2BK.....	37	VIPO5MBSNCL.....	14
HVNV2705LAJD2SB.....	37	VIPO5MBSNCLLNR3.....	14
HVNV2705LAJD2SN.....	37	VIPO5MBSNCLRND3.....	14
HVNV3905LAJD2BK.....	37	VIPO5MBSNCLRND6.....	14
HVNV3905LAJD2SB.....	37	VIPO5MBSNCR.....	14
HVNV3905LAJD2SN.....	37	VIPO5MBSNCRLLNR3.....	14
HRP06MBSNAQ.....	11	VIPO5MBSNCRNRND3.....	14
HRP06MBSNAQLNR3.....	11	VIPO5MBSNCRNRND6.....	14
HRP06MBSNAQRND3.....	11	VIPO5MBSNWH.....	14
HRP06MBSNBR.....	11	VIPO5MBSNWHLNR3.....	14
HRP06MBSNBRLNR3.....	11	VIPO5MBSNWHRND3.....	14
HRP06MBSNBRRND3.....	11	VIPO5MBSNWHRND6.....	14
HRP06MBSNCL.....	11	VSRW0412L30D1BK.....	45
HRP06MBSNCLLNR3.....	11	VSRW0517L30D1BK.....	45
HRP06MBSNCLRND3.....	11		
HRP06MBSNCS.....	11		
HRP06MBSNCSLNR3.....	11		
HRP06MBSNCSRND3.....	11		
HTP08MBSNCR.....	6		
HTP08MBSNWH.....	6		
HVNF13LAJUDBK.....	23		
HVNF13LAJUDSB.....	23		
HVNF13LAJUDSN.....	23		
HVNF17LAJUDBK.....	23		
HVNF17LAJUDSB.....	23		
HVNF17LAJUDSN.....	23		
HVNF21LAJUDBK.....	23		
HVNF21LAJUDSB.....	23		
HVNF21LAJUDSN.....	23		
HVNP13LAJUDSN.....	17		
HVNP17LAJUDSN.....	17		
HVNP21LAJUDSN.....	17		
HVNS0513LAJUDBK.....	31		
HVNS0513LAJUDSB.....	31		
HVNS0513LAJUDSN.....	31		

©2020 AFX, Inc.
All rights reserved.

Specifications subject to
change without notice.

Specific items may be
protected by patents
or patents pending.





2345 N. Ernie Krueger Circle • Waukegan, IL 60087

847.249.5970 • AFXinc.com