
SATCO® | NUVO®

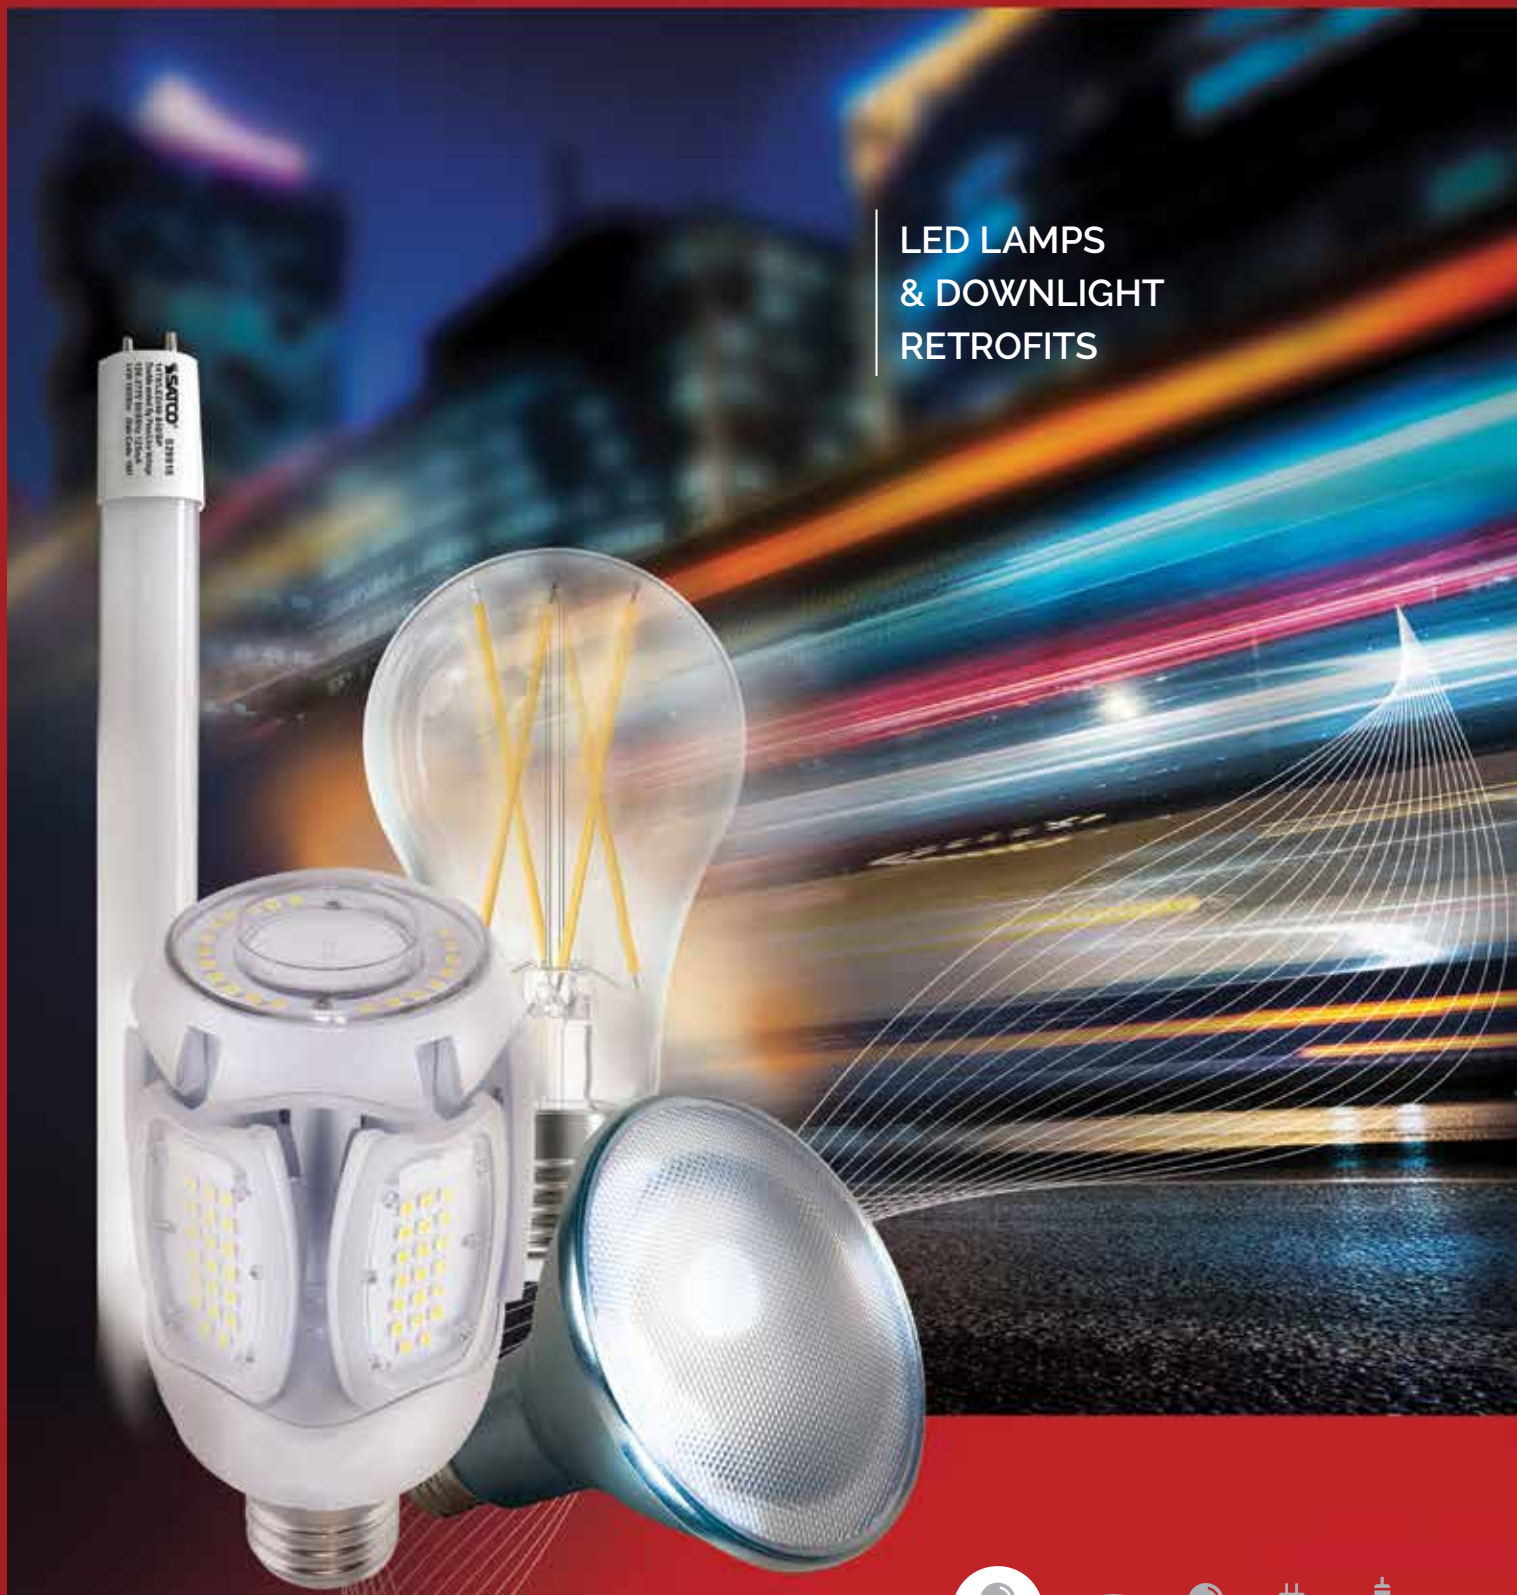

LED LAMPS & DOWNLIGHT RETROFITS

SATCO **LED LAMPS**

SATCO® | NUVO®

SATCO LED lamps offer one of today's largest selections of LED products — providing solutions for the commercial, industrial and residential markets.

We bring quality, value and design to every product we create. With advancing technology, we improve performance, energy savings, safety, ease of installation and maintenance, and overall satisfaction.

We are your partners in success — from convenient packaging options and retail support to inventory supply.

SATCO is the lighting solution you can count on for the products you can rely on!



We do the LIGHT thing. We do the RIGHT thing.™

SATCO is your a single source solution for all of your lighting needs, from emerging LED technologies to decorative fixtures and lighting components, we carry products for nearly every industry and application.

As a turnkey lighting operation, SATCO brings efficiency, value and an ease of doing business to our customers.

Independent and privately owned for over 50 years, SATCO continues to grow because of our traditional values: trust, quality, loyalty and hard work. Agile in practice, unwavering in customer focus...

...we deliver on product, promise & partnership.

Est. 1966

50+ YEARS IN BUSINESS

100% INDEPENDENT PRIVATELY OWNED

15,000+ PRODUCTS

2 MILLION SQ. FT. OF INVENTORY

6 WAREHOUSE LOCATIONS

SATCO® | NUVO®




LED FILAMENT & DECORATIVE LAMPS

The popularity of the exposed bulb in lighting design continues the evolution in filament lamp design. From new shapes in the the filament and structure to amber toned, silver domed and frosted lamps.

Advanced technologies improve energy efficiency, enhance light quality, expand damp and wet location options and offer new lamps in a variety of bases.

Plus, new packaging alternatives are available for your convenience.



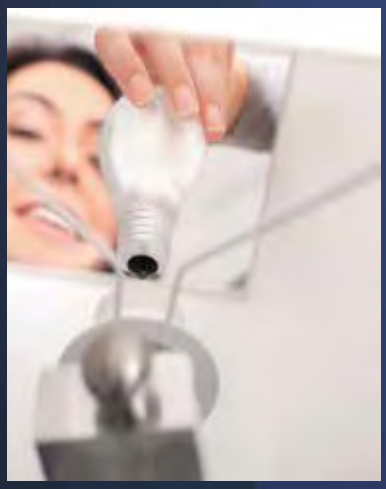

GENERAL SERVICE LAMPS

SATCO's vast offering of LED lamps continues to grow with technologies that help retrofit fixtures in nearly every setting.

Our lamps provide significant energy efficiency while preserving the look and feel traditional bulbs.

We are committed to our customers at every level of business, from retail display packaging, single bulb packs, to contractor's packs for convenience.

All with the quality and assurance you can be confident in.





BR & REFLECTOR LAMPS

SATCO's 2020 offering of LED BR & PAR lamps includes improved efficiency, higher CRI and greater values -- all in a significantly broader range! From our expanded line of GEN2 PAR Silver PARs to our new generation of high lumen and range voltage industrial and commercial PAR lamps; to new choices in MR11 and MR16 lamps, the solutions just keep growing!



We do the LIGHT thing. We do the RIGHT thing.



DOWNLIGHT RETROFITS

SATCO's LED vast line of recessed downlight retrofits offers options in various aesthetics, improved efficiency, and easy installation.

The new generations include additional sizes, finishes and features include gimbals and CCT selectable options.

Retrofit downlights remain one of SATCO's most popular categories of lighting for their value and convenience.





HI-PRO HID REPLACEMENTS

Advancements in our commercial and industrial line of High Lumen Professional Grade lamps continue. From quality of light including higher efficiency to design improvements featuring lighter body weight, advanced heat dissipation and increased internal surge protection -- they just keep getting better.

Plus, many of SATCO's lamps offer add-on sensors and smart options. Large scale lighting projects
just got easier!





CFL & LINEAR FLUORESCENT REPLACEMENT

SATCO's CFL and linear replacement options continue to focus on safety, light quality and the ease of installation when it comes to replacing traditional CFL and linear bulbs.

SATCO's broad line of CFL and linear replacement options for traditional fixture retrofits provide solutions to help bridge your customers' needs into tomorrow
.



We do the LIGHT thing. We do the RIGHT thing.

About Satco **2-5**
LED FILAMENT LAMPS **7-24**
LED Filament Lamps 40W Replacement A15 7
LED Filament Lamps 40W Replacement A19 7
LED Filament Lamps 60W Replacement A19 8
LED Filament Lamps Single Packs 9
LED Filament Lamps Multi-Packs 10
LED Filament Lamps Globes - 16½ 11
LED Filament Lamps Globes - G25 12
LED Filament Lamps Globes - G40 13
LED Filament Lamps Decorative - Candelabra Base/Torpedo 14
LED Filament Lamps Decorative - Medium Base/Torpedo 15
LED Filament Lamps Decorative - Flame Tip 16
Specialty Filament Lamps 17
LED Filament Lamps Vintage Style 18
LED Filament Lamps Vintage Style - Spiral 19
LED Filament Lamps Vintage Style - Spiral in HID Envelopes 20
LED Filament Lamps - Carded 21-22
Satco-Escent LED Lamps 23
Carded LED Specialty Lamps 24
LED A-TYPE **25-42**
40W Replacement LED A19 Lamps 25
60W Replacement LED A19 Lamps 26-27
Low Voltage 9W LED A19 Lamps 27
60W Replacement LED A19 4 Packs 28
60W Replacement LED A19 Display Packs 29
60W Replacement LED A19 2 Packs Display 29
60W Replacement LED A19 10 Packs 28
60W Replacement LED A19 100 Piece Contractor Packs 30
75W Replacement LED A19 Lamps 31
75W Replacement LED A19 4 Packs 32
100W Replacement LED A19, A21 Lamps 33
100W Replacement LED A19 4 Packs 34
125W Replacement 120-277V LED A21 Lamps 34
Hi-Pro A21 Lamps 35
Hi-Pro A23 & A25 Lamps 36
5W Decorative Flame Lamps 35
60W Replacement LED A19 Dusk to Dawn 37
3-Way A19 & A21 Lamps 38
40W & 60W Candelabra Base Replacement A19 Lamps 39
LED A19 Colors 39
40W Replacement LED A15 Lamps 40
Decorative LED Lamps 41
LED Linear T10 Lamps 41
LED Squat CFL Lamp Replacement with GU24 Base 42
BR & HALOGEN REPLACEMENT LAMPS **43-62**
R20 Reflectors 80 & 90 CRI 43
BR Reflectors 80 & 90 CRI 43
8W BR30 LED 2 Pack Display 44
11.5W & 16.5W BR40 LED Reflectors 80 & 90 CRI 44
10W BR30 LED Reflector Display Packs & 6 Packs 45
7W LED PAR20 - Amber 45
Silver PAR - Gen 2 -PAR20 46
Silver PAR - Gen 2 - PAR30/SN, PAR30/LN 47
Silver PAR - Gen 2 - PAR38 48
LED Silver PAR - G1 Series - 7W PAR20 Lamps 49
LED Silver PAR - G1 Series - 13W PAR30 Short Neck Lamps 50
LED Silver PAR - G1 Series -13W PAR30 Long Neck Lamps 51
15W & 18W LED PAR38 Lamps 52
Econo LED PAR Lamps 53
High Lumen LED PAR Lamps 54
Hi-Pro LED PAR30 Lamps 55
Hi-Pro LED PAR38 Lamps 5
LED PAR 16 4.5W & 6.5W Lamps 56
1.6W & 3W, 12V LED MR11 Lamps 56
LED MR16 Lamps 57
MR16 GU10 Base LED Lamps 58
Carded LED MR Lamps 59
LED MR16 E26 Base Lamps 60
LED Elevator Lamps 60
Silicon LED Replacements for Halogen G4, G6.35, G8 and G9 Lamps 59
Silicon LED Replacements for Halogen E11, E12, BA15D, and BA15S Lamps 60
DOWNLIGHT RETROFITS **63-70**
4", 5/6" LED Recessed Downlight Retrofits with Selectable Color Temperature Settings 63
4" LED Recessed Downlight Retrofits 64
5"/6" LED Recessed Downlight Retrofits 65
5"/6" LED Recessed Downlight Retrofits 66
12V LED Recessed Downlight Retrofits 67
Quick Trim™ 4", 5/6" LED Recessed Downlight Retrofit 2 Packs 67
4" LED Square Trim Recessed Downlight Retrofits 68
5"/6" Square Trim Recessed Downlight Retrofits 69
Hi-Pro LED Lamps 70
HI-PRO HID REPLACEMENTS **71-83**
Hi-Pro 277-347V High Lumen LED Lamps 71
Hi-Pro LED 12-24V Low Voltage Lamps 72
Hi-Pro LED Post Top Lamps 72
Third Generation Hi-Pro LED Multi-Beam Lamps 73
60W LED Multi-Beam Utility Light with and without Motion Sensor 74
High Voltage Hi-Pro LED Lamps 277V-480V 75
Hi-Pro 360 Lamps 76
GEN2 Hi-Pro Shoebox Lamp with Smart Port 77
Hi-Pro LED Wall Pack Lamp Series 78
Hi-Pro LED High Bay/Low Bay Lamps 79
Hi-Pro Sensors 80
Instant Hi-Bay Fixture 81
Hi-Pro LED Temporary Work Lights 82
Hi-Pro Temporary Construction String Light Set - 50 Ft. 83
CFL & LINEAR FL REPLACEMENTS **84-107**
LED/CFL Ballast Bypass Type B Replacement Lamps 2-Pin G23, GX23 Base 84
LED/CFL Dual Mode (Ballast Bypass Type A/Ballast Compatible Type B) Lamps 85
LED/CFL Type A Direct Replacement Lamps - 4-Pin (Electronic Ballasts), 2-Pin (Magnetic Ballasts) 86
PL/LED Ballast Bypass Type B Replacement Lamps 87
LED/CFL Type A Direct Replacement Lamps 4-Pin (Electronic Ballasts) 88
LED/CFL Ballast Bypass Type B Replacement Lamps 2-Pin GX23 Ballast Bypass, Gu24 Base, E26 Base 89
Satco 2G11 PLL 36W & 40W Type B Replacement Lamps 90
Satco 2', 3' & 6" U-Bend LED Type A T8 Lamps 91
Satco 12W & 15W, 4' LED Type A T8 Lamps 92
Linear LED Ballast Bypass Type B T8 Series 93
Dimmable 13.5W Linear LED T8 Ballast Bypass Type B Lamps 94
Premium LED T8 Ballast Bypass Type B, True Flicker-Free Lamps 95
15W Linear LED Ballast Bypass Type B T8 Series 96
Linear LED Ballast Bypass Type B T8 U-Bend Series 96
Slimline 4', 6', 8' T8 Ballast Bypass Type B Series 97
43W Linear LED Ballast Bypass 8' Type B T8 Series 97
25W, 4' Linear LED Type A T5 Lamps 98
Satco LED T5 Type B Ballast Bypass Series 98
Satco LED T5 Mini Bi-Pin (G5) Ballast Bypass Type B Series 99
LED T8 Dual Mode (Ballast Bypass Type B/Ballast Compatible Type A) 1-5/8" U-Bend Lamps 100
LED T8 Dual Mode (Ballast Bypass Type B/Ballast Compatible Type A) Linear Lamps 101
System Performance - LED T8 Dual Mode Linear - Ballast Compatible 102
Linear LED T8, T5HO Type C System 103
Linear LED T8 Type C Lamps 104
Linear LED T6 Type C Lamps 104
LED T5 Type C Drivers 104
8" & 12" T9 LED Ballast Bypass Type B Circeline Lamps 105
LED Emergency Back-Up 106
LED T8 Type B Sign Lamps Extended Line with New Length Options 107
LIGHT ENGINE FIXTURE RETROFIT **108**
Circular LED Module Retrofit Kits 108
SATCO RETAIL SUPPORT **109-110**
INDEX **111-114**

Satco has two lines of product to help you meet California's Building and Appliance codes:
Building Code (Title 24): The full line of Joint Appendix 8 (JA8) lamps are certified to the Title 24 2016 building code. These products will help you comply with the newest California residential building codes.
Appliance Code (Title 20): Lamps and Retrofit Kits are considered appliances in the California Code, and Title 20 is one of the most stringent in the country. Satco has a full line of products that are compliant with this code.

As an ongoing effort on behalf of Satco Products, Inc. to remain dedicated to the improvement of our products, we reserve the right to change specifications. The information contained in this specification guide is subject to change without notice. We cannot be responsible for typographical errors.

LED filament lamps

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures**
- c-UL-us listed
- CEC T20/T24 Available
- ENERGY STAR certified*
- 3 Year warranty



S29874
A15



S21102
A15



S8550
A15

LED Filament Lamps - A15 - 40W Replacement

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S29874*	5A15/CL/LED/E26/27K/ES/120V	5	A15	E26	120	Clear	2700K	450	80	3 ⅜	15K	045923298745	24/6
S21100	5A15/CL/LED/E26/3K/ES/120V	5	A15	E26	120	Clear	3000K	450	80	3 ⅜	15K	045923200021	24/6
S21101	5A15/CL/LED/E26/4K/ES/120V	5	A15	E26	120	Clear	4000K	450	80	3 ⅜	15K	045923200038	24/6
S21102	5A15/FR/LED/E26/3K/ES/120V	5	A15	E26	120	Frost	3000K	450	80	3 ⅜	15K	045923200045	24/6
90 CRI—CEC/T20													
S8550*	5A15/LED/927/CL/120V	5	A15	E26	120	Clear	2700K	450	90	3 ⅜	15K	045923085505	24/6
S11350*■	5A15/LED/927/FR/120V	5	A15	E26	120	Frost	2700K	450	90	3 ½	15K	045923113505	24/6
S11351*■	5A15/LED/930/CL/120V	5	A15	E26	120	Clear	3000K	450	90	3 ½	15K	045923113512	24/6

■ Also T24 compliant. JA8-2019



S29875
A19



S29824, S21104
A19

LED Filament Lamps - A19 - 40W Replacement

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S29875*	5A19/CL/LED/E26/27K/ES/120V	5	A19	E26	120	Clear	2700K	450	80	4 ⅛	15K	045923298752	24/6
S21103	5A19/CL/LED/E26/3K/ES/120V	5	A19	E26	120	Clear	3000K	450	80	4 ⅛	15K	045923200052	24/6
S29824	5A19/SW/LED/E26/27K/ES/120V	5	A19	E26	120	Soft White	2700K	450	80	4 ⅛	15K	045923298240	24/6
S21104	5A19/SW/LED/E26/3K/ES/120V	5	A19	E26	120	Soft White	3000K	450	80	4 ⅛	15K	045923201042	24/6
90 CRI—CEC/T20													
S11352*■	5A19/LED/927/CL/120V	5	A19	E26	120	Clear	2700K	450	90	4 ⅜	15K	045923113529	24/6
S11354*■	5A19/LED/927/SW/120V	5	A19	E26	120	Soft White	2700K	450	90	4 ⅜	15K	045923113543	24/6
S11353*■	5A19/LED/930/CL/120V	5	A19	E26	120	Clear	3000K	450	90	4 ⅜	15K	045923113536	24/6

■ Also T24 compliant. JA8-2019

**See warranty for details.

LED filament lamps
60 Watt replacements



S29876, S29894,
S28850, S39879




S39825, S39809



S9826



Beam Profile



Beam Angle: 360°

LED Filament Lamps - A19 - 60W Replacement

360° BEAM · DIMMABLE · ** ENCLOSED FIXTURE · DAMP LOCATION · c UL us LISTED · * ENERGY STAR

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S29876*	7A19/CL/LED/E26/27K/ES/120V	7	A19	E26	120	Clear	2700K	800	80	4 1/8	15K	045923298769	24/6
S29894	7A19/CL/LED/E26/3K/ES/120V	7	A19	E26	120	Clear	3000K	800	80	4 1/8	15K	045923298943	24/6
S28850*	7A19/CL/LED/E26/4K/ES/120V	7	A19	E26	120	Clear	4000K	800	80	4 1/8	15K	045923288500	24/6
S39825*	7.5A19/SW/LED/E26/27K/120V	7.5	A19	E26	120	Soft White	2700K	800	80	4 1/8	15K	045923398254	24/6
S39809	7.5A19/SW/LED/E26/3K/120V	7.5	A19	E26	120	Soft White	3000K	800	80	4 1/8	15K	045923398094	24/6
S9826†	6.5A19/SLV/LED/E26/27K/120V	6.5	A19	E26	120	Silver Crown	2700K	650	80	4 1/8	15K	045923098260	24/6
90 CRI—CEC/T20													
S39879■	8A19/LED/927/CL/120V	8	A19	E26	120	Clear	2700K	800	90	4 3/8	15K	045923298790	24/6
S11356*■	8A19/LED/927/SW/120V	8	A19	E26	120	Soft White	2700K	800	90	4 3/8	15K	045923113567	24/6
S11355*■	8A19/LED/930/CL/120V	8	A19	E26	120	Clear	3000K	800	90	4 3/8	15K	045923113550	24/6

■ Also T24 compliant. † Silver crown are 180˚ beam angle.

**See warranty for details.

LED filament lamps 75 & 100 Watt replacements



S9845, S9846



S11500, S11501, S11502




S11505, S11506, S11507



S11510, S11511, S11512





Beam Profile

Beam Angle: 360°

LED Filament Lamps - Single Pks

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
75 Watt Replacement													
S9845*†	9A19/CL/LED/E26/27K/120V	9	A19	E26	120	Clear	2700K	1100	80	4 ½	15K	045923098451	24
S9846*†	9A19/CL/LED/E26/30K/120V	9	A19	E26	120	Clear	3000K	1100	80	4 ½	15K	045923098468	24
S11500◆	9A19/FR/LED/E26/827/120V	9	A19	E26	120	Frost	2700K	1100	80	4	15K	045923115004	24
S11501◆	9A19/FR/LED/E26/830/120V	9	A19	E26	120	Frost	3000K	1100	80	4	15K	045923115011	24
S11502◆	9A19/FR/LED/E26/840/120V	9	A19	E26	120	Frost	4000K	1100	80	4	15K	045923115028	24
90 CRI—CEC/T20													
S11357*■	11A19/LED/927/CL/120V	11	A19	E26	120	Clear	2700K	1100	90	5 1/16	15K	045923113574	24
S11359*■	11A19/LED/927/SW/120V	11	A19	E26	120	Soft White	2700K	1100	90	5 1/16	15K	045923113598	24
S11358*■	11A19/LED/930/CL/120V	11	A19	E26	120	Clear	3000K	1100	90	5 1/16	15K	045923113581	24
100 Watt Replacement													
S11505◆	13A19/FR/LED/E26/827/120V	13	A19	E26	120	Frost	2700K	1500	80	4 3/8	15K	045923115059	24
S11506◆	13A19/FR/LED/E26/830/120V	13	A19	E26	120	Frost	3000K	1500	80	4 3/8	15K	045923115066	24
S11507◆	13A19/FR/LED/E26/840/120V	13	A19	E26	120	Frost	4000K	1500	80	4 3/8	15K	045923115073	24
S11510◆	12A19/CL/LED/E26/827/120V	12	A19	E26	120	Clear	2700K	1500	80	4 3/8	15K	045923115103	24
S11511◆	12A19/CL/LED/E26/830/120V	12	A19	E26	120	Clear	3000K	1500	80	4 3/8	15K	045923115110	24
S11512◆	12A19/CL/LED/E26/840/120V	12	A19	E26	120	Clear	4000K	1500	80	4 3/8	15K	045923115127	24
90 CRI—CEC/T20													
S11360*■	14A21/LED/927/CL/120V	14	A21	E26	120	Clear	2700K	1600	90	4 ½	15K	045923113604	24
S11362*■	14A21/LED/927/SW/120V	14	A21	E26	120	Soft White	2700K	1600	90	4 ½	15K	045923113628	24
S11361*■	14A21/LED/930/CL/120V	14	A21	E26	120	Clear	3000K	1600	90	4 ½	15K	045923113611	24

■ Also T24 compliant. JA8-2019

See warranty for details.

LED filament lamps
Multi-Packs



S21712, S21713, S21734



S21714



S11503, S11504




S11508, S11509



S11513, S11514



Beam Profile



Beam Angle: 360°

LED A19 Filament Lamp - Multi-Pks

360° BEAM · DIMMABLE · ** ENCLOSED FIXTURE · † DAMP LOCATION · ◆ WET LOCATION · c UL us LISTED · * ENERGY STAR

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
40 Watt Replacement													
S21712*†	5A19/CL/LED/E26/27K/120V/4PK	5	A19	E26	120	Clear	2700K	450	80	4 ⅛	15K	045923217128	12/4Pks
60 Watt Replacement													
S21713*†	7.5A19/CL/LED/E26/27K/120V/4PK	7.5	A19	E26	120	Clear	2700K	800	80	4 ⅛	15K	045923217135	12/4Pks
S21714*†	7.5A19/SW/LED/E26/27K/120V/4PK	7.5	A19	E26	120	Soft White	2700K	800	80	4 ⅛	15K	045923217142	12/4Pks
S21734*	7.5A19/CL/LED/E26/3K/120V/4PK	7.5	A19	E26	120	Clear	3000K	800	80	4 ⅛	15K	045923217340	12/4Pks
75 Watt Replacement													
S11503◆	9A19/FR/LED/E26/827/120V/4PK	9	A19	E26	120	Frost	2700K	1100	80	4	15K	045923115035	12/4Pks
S11504◆	9A19/FR/LED/E26/830/120V/4PK	9	A19	E26	120	Frost	3000K	1100	80	4	15K	045923115042	12/4Pks
100 Watt Replacement													
S11513◆	12A19/CL/LED/E26/827/120V/4PK	12	A19	E26	120	Clear	2700K	1500	80	4 ⅜	15K	045923115134	12/4Pks
S11514◆	12A19/CL/LED/E26/830/120V/4PK	12	A19	E26	120	Clear	3000K	1500	80	4 ⅜	15K	045923115141	12/4Pks
S11508◆	13A19/FR/LED/E26/827/120V/4PK	13	A19	E26	120	Frost	2700K	1500	80	4 ⅜	15K	045923115080	12/4Pks
S11509◆	13A19/FR/LED/E26/830/120V/4PK	13	A19	E26	120	Frost	3000K	1500	80	4 ⅜	15K	045923115097	12/4Pks

**See warranty for details.

LED filament lamps
Globes - G16½

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures***
- c-UL-us listed
- CEC T20/T24 Available
- ENERGY STAR certified*
- 3 Year warranty



S12105
G16



S12102, S12103, S12104
G16



S12101
G16



S9870, S29871, S29988, S8553
G16 1/2

LED Globe Filament Lamps - G16½

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9870	2.5G16/LED/CL/27K/120V/E12	2.5	G16 1/2	E12	120	Clear	2700K	200	80	3 3⁄16	15K	045923098703	24/6
S29871*	4G16/LED/CL/27K/120V/E12	4	G16 1/2	E12	120	Clear	2700K	350	80	3 3⁄16	15K	045923298714	24/6
S29988*	5.5G16/LED/CL/27K/120V/E12	5.5	G16 1/2	E12	120	Clear	2700K	500	80	3 1⁄8	15K	045923099885	24/6
S12100	4.5G16/LED/CL/3K/120V/E12	4.5	G16 1/2	E12	120	Clear	3000K	500	80	3 1⁄8	15K	045923121005	24/6
S12101	5.5G16/LED/SW/3K/120V/E12	5.5	G16 1/2	E12	120	Soft White	3000K	500	80	3 1⁄8	15K	045923121012	24/6
S12102	5.5G16/LED/CL/27K/120V/E26	5.5	G16 1/2	E26	120	Clear	2700K	500	80	3 1⁄8	15K	045923121029	24/6
S12103	5.5G16/LED/CL/3K/120V/E26	5.5	G16 1/2	E26	120	Clear	3000K	500	80	3 1⁄8	15K	045923121036	24/6
S12104	5.5G16/LED/CL/4K/120V/E26	5.5	G16 1/2	E26	120	Clear	4000K	500	80	3 1⁄8	15K	045923121043	24/6
S12105	5.5G16/LED/SW/3K/120V/E26	5.5	G16 1/2	E26	120	Soft White	3000K	500	80	3 1⁄8	15K	045923121050	24/6
90 CRI—CEC/T20													
S8553*	4G16/LED/CL/927/120V/E12	4	G16 1/2	E12	120	Clear	2700K	350	90	3 3⁄16	15K	045923085536	24/6
S11364*	4.5G16/LED/SW/927/120V/E12	4.5	G16 1/2	E12	120	Soft White	2700K	360	90	3 1⁄4	15K	045923113642	24/6
S11363*	4.5G16/LED/CL/930/120V/E12	4.5	G16 1/2	E12	120	Clear	3000K	360	90	3 1⁄4	15K	045923113635	24/6

Product sheet SA1980

**See warranty for details.

LED filament lamps
Globes - G25



S21737, S21739
G25 Clear



S29563, S9893, S8849, S12106, S9564, S12110
Clear G25



S9827, S12107, S12108, S12109, S21738, S21740
White G25



S9828
G25



360° BEAM | DIMMABLE | ** ENCLOSED FIXTURE | DAMP LOCATION | c UL us LISTED | * ENERGY STAR

LED Globe Filament Lamps - G25

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
40 Watt Replacement													
S12107	4G25/SW/LED/E26/3K/120V	4	G25	E26	120	Soft White	3000K	350	80	4 ½	15K	045923121074	24/6
S29563*	4.5G25/CL/LED/E26/27K/120V	4.5	G25	E26	120	Clear	2700K	450	80	4 ⅜	20K	045923295638	24/6
S9893*	4.5G25/CL/LED/E26/30K/120V	4.5	G25	E26	120	Clear	3000K	450	80	4 ⅜	15K	045923098932	24/6
S8849*	4.5G25/CL/LED/E26/40K/120V	4.5	G25	E26	120	Clear	4000K	450	80	4 ⅜	15K	045923088490	24/6
S12106	4.5G25/CL/LED/E26/5K/120V	4.5	G25	E26	120	Clear	5000K	450	80	4 ½	15K	045923121067	24/6
S9827*	4.5G25/SW/LED/E26/27K/120V	4.5	G25	E26	120	Soft White	2700K	430	80	4 ⅜	15K	045923098277	24/6
S9828†	4.5G25/SLV/LED/E26/27K/120V	4.5	G25	E26	120	Silver Crown	2700K	430	80	4 ⅜	15K	045923098284	24/6
60 Watt Replacement													
S9564*	6.5G25/CL/LED/E26/27K/120V	6.5	G25	E26	120	Clear	2700K	810	80	4 ⅜	15K	045923095641	24/6
S12110	6.5G25/CL/LED/E26/3K/120V	6.5	G25	E26	120	Clear	3000K	810	80	4 ½	15K	045923121104	24/6
S12108	6.5G25/SW/LED/E26/27K/120V	6.5	G25	E26	120	Soft White	2700K	650	80	4 ½	15K	045923121081	24/6
S12109	6.5G25/SW/LED/E26/3K/120V	6.5	G25	E26	120	Soft White	3000K	650	80	4 ½	15K	045923121098	24/6
Multi-Pks													
S21737*	4.5G25/LED/CL/27K/120V/2Pk	4.5	G25	E26	120	Clear	2700K	350	80	4 ½	15K	045923217371	12/2Pks
S21738*	4.5G25/LED/WH/27K/120V/2Pk	4.5	G25	E26	120	White	2700K	350	80	4 ½	15K	045923217388	12/2Pks
S21739*	5.5G25/LED/CL/27K/120V/2Pk	5.5	G25	E26	120	Clear	2700K	500	80	4 ½	15K	045923217395	12/2Pks
S21740*	5.5G25/LED/WH/27K/120V/2Pk	5.5	G25	E26	120	White	2700K	500	80	4 ½	15K	045923217401	12/2Pks
90 CRI—CEC/T20													
S29878*■	5.5G25/LED/927/CL/120V	5.5	G25	E26	120	Clear	2700K	500	90	4	15K	045923298783	24/6
S11365*■	5.5G25/LED/930/CL/120V	5.5	G25	E26	120	Clear	3000K	500	90	4	15K	045923113659	24/6
S11366*■	5.5G25/LED/930/SW/120V	5.5	G25	E26	120	Soft White	3000K	500	90	4	15K	045923113666	24/6

† Silver crown are 180° beam angle. ■ Also T24 compliant.

Product sheet SA1980

**See warranty for details.

LED filament lamps
Globes - G40

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures***
- c-UL-us listed
- CEC T20/T24 Available
- ENERGY STAR certified*
- 3 Year warranty



S12112, S12113
G40



S9565, S9566,
S12111
G40

LED Globe Filament Lamps - G40

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
40 Watt Replacement													
S9565	4.5G40/CL/LED/E26/27K/120V	4.5	G40	E26	120	Clear	2700K	450	80	6 ½	15K	045923095658	12
60 Watt Replacement													
S9566	6.5G40/CL/LED/E26/27K/120V	6.5	G40	E26	120	Clear	2700K	800	80	6 ½	15K	045923095665	12
S12111	6.5G40/CL/LED/E26/3K/120V	6.5	G40	E26	120	Clear	3000K	810	80	6 ½	15K	045923121111	12
S12112	6.5G40/SW/LED/E26/27K/120V	6.5	G40	E26	120	Soft White	2700K	650	80	6 ½	15K	045923121128	12
S12113	6.5G40/SW/LED/E26/3K/120V	6.5	G40	E26	120	Soft White	3000K	650	80	6 ½	15K	045923121135	12
90 CRI—CEC/T20													
S11367*■	8G40/LED/930/CL/120V	8	G40	E26	120	Clear	3000K	800	90	6 ⅞	15K	045923113673	12
S11368*■	8G40/LED/930/SW/120V	8	G40	E26	120	Soft White	3000K	800	90	6 ⅞	15K	045923113680	12

■ Also T24 compliant. JA8-2019

Product sheet SA1980

**See warranty for details.

LED filament lamps
Decorative - Candelabra base/torpedo



S29877, S29866, S29920, S29922, S29890, S8839, S9960, S9961, S21708, S21729
C11/B11



S9868
C11



S21708, S21729
B11



LED Decorative Filament Lamps - Candelabra Base - Torpedo Shape

360° BEAM | DIMMABLE | ** ENCLOSED FIXTURE | DAMP LOCATION | c UL us LISTED | * ENERGY STAR

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
25 Watt Replacement													
S29920*	2.5W CTC/LED/CL/27K/120V	2.5	C11	E12	120	Clear	2700K	200	80	3 ⅞	15K	045923299209	24/6
40 Watt Replacement													
S9868	3.5CTF/LED/FR/27K/120V	3.5	C11	E12	120	Frosted	2700K	350	80	4 5⁄16	15K	045923098680	24/6
S29922*	4W CTC/LED/27K/CL/120V	4	C11	E12	120	Clear	2700K	350	80	3 ⅞	15K	045923299223	24/6
S29890*	4W CTC/LED/30K/CL/120V	4	C11	E12	120	Clear	3000K	350	80	3 ⅞	15K	045923298905	24/6
S8839	4W CTC/LED/40K/CL/120V	4	C11	E12	120	Clear	4000K	350	80	3 ⅞	15K	045923088391	24/6
S29866*	4W CTC/LED/50K/CL/120V	4	C11	E12	120	Clear	5000K	350	80	4 5⁄16	15K	045923298660	24/6
60 Watt Replacement													
S9960*	5.5W CTC/LED/27K/CL/120V	5.5	C11	E12	120	Clear	2700K	500	80	3 ⅞	15K	045923099601	24/6
S9961*	5.5W CTC/LED/30K/CL/120V	5.5	C11	E12	120	Clear	3000K	500	80	3 ⅞	15K	045923099618	24/6
S9964*	5.5W ETC/LED/27K/CL/120V	5.5	C11	E26	120	Clear	2700K	500	80	3 ½	15K	045923099649	24/6
Multi-Pks													
S21708*	4.5W CTC/LED/27K/CL/120V/3Pk	4.5	B11	E12	120	Clear	2700K	350	80	3 ⅞	15K	045923217081	12/3Pks
S21729*	4.5W CTC/LED/3K/CL/120V/3Pk	4.5	B11	E12	120	Clear	3000K	350	80	3 ⅞	15K	045923217296	12/3Pks
90 CRI—CEC/T20 - 40 Watt Replacement													
S29877*■	4.5WCTC/LED/927/120/E12	4.5	B11	E12	120	Clear	2700K	350	90	3 ¾	15K	045923298776	24/6
S11369*	4.5CTF/LED/927/120V/E12	4.5	B11	E12	120	Frosted	2700K	360	90	3 ¾	15K	045923113697	24/6
S11370*	4.5CTC/LED/930/120V/E12	4.5	B11	E12	120	Clear	3000K	360	90	3 ¾	15K	045923113703	24/6
90 CRI—CEC/T20 - 60 Watt Replacement													
S11371*	5.5CTC/LED/927/120V/E12	5.5	B11	E12	120	Clear	2700K	500	90	3 ¾	15K	045923113710	24/6
S11373*	5.5CTF/LED/927/120V/E12	5.5	B11	E12	120	Frosted	2700K	500	90	3 ¾	15K	045923113734	24/6
S11372*	5.5CTC/LED/930/120V/E12	5.5	B11	E12	120	Clear	3000K	500	90	3 ¾	15K	045923113727	24/6

■ Also T24 compliant. JA8-2019

Product sheet SA1980

**See warranty for details.

LED filament lamps
Decorative - Medium base/torpedo

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures***
- c-UL-us listed
- CEC T20/T24 Available
- ENERGY STAR certified*
- 3 Year warranty



C11/B11



LED Decorative Filament Lamps - Medium Base - Torpedo Shape

360° BEAM · DIMMABLE · ** ENCLOSED FIXTURE · DAMP LOCATION · c UL us LISTED · * ENERGY STAR

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
25 Watt Replacement													
S9567*	2.5W ETC/LED/27K/120V	2.5	C11	E26	120	Clear	2700K	250	80	3 ½	25K	045923095672	24/6
40 Watt Replacement													
S9569*	4.5W ETC/LED/27K/120V	4.5	C11	E26	120	Clear	2700K	450	80	3 ½	15K	045923095696	24/6
60 Watt Replacement													
S9964*	5.5W ETC/LED/27K/CL/120V	5.5	C11	E26	120	Clear	2700K	500	80	3 ½	15K	045923099649	24/6
Multi-Pks													
S21709	4.5W ETC/LED/27K/CL/120V/3Pk	4.5	B11	E26	120	Clear	2700K	350	80	3 ⅞	15K	045923217098	12/3Pks
90 CRI—CEC/T20													
S8551*	4WETC/LED/927/CL/120V	4	B11	E26	120	Clear	2700K	350	90	3 ½	15K	045923085512	24/6
S11375*■	4.3ETF/LED/927/120V/E26	4.3	B11	E26	120	Frosted	2700K	350	90	3 ¾	15K	045923113758	24/6
S11374*■	4.3ETC/LED/930/120V/E26	4.3	B11	E26	120	Clear	3000K	350	90	3 ¾	15K	045923113741	24/6

■ Also T24 compliant. JA8-2019

Product sheet SA1980

**See warranty for details.

LED filament lamps
Decorative - Flame tip



S29867, S29921, S29923, S29891
S8840, S9962, S9963, S8552
CA11



S9869
CA11

LED Decorative Filament Lamps - Candelabra Base - Flame Tip

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
25 Watt Replacement													
S29921*	2.5W CFC/LED/CL/27K/120V	2.5	CA11	E12	120	Clear	2700K	200	80	4 11/16	15K	045923299216	24/6
40 Watt Replacement													
S9869	3.5CFF/LED/FR/27K/120V	3.5	CA11	E12	120	Frosted	2700K	350	80	5	15K	045923098697	24/6
S29923*	4W CFC/LED/27K/CL/120V	4	CA11	E12	120	Clear	2700K	350	80	4 11/16	15K	045923299230	24/6
S29891*	4W CFC/LED/30K/CL/120V	4	CA11	E12	120	Clear	3000K	350	80	4 11/16	15K	045923298912	24/6
S8840*	4W CFC/LED/40K/CL/120V	4	CA11	E12	120	Clear	4000K	350	80	4 11/16	15K	045923088407	24/6
S29867*	4W CFC/LED/50K/CL/120V	4	CA11	E12	120	Clear	5000K	350	80	5	15K	045923298677	24/6
60 Watt Replacement													
S9962*	5.5W CFC/LED/27K/CL/120V	5.5	CA11	E12	120	Clear	2700K	500	80	4 11/16	15K	045923099625	24/6
S9963*	5.5W CFC/LED/30K/CL/120V	5.5	CA11	E12	120	Clear	3000K	500	80	4 11/16	15K	045923099632	24/6
90 CRI—CEC/T20													
S8552*	4.5CFC/LED/927/120/E12	4.5	CA11	E12	120	Clear	2700K	350	90	4 3/4	15K	045923085529	24/6
S11376*	4.5CFC/LED/930/120V/E12	4.5	CA11	E12	120	Clear	3000K	360	90	3 3/4	15K	045923113765	24/6
S11377*	4.5CFF/LED/930/120V/E12	4.5	CA11	E12	120	Frosted	3000K	360	90	3 3/4	15K	045923113772	24/6

Product sheet SA1980



S9571, S9965
CA11

LED Decorative Filament Lamps - Medium Base - Flame Tip

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
25 Watt Replacement													
S9571	2.5W EFC/LED/27K/120V	2.5	CA11	E26	120	Clear	2700K	250	80	4 5/16	15K	045923095719	24/6
60 Watt Replacement													
S9965*	5.5W EFC/LED/27K/CL/120V	5.5	CA11	E26	120	Clear	2700K	500	80	4 5/16	15K	045923099656	24/6

**See warranty for details.

LED filament lamps

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures***
- c-UL-us listed
- CEC T20/T24 Available
- ENERGY STAR certified*
- 3 Year warranty



S9807 **S14** Non-dimmable | S9872 **T6** | S9575, S9576 **BT15** | S9581, S9895, S8851 **ST19** | S9580, S9892, S8841 **T10** | S9582 **T9** | S8559 **BT15** | S8554 **ST19** | S8555 **T6** | S8556 **T10**

360° BEAM | DIMMABLE | ** ENCLOSED FIXTURE | DAMP LOCATION | c UL us LISTED | * ENERGY STAR

LED Specialty Filament Lamps

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9807†	1WS14/LED/CL/27K/120V/ND	1	S14	E26	120	Clear	2700K	100	80	1 ¾	15K	045923098079	24/12
S9872	2.5T6/LED/CL/27K/E12/120V	2.5	T6	E12	120	Clear	2700K	200	80	3 3/16	15K	045923098727	24/6
S9575	4.5BT15/CL/LED/E26/27K/120V	4.5	BT15	E26	120	Clear	2700K	450	80	4 ⅛	15K	045923095757	24/6
S9576	6.5BT15/CL/LED/E26/27K/120V	6.5	BT15	E26	120	Clear	2700K	800	80	4 ⅛	15K	045923095764	24/6
S9581	6.5ST19/CL/LED/E26/27K/120V	6.5	ST19	E26	120	Clear	2700K	810	80	5 ½	15K	045923095818	24/6
S9895	6.5ST19/CL/LED/E26/30K/120V	6.5	ST19	E26	120	Clear	3000K	810	80	5 ½	15K	045923098956	24/6
S8851	6.5ST19/CL/LED/E26/40K/120V	6.5	ST19	E26	120	Clear	4000K	810	80	5 ½	15K	045923088513	24/6
S9580	4.5T10/LED/E26/27K/120V	4.5	T10	E26	120	Clear	2700K	430	80	5	15K	045923095801	24/6
S9892	4.5T10/LED/E26/30K/120V	4.5	T10	E26	120	Clear	3000K	430	80	5	15K	045923098925	24/6
S8841	4.5T10/LED/E26/40K/120V	4.5	T10	E26	120	Clear	4000K	450	80	5	15K	045923088414	24/6
S9582	6.5T9/CL/LED/E26/27K/120V	6.5	T9	E26	120	Clear	2700K	800	80	12	15K	045923095825	24/6
BT15 90 CRI—CEC/T20													
S8559■	5.5BT15/LED/927/CL/120V	5.5	BT15	E26	120	Clear	2700K	500	90	3 5/8	15K	045923085598	24/6
S11378■	8BT15/LED/927/CL/120V	8	BT15	E26	120	Clear	2700K	800	90	4 ¼	15K	045923113789	24/6
S11379■	8BT15/LED/927/SW/120V	8	BT15	E26	120	Soft White	2700K	800	90	4 ¼	15K	045923113796	24/6
ST19 90 CRI—CEC/T20													
S8554*	5.5ST19/LED/927/CL/120V	5.5	ST19	E26	120	Clear	2700K	500	90	5 ½	15K	045923085543	24/6
S11382■	8ST19/LED/930/CL/120V	8	ST19	E26	120	Clear	3000K	800	90	4 7/8	15K	045923113826	24/6
Tubular 90 CRI—CEC/T20													
S8555*	2.5T6/LED/927/CL/E12	2.5	T6	E12	120	Clear	2700K	180	90	3 3/16	15K	045923085550	24/6
S8556	4T10/LED/E26/27K/120V	4	T10	E26	120	Clear	2700K	350	90	5	15K	045923085567	24/6
S11381■	4.3T10/LED/930/CL/120V	4.3	T10	E26	120	Clear	3000K	350	90	5 3/8	15K	045923113819	24/6
S11380■	8T9/LED/927/CL/120V	8	T9	E26	120	Clear	2700K	800	90	4 15/16	15K	045923113802	24/6

■ Also T24 compliant. JA8-2019. †Non-Dimmable

Product sheet SA1980

**See warranty for details.

LED filament lamps
Vintage style

- LED with a traditional incandescent look and feel
- Omni-directional light source
- Dimmable
- Damp location
- Approved for totally enclosed fixtures***
- c-UL-us listed
- CEC T20/T24 Available
- ENERGY STAR certified*
- 3 Year warranty



S9577, S9578, S9579 **ST19** | S9585 **ST19** | S9583 **A19** | S9584 **G25** | S9588 **T9** | S9873 **T6** | S9986 **C11/E12** | S9987 **CA11/E12**

Vintage Style LED Filament Lamps

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
ST19													
S9577	2.5ST19/AMB/LED/E26/2K/120V	2.5	ST19	E26	120	Amber	2000K	220	80	5 ⅜	15K	045923095771	24/6
S9578	4.5ST19/AMB/LED/E26/2K/120V	4.5	ST19	E26	120	Amber	2000K	380	80	5 ⅜	15K	045923095788	24/6
S9579	6.5ST19/AMB/LED/E26/2K/120V	6.5	ST19	E26	120	Amber	2000K	650	80	5 ⅜	15K	045923095795	24/6
S9585	4.5ST19LONG/AMB/LED/E26/2K/120V	4.5	ST19	E26	120	Amber	2000K	380	80	5 ½	15K	045923095856	24/6
A19													
S9583	4.5A19/AMB/LED/E26/2K/120V	4.5	A19	E26	120	Amber	2000K	380	80	4 ⅛	15K	045923095832	24/6
G25													
S9584	4.5G25/AMB/LED/E26/2K/120V	4.5	G25	E26	120	Amber	2000K	380	80	4 ⅜	15K	045923095849	24/6
T9													
S9588	6.5T9/AMB/LED/E26/2K/120V	6.5	T9	E26	120	Amber	2000K	620	80	12	15K	045923095887	24/6
T6													
S9873	2.5T6/AMB/LED/E12/2K/120V	2.5	T6	E12	120	Amber	2000K	150	80	3 3⁄16	15K	045923098734	24/6
C11													
S9986	3.5CTA/AMB/LED/2K/120V	3.5	C11	E12	120	Amber	2000K	300	80	4 5⁄16	15K	045923099861	24/6
CA11													
S9987	3.5CFA/AMB/LED/2K/120V	3.5	CA11	E12	120	Amber	2000K	300	80	5	15K	045923099878	24/6

**See warranty for details.

Product sheets SA1980

**See warranty for details.

LED filament lamps
Vintage style - spiral



S9967 **ST19** | S9966 **A19** | S9968 **G30** | S9969 **G40** | S9971 **T9** | S9970 **B10**

Vintage Style LED Spiral Filament Lamps

360° BEAM | DIMMABLE | ** ENCLOSED FIXTURE | DAMP LOCATION | c UL us LISTED

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	CRI	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
ST19													
S9967	4.5ST19/SPIRAL/LED/AMB/120V	4.5	ST19	E26	120	Amber	2000K	240	80	5 ¼	15K	045923099670	24/6
A19													
S9966	4.5A19/SPIRAL/LED/AMB/120V	4.5	A19	E26	120	Amber	2000K	220	80	4 1⁄16	15K	045923099663	24/6
G30													
S9968	4.5G30/SPIRAL/LED/AMB/120V	4.5	G30	E26	120	Amber	2000K	240	80	5 7⁄16	15K	045923099687	24/6
G40													
S9969	4.5G40/SPIRAL/LED/AMB/120V	4.5	G40	E26	120	Amber	2000K	240	80	6 ⅝	15K	045923099694	24/6
T9													
S9971	4.5T9/SPIRAL/LED/AMB/120V	4.5	T9	E26	120	Amber	2000K	240	80	7 3⁄16	15K	045923099717	24/6
B10													
S9970	2.3ETC/SPIRAL/LED/AMB/120V	2.3	B10	E26	120	Amber	2000K	90	80	3 ½	15K	045923099700	24/6

Product sheets SA1980

**See warranty for details.

Vintage style LED spiral filament lamps in HID envelopes

Classic, warm glow and ambiance on an impressive scale.

- Restaurants
- Hotels
- Retail
- Restoration projects
- Themed venues
- Uses only 4 Watts
- Impressive size and presence
- Perfect for pendant fixtures and hanging sockets
- Approved for totally enclosed fixtures**
- Unique LED spiral filament
- Omni-directional light source
- Dimmable
- Wet location
- 2150K
- T24, BT38, BT56 and PS52 shapes
- E26 base
- Long life—25,000 hours
- 3 Year warranty



S22430



S22431



S22432



S22433

Spiral Filament LED Lamps in HID Envelopes

360° BEAM | DIMMABLE | WET LOCATION | ** ENCLOSED FIXTURE | c UL us LISTED

Item Number	Lamp Description	W	V	Bulb Type	Base Type	CCT	Lm	Finish	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
S22430	4T24/LED/CLEAR/E26/VINTAGE/120V	4	120	T24	E26	2150K	200	Clear	13	25K	045923224300	12
S22431	4BT38/LED/CLEAR/E26/VINTAGE/120V	4	120	BT38	E26	2150K	200	Clear	16 ½	25K	045923224317	12
S22432	4BT56/LED/CLEAR/E26/VINTAGE/120V	4	120	BT56	E26	2150K	200	Clear	13 13⁄16	25K	045923224324	6
S22433	4PS52/LED/CLEAR/E26/VINTAGE/120V	4	120	PS52	E26	2150K	200	Clear	11 13⁄16	25K	045923224331	6

Product sheet SA1980

**See warranty for details.

LED filament lamps - Carded



A15 | A19 Clear | A19 White | B11 / C11 | CA10 / CA11



LED Filament Lamps

DIMMABLE | 360° BEAM | ** ENCLOSED FIXTURE | DAMP LOCATION | c UL us LISTED | * ENERGY STAR

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	Life/ Hrs.	UPC	Pack
A15											
S8615*	4.5A15/CL/LED/E26/27K/ES/120V/1CD	4.5	A15	E26	120	Clear	2700K	450	15K	045923086151	12/1 cd
S21710*	5.5A15/LED/2700K/E12/120V/2CD	5.5	A15	E12	120	Clear	2700K	450	15K	045923217104	12/2 cd
S21733*	5A15/LED/WH/27K/E26/120V/2CD	5	A15	E26	120	White	2700K	450	15K	045923217333	12/2 cd
S21711*	5.5A15/LED/2700K/E26/120V/2CD	5.5	A15	E26	120	Clear	2700K	450	15K	045923217111	12/2 cd
A19											
S8616*	7A19/CL/LED/E26/27K/ES/120V/1CD	7	A19	E26	120	Clear	2700K	800	15K	045923086168	12/1 cd
Decorative - Torpedo Shape - Candelabra Base											
S21700*	2.5W CTC/LED/27K/CL/120V/2CD	2.5	B11	E12	120	Clear	2700K	180	15K	045923217005	12/2 cd
S28613*	4WCTC/LED/27K/CL/120V/1CD	4	C11	E12	120	Clear	2700K	350	15K	045923286131	12/1 cd
S21702*	4.5W CTC/LED/27K/CL/120V/2CD	4.5	B11	E12	120	Clear	2700K	350	15K	045923217029	12/2 cd
S21704*	4.5W CTF/LED/27K/FR/120V/2CD	4.5	B11	E12	120	Frosted	2700K	330	15K	045923217043	12/2 cd
S21728*	4.5W CTC/LED/5K/CL/120V/2CD	4.5	B11	E12	120	Clear	5000K	350	15K	045923217289	12/2 cd
S21706	5.5W CTC/LED/27K/CL/120V/2CD	5.5	B11	E12	120	Clear	2700K	500	15K	045923217067	12/2 cd
Decorative - Torpedo Shape - Medium Base											
S21701*	2.5W ETC/LED/27K/CL/120V/2CD	2.5	B11	E26	120	Clear	2700K	180	15K	045923217012	12/2 cd
S21703*	4.5W ETC/LED/27K/CL/120V/2CD	4.5	B11	E26	120	Clear	2700K	350	15K	045923217036	12/2 cd
S8609*	4.5WETC/LED/27K/120V/1CD	4.5	C11	E26	120	Clear	2700K	450	15K	045923086090	12/1 cd
S21705*	4.5W ETF/LED/27K/FR/120V/2CD	4.5	B11	E26	120	Frosted	2700K	330	15K	045923217050	12/2 cd
S21730*	4.5W ETC/LED/5K/CL/120V/2CD	4.5	B11	E26	120	Clear	5000K	350	15K	045923217302	12/2 cd
S21707*	5.5W ETC/LED/27K/CL/120V/2CD	5.5	B11	E26	120	Clear	2700K	500	15K	045923217074	12/2 cd

Product sheets SA2607

**See warranty for details.

LED filament lamps - Carded



G16½



ST19





LED Filament Lamps

DIMMABLE · 360° BEAM · ** ENCLOSED FIXTURE · DAMP LOCATION · c UL us LISTED · * ENERGY STAR

Item Number	Lamp Description	W	Bulb Type	Base	V	Finish	CCT	Lm	Life/ Hrs.	UPC	Pack
Decorative - Flame Tip - Candelabra Base											
S21720*	2.5W CFC/LED/27K/CL/120V/2CD	2.5	CA10	E12	120	Clear	2700K	180	15K	045923217203	12/2 cd
S28614*	4WCFC/LED/27K/CL/120V /1CD	4	CA11	E12	120	Clear	2700K	350	15K	045923286148	12/1 cd
S21721*	4.5W CFC/LED/27K/CL/120V/2CD	4.5	CA10	E12	120	Clear	2700K	350	15K	045923217210	12/2 cd
S21732*	4.5W CFF/LED/27K/FR/120V/2CD	4.5	CA10	E12	120	Frost	2700K	350	15K	045923217326	12/2 cd
S21722*	4.5W CFC/LED/5K/CL/120V/2CD	4.5	CA10	E12	120	Clear	5000K	350	15K	045923217227	12/2 cd
S21723*	5.5W CFC/LED/27K/CL/120V/2CD	5.5	CA10	E12	120	Clear	2700K	500	15K	045923217234	12/2 cd
Decorative - Flame Tip - Medium Base											
S21724*	2.5W EFC/LED/27K/CL/120V/2CD	2.5	CA10	E26	120	Clear	2700K	180	15K	045923217241	12/2 cd
S21725*	4.5W EFC/LED/27K/CL/120V/2CD	4.5	CA10	E26	120	Clear	2700K	350	15K	045923217258	12/2 cd
S21731*	4.5W EFF/LED/27K/FR/120V/2CD	4.5	CA10	E26	120	Frost	2700K	350	15K	045923217319	12/2 cd
S21726*	4.5W EFC/LED/5K/CL/120V/2CD	4.5	CA10	E26	120	Clear	5000K	350	15K	045923217265	12/2 cd
S8610*	4.5WEFC/LED/27K/120V/1CD	4.5	CA11	E26	120	Clear	2700K	450	15K	045923086106	12/1 cd
S21727*	5.5W EFC/LED/27K/CL/120V/2CD	5.5	CA10	E26	120	Clear	2700K	500	15K	045923217272	12/2 cd
G16											
S21735*	4.5G16/LED/CL/27K/E12/120V/2CD	4.5	G16½	E12	120	Clear	2700K	350	15K	045923217357	12/2 cd
S21736*	5.5G16/LED/CL/27K/E12/120V/2CD	5.5	G16½	E12	120	Clear	2700K	500	15K	045923217364	12/2 cd
ST19											
S8612	4.5ST19/AMB/LED/E26/2K/120V/1CD	4.5	ST19	E26	120	Amber	2000K	380	15K	045923086120	12/1 cd
S8611	6.5ST19/CL/LED/E26/27K/120V/1CD	6.5	ST19	E26	120	Clear	2700K	810	15K	045923086113	12/1 cd

Product sheets SA2607

**See warranty for details.

Satco-Escent LED lamps

Elegance and efficiency in one package.

The most "decorative" decorative LED on the market. Adds elegance and style to any fixture even when not illuminated.

Features

- 2 Watt LED direct replacement for 25 watt incandescent lamps
- 4 Watt LED direct replacement for 40 watt incandescent lamps
- Unique satin-spun white or amber finish
- Dimmable
- Carded versions for peg board merchandising
- LED filament technology
- Approved for totally enclosed fixtures**
- Long life—15,000 hours
- 3 Year warranty





S23407, S22707 | S11301, S11303, S11305, S11307 | S23412, S22712 | S23403, S22703 | S11300, S11302, S11304, S11306 | S23413, S22713

Amber Finish | Satin Finish

Satco-escent LED lamps

DIMMABLE | DAMP LOCATION | ** ENCLOSED FIXTURE | c UL us LISTED

Item No.	Description	W	Voltage	Base Type	Finish	CCT	Lm	CRI	Life/ Hrs.	UPC	Case Pack
Boxed											
S11300	2CA11/LED/SA/E12/27K/120V	2	120V	E12	Satin Spun	2700K	150	80	15K	045923113000	24
S11301	2CA11/LED/A/E12/21K/120V	2	120V	E12	Amber Spun	2100K	100	80	15K	045923113017	24
S11302	4CA11/LED/SA/E12/27K/120V	4	120V	E12	Satin Spun	2700K	300	80	15K	045923113024	24
S11303	4CA11/LED/A/E12/21K/120V	4	120V	E12	Amber Spun	2100K	200	80	15K	045923113031	24
S23403	2C11/LED/SA/E26/27K/120V	2	120V	E26	Satin Spun	2700K	120	80	15K	045923234033	24
S23407	2C11/LED/A/E26/23K/120V	2	120V	E26	Amber Spun	2100K	100	80	15K	045923234071	24
S23413	4C15/LED/SA/E26/27K/120V	4	120V	E26	Satin Spun	2700K	300	80	15K	045923234132	24
S23412	4C15/LED/A/E26/23K/120V	4	120V	E26	Amber Spun	2100K	240	80	15K	045923234125	24
Carded											
S11304	2CA11/LED/SA/E12/27K/120V/CD	2	120V	E12	Satin Spun	2700K	150	80	15K	045923113048	24
S11305	2CA11/LED/A/E12/21K/120V/CD	2	120V	E12	Amber Spun	2100K	100	80	15K	045923113055	24
S11306	4CA11/LED/SA/E12/27K/120V/CD	4	120V	E12	Satin Spun	2700K	300	80	15K	045923113062	24
S11307	4CA11/LED/A/E12/21K/120V/CD	4	120V	E12	Amber Spun	2100K	200	80	15K	045923113079	24
S22703	2C11/LED/SA/E26/27K/120V/CD	2	120V	E26	Satin Spun	2700K	120	80	15K	045923227035	24
S22707	2C11/LED/A/E26/23K/120V/CD	2	120V	E26	Amber Spun	2100K	100	80	15K	045923227073	24
S22713	4C15/LED/SA/E26/27K/120V/CD	4	120V	E26	Satin Spun	2700K	300	80	15K	045923227134	24
S22712	4C15/LED/A/E26/23K/120V/CD	4	120V	E26	Amber Spun	2100K	240	80	15K	045923227127	24

Product sheets SA2320

**See warranty for details.

Carded LED specialty lamps

- Sign bulbs
- Indicator
- Nightlights
- Decorative lamps
- Non-dimmable
- Direct replacements for incandescent & specialty lamps
- LED replacements use 80% less energy
- Wet location
- Long life—25,000 hours
- 3 Year warranty





WET LOCATION

c UL us LISTED

Carded Specialty LED Lamps

Item Number	Lamp Description	W	Base	V	Finish	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Cards
S9150	1.4W A15/CL/LED/120V/CD	1.4	Med.	120	Clear	2700K	36	3 15/16	25K	045923091506	12/1
S9151	1.4W A15/FR/LED/120V/CD	1.4	Med.	120	Frost	2700K	45	3 15/16	25K	045923091513	12/1
S9152	1W CTC/LED/120V/CD	1.0	Cand.	120	Clear	2700K	25	3 9/16	25K	045923091520	12/1
S9153	1W CFC/LED/120V/CD	1.0	Cand.	120	Clear	2700K	25	3 7/8	25K	045923091537	12/1
S9154	1.4W ETC/LED/120V/CD	1.4	Med.	120	Clear	2700K	36	3 13/16	25K	045923091544	12/1
S9155	1W CTD/LED/CRYSTAL/120V/CD	1.0	Cand.	120	Clear	2700K	25	3 9/16	25K	045923091551	12/1
S9156	0.5W C7/CL/LED/120V/CD	0.5	Cand.	120	Clear	2700K	14	2 1/16	25K	045923091568	12/1
S9157	0.5W C7/WH/LED/120V/CD	0.5	Cand.	120	White	2700K	14	2 1/16	25K	045923091575	12/1
S9158	1.4W G16.5/CL/LED/120V/CD	1.4	Med.	120	Clear	2700K	36	2 3/4	25K	045923091582	12/1
S9159	1.4W G16.5/WH/LED/120V/CD	1.4	Med.	120	White	2700K	45	2 13/16	25K	045923091599	12/1
S9160	1.2W S11/CL/LED/120V/CD	1.2	Med.	120	Clear	2700K	32	2 5/16	25K	045923091605	12/1
S9161	1.2W S11/WH/LED/120V/CD	1.2	Med.	120	White	2700K	40	2 5/16	25K	045923091612	12/1
S9162	1.2W S11/BL/LED/120V/CD	1.2	Med.	120	Blue	—	—	2 5/16	25K	045923091629	12/1
S9163	1.2W S11/GR/LED/120V/CD	1.2	Med.	120	Green	—	—	2 5/16	25K	045923091636	12/1
S9164	1.2W S11/OR/LED/120V/CD	1.2	Med.	120	Orange	—	—	2 5/16	25K	045923091643	12/1
S9165	1.2W S11/RED/LED/120V/CD	1.2	Med.	120	Red	—	—	2 5/16	25K	045923091650	12/1
S9166	1.2W S11/Y/LED/120V/CD	1.2	Med.	120	Yellow	—	—	2 5/16	25K	045923091667	12/1
S9167	1.0W S11/CL/LED/E17/120V/CD	1.0	Inter.	120	Clear	2700K	28	2 5/16	25K	045923091674	12/1
S9168	1.0W S11/WH/LED/E17/120V/CD	1.0	Inter.	120	White	2700K	35	2 5/16	25K	045923091681	12/1
S9169	1.4W S14/Y/LED/120V/CD	1.4	Med.	120	Yellow	—	—	3 5/16	25K	045923091698	12/1
S9170	1.4W S14/RED/LED/120V/CD	1.4	Med.	120	Red	—	—	3 5/16	25K	045923091704	12/1
S9171	1.4W S14/GR/LED/120V/CD	1.4	Med.	120	Green	—	—	3 5/16	25K	045923091711	12/1
S9172	1.4W S14/BL/LED/120V/CD	1.4	Med.	120	Blue	—	—	3 5/16	25K	045923091728	12/1
S9173	1.4W S14/OR/LED/120V/CD	1.4	Med.	120	Orange	—	—	3 5/16	25K	045923091735	12/1
S9174	1.4W S14/CL/LED/120V/CD	1.4	Med.	120	Clear	2700K	36	3 5/16	25K	045923091742	12/1
S9175	1.4W S14/FR/LED/120V/CD	1.4	Med.	120	Frost	2700K	45	3 5/16	25K	045923091759	12/1
S9176	0.8W T6/FR/LED/120V/CD	0.8	Cand.	120	Frost	2700K	25	2 1/16	25K	045923091766	12/1
S9177	0.8W T6/CL/LED/120V/CD	0.8	Cand.	120	Clear	2700K	20	2 1/16	25K	045923091773	12/1

Product sheet SA1529


See warranty for details.

40W replacement LED A19 lamps

- Direct replacement for 40 Watt incandescent lamps, uses only 5.5-6 Watts
- Indoor residential and commercial lighting
- Innovative design–smooth heat sink design to resemble traditional incandescent lamp
- 2700K, 3000K, 3500K, 4000K & 5000K options
- Damp location
- Dimmable and non-dimmable options
- Approved for totally enclosed fixtures**
- Long life—up to 25,000 hours
- ENERGY STAR certified*
- 3 Year warranty—10,000-15,000 hours
- 5 Year warranty—25,000 hours



Beam Profile



Beam Angle: 220°

40W Replacement A19 LED Lamps

DIMMABLE ** ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
Dimmable											
S29830*	6A19/OMNI/220/LED/27K	6	120	80	2700K	480	220°	4 5⁄16	25K	045923298301	24/6
S29831*	6A19/OMNI/220/LED/30K	6	120	80	3000K	480	220°	4 5⁄16	25K	045923298318	24/6
S29832*	6A19/OMNI/220/LED/35K	6	120	80	3500K	480	220°	4 5⁄16	25K	045923298325	24/6
S29833*	6A19/OMNI/220/LED/40K	6	120	80	4000K	480	220°	4 5⁄16	25K	045923298332	24/6
S29834*	6A19/OMNI/220/LED/50K	6	120	80	5000K	480	220°	4 5⁄16	25K	045923298349	24/6
Non-Dimmable											
S11402	5.8A19/LED/27K/120V/ECO/ND	5.8	120	80	2700K	450	220°	4 5⁄16	10K	045923114021	24/6
S11403	5.8A19/LED/30K/120V/ECO/ND	5.8	120	80	3000K	450	220°	4 5⁄16	10K	045923114038	24/6
S11404	5.8A19/LED/40K/120V/ECO/ND	5.8	120	80	4000K	450	220°	4 5⁄16	10K	045923114045	24/6
S11405	5.8A19/LED/50K/120V/ECO/ND	5.8	120	80	5000K	450	220°	4 5⁄16	10K	045923114052	24/6
S9590*	6A19/LED/2700K/120V	6	120	80	2700K	480	220°	4 5⁄16	15K	045923095900	24/6
S9591*	6A19/LED/3000K/120V	6	120	80	3000K	480	220°	4 5⁄16	15K	045923095917	24/6
S9592*	6A19/LED/5000K/120V	6	120	80	5000K	480	220°	4 5⁄16	15K	045923095924	24/6
90 CRI—CEC/T20 - Non-Dimmable											
S11320†■	5.5A19/LED/927/120V/D	5.5	120	90	2700K	450	220°	4 3⁄16	25K	045923113208	24/6
S11321†■	5.5A19/LED/930/120V/D	5.5	120	90	3000K	450	220°	4 3⁄16	25K	045923113215	24/6
S28557	5.5A19/LED/927/120V/ND/4Pk	5.5	120	90	2700K	450	220°	4 3⁄16	15K	045923285578	12-4Pks
S28558	5.5A19/LED/930/120V/ND/4Pk	5.5	120	90	3000K	450	220°	4 3⁄16	15K	045923285585	12-4Pks
S28593	5.5A19/LED/940/120V/ND/4Pk	5.5	120	90	4000K	450	220°	4 3⁄16	15K	045923285936	12-4Pks
S28594	5.5A19/LED/950/120V/ND/4Pk	5.5	120	90	5000K	450	220°	4 3⁄16	15K	045923285943	12-4Pks

4-Pks Must be ordered in full cases only.

Product sheet SA2648


**See warranty for details.

60W replacement LED A19 lamps

- Direct replacement for 60 Watt incandescent lamps, uses only 8.5-10 Watts
- Indoor residential and commercial lighting
- Innovative design–smooth heat sink design to resemble traditional incandescent lamp
- 2700K, 3000K, 3500K, 4000K & 5000K options
- Damp location
- Dimmable and non-dimmable options
- Approved for totally enclosed fixtures**
- E26 & GU24 base options
- CEC/T20 Compliant options available
- Long life—up to 25,000 hours
- ENERGY STAR certified*
- 3 Year warranty—10,000-15,000 hours
- 5 Year warranty—25,000 hours



Beam Profile



Beam Angle: 220°

DIMMABLE ** ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

60W Replacement A19 LED Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
Dimmable											
S29835*	9.8A19/OMNI/220/LED/27K	9.8	120	80	2700K	800	220°	4 5/16	25K	045923298356	24/6
S29836*	9.8A19/OMNI/220/LED/30K	9.8	120	80	3000K	800	220°	4 5/16	25K	045923298363	24/6
S29837*	9.8A19/OMNI/220/LED/35K	9.8	120	80	3500K	800	220°	4 5/16	25K	045923298370	24/6
S29838*	9.8A19/OMNI/220/LED/40K	9.8	120	80	4000K	800	220°	4 5/16	25K	045923298387	24/6
S29839*	9.8A19/OMNI/220/LED/50K	9.8	120	80	5000K	800	220°	4 5/16	25K	045923298394	24/6
S29840*	9.8A19/OMNI/220/LED/27K/GU24	9.8	120	80	2700K	800	220°	4 5/16	25K	045923298400	24/6
S29844*	9.8A19/OMNI/220/LED/30K/GU24	9.8	120	80	3000K	800	220°	4 5/16	25K	045923298448	24/6
S29841*	9.8A19/OMNI/220/LED/35K/GU24	9.8	120	80	3500K	800	220°	4 5/16	25K	045923298417	24/6
S29842*	9.8A19/OMNI/220/LED/40K/GU24	9.8	120	80	4000K	800	220°	4 5/16	25K	045923298424	24/6
S29843	9.8A19/OMNI/220/LED/50K/GU24	9.8	120	80	5000K	800	220°	4 5/16	25K	045923298431	24/6
Non-Dimmable											
S9593*	9.5A19/LED/2700K/120V	9.5	120	80	2700K	800	220°	4 5/16	15K	045923095931	24/6
S9594*	9.5A19/LED/3000K/120V	9.5	120	80	3000K	800	220°	4 5/16	15K	045923095948	24/6
S9595*	9.5A19/LED/5000K/120V	9.5	120	80	5000K	800	220°	4 5/16	15K	045923095955	24/6
S11406	9.8A19/LED/27K/120V/ECO/ND	9.8	120	80	2700K	800	220°	4 5/16	10K	045923114069	24/6
S11407	9.8A19/LED/30K/120V/ECO/ND	9.8	120	80	3000K	800	220°	4 5/16	10K	045923114076	24/6
S11408	9.8A19/LED/40K/120V/ECO/ND	9.8	120	80	4000K	800	220°	4 5/16	10K	045923114083	24/6
S11409	9.8A19/LED/50K/120V/ECO/ND	9.8	120	80	5000K	800	220°	4 5/16	10K	045923114090	24/6
120-277V Range Voltage - Non-Dimmable											
S8914*	8.5A19/LED/27K /120-277V	8.5	120-277	80	2700K	800	220°	4 5/16	25K	045923089145	24/6
S8915*	8.5A19/LED/30K /120-277V	8.5	120-277	80	3000K	800	220°	4 5/16	25K	045923089152	24/6
S8916	8.5A19/LED/40K /120-277V	8.5	120-277	80	4000K	800	220°	4 5/16	25K	045923089169	24/6
S8920	8.5A19/LED/50K /120-277V	8.5	120-277	80	5000K	800	220°	4 5/16	25K	045923089206	24/6


Product sheet SA2631

**See warranty for details.

60W replacement LED A19 lamps



Beam Profile



Beam Angle: 220°

DIMMABLE ** ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

60W Replacement A19 LED Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
90 CRI—CEC/T20—JA8-2016											
S9703*■	10A19/OMNI/LED/27K/90CRI	10	120	90	2700K	800	220°	4 5⁄16	25K	045923097034	24/6
S9704*■	10A19/OMNI/LED/30K/90CRI	10	120	90	3000K	800	220°	4 5⁄16	25K	045923097041	24/6
S8480	10A19/OMNI/LED/40K/90CRI	10	120	90	4000K	800	220°	4 5⁄16	25K	045923084805	24/6
S8481	10A19/OMNI/LED/50K/90CRI	10	120	90	5000K	800	220°	4 5⁄16	25K	045923084812	24/6
S9707*■	10A19/OMNI/LED/27K/90CRI/GU24	10	120	90	2700K	800	220°	4 5⁄16	25K	045923097072	24/6
S9708*■	10A19/OMNI/LED/30K/90CRI/GU24	10	120	90	3000K	800	220°	4 5⁄16	25K	045923097089	24/6
S8482	10A19/OMNI/LED/40K/90CRI/GU24	10	120	90	4000K	800	220°	4 5⁄16	25K	045923084829	24/6

■ Also T24 compliant.


Product sheet SA2267

Low voltage 9 Watt LED A19 lamps

- 60 Watt incandescent replacement, uses only 9 Watts
- RVs and campers
- Marine applications
- High efficiency—reduces drain on battery
- 12-34V DC
- 800 Lumens
- Long life—25,000 hours
- 3 Year warranty



Beam Profile



Beam Angle: 220°

** ENCLOSED FIXTURE DAMP LOCATION 800 LUMENS 25,000 HOURS

Low Voltage 9 Watt LED A19 Lamps

Item Number	Lamp Description	W	VDC	Base Type	CCT	CRI	M.O.L. (Inches)	Lm	Life/ Hrs.	UPC	Pack/ Master
S15011	9A19/LED/12-34VDC/827	9	12-34	E26	2700K	80	4 3⁄8	800	25K	045923150111	24/6
S15012	9A19/LED/12-34VDC/850	9	12-34	E26	5000K	80	4 3⁄8	800	25K	045923150128	24/6

Product sheet SA2476

**See warranty for details.


60W replacement LED A19 4-Pks

- Direct replacement for 60 Watt replacement incandescent lamps, uses only 9.5-10 Watts
- Indoor residential and commercial lighting
- Direct replacement for 13 Watt screw-in CFLs
- 2700K, 3000K, 4000K and 5000K options
- Damp location
- Approved for totally enclosed fixtures**
- Long life—15,000 hours
- ENERGY STAR certified*
- 3 Year warranty





Beam Profile



Beam Angle: 220°

60W Replacement A19 LED Lamps 4-Pks

† DIMMABLE ** ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
Dimmable											
S11414†	9.5A19/LED/827/120V/D/4Pack	9.5	120	80	2700K	800	230°	4 3⁄16	15K	045923114144	12 - 4Pks
S11415†	9.5A19/LED/830/120V/D/4Pack	9.5	120	80	3000K	800	230°	4 3⁄16	15K	045923114151	12 - 4Pks
S11416†	9.5A19/LED/840/120V/D/4Pack	9.5	120	80	4000K	800	230°	4 3⁄16	15K	045923114168	12 - 4Pks
S11417†	9.5A19/LED/850/120V/D/4Pack	9.5	120	80	5000K	800	230°	4 3⁄16	15K	045923114175	12 - 4Pks
Non-Dimmable											
S29596*	9.5A19/LED/27K/ND/120V/4Pack	9.5	120	80	2700K	800	220°	4 5⁄16	15K	045923295966	12 - 4Pks
S29589*	9.5A19/LED/30K/ND/120V/4Pack	9.5	120	80	3000K	800	220°	4 5⁄16	15K	045923295898	12 - 4Pks
S29558*	9.5A19/LED/40K/ND/120V/4Pack	9.5	120	80	4000K	800	220°	4 5⁄16	15K	045923295584	12 - 4Pks
S29597*	9.5A19/LED/50K/ND/120V/4Pack	9.5	120	80	5000K	800	220°	4 5⁄16	15K	045923295973	12 - 4Pks
90 CRI—CEC/T20 Non-Dimmable											
S28560	10A19/LED/927/120V/ND/4Pack	10	120	90	2700K	750	220°	4 3⁄16	15K	045923285608	12-4Pks
S28561	10A19/LED/930/120V/ND/4Pack	10	120	90	3000K	750	220°	4 3⁄16	15K	045923285615	12-4Pks
S28562	10A19/LED/940/120V/ND/4Pack	10	120	90	4000K	750	220°	4 3⁄16	15K	045923285622	12-4Pks
S28563	10A19/LED/950/120V/ND/4Pack	10	120	90	5000K	750	220°	4 3⁄16	15K	045923285639	12-4Pks

Must be ordered in full cases only.

Product sheet SA2659

**See warranty for details.

60W replacement LED A19 display pack

- Direct replacement for 60 Watt incandescent lamps, uses only 9.5 Watts
- Indoor residential and commercial lighting
- Warm white 2700K
- Damp location
- Approved for totally enclosed fixtures**
- Long life—25,000 hours
- ENERGY STAR certified*
- 3 Year warranty







Sold 72 per display

9.5 Watt 240˚ LED A19 Display Pks

DIMMABLE ** ENCLOSED FIXTURE DAMP LOCATION c UL US LISTED * ENERGY STAR

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
Dimmable											
S29629*	9.5A19/LED/2700K/800L/120V/D	9.5	120	80	2700K	800	240°	4 ⅜	25K	045923096297	72
Must be ordered in full cases only.											

Product sheet SA1994

60W replacement LED A19 lamp 2-pack display

Great efficiency, even greater value – now in convenient 2-Pks

- Indoor residential and commercial lighting
- Great for retail end caps and counter areas
- 60 Watt replacement uses only 9.8 Watts
- Innovative design–smooth heat sink design to resemble traditional incandescent lamp
- 2700K
- Damp location
- Approved for totally enclosed fixtures**
- Long life—25,000 hours
- ENERGY STAR certified*
- 5 Year warranty







Sold 60 2-Pks per display

60W Replacement A19 LED Lamp 2-Pks

DIMMABLE ** ENCLOSED FIXTURE DAMP LOCATION c UL US LISTED * ENERGY STAR

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
Dimmable											
S29699*	9.8A19/LED/2700K/800L/2Pack	9.8	120	80+	2700K	800	220°	4 3/16	25K	045923096990	60-2Pks
Must be ordered in full cases only.											

Product sheet SA2043


**See warranty for details.

60W replacement LED A19 10-Pks

- Direct replacements for 60W incandescent lamps
- Value–packed for retail or contractor sales
- 60 Watt replacement uses only 9 Watts
- Direct replacement for 13 Watt screw-in CFLs
- Indoor residential and commercial lighting
- 3000K, and 5000K options
- Damp location
- Approved for totally enclosed fixtures**
- Long life—10,000 hours
- 3 Year warranty



Beam Profile



Beam Angle: 220°



** ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED

60W Replacement A19 LED A19 10 - Pack

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC
S11400	9A19/LED/E26/3K/120V/10Pack	9	120	80	3000K	800	220°	4 3/8	10K	045923114007
S11401	9A19/LED/E26/5K/120V/10Pack	9	120	80	5000K	800	220°	4 3/8	10K	045923114014
90 CRI—CEC/T20										
S11410	9.5A19/LED/930/120V/90CRI/10Pk	9.5	120	90	3000K	760	220°	4 3/8	10K	045923114106
S11411	9.5A19/LED/950/120V/90CRI/10Pk	9.5	120	90	5000K	760	220°	4 3/8	10K	045923114113

Master Cases 4/10 Pks

100pc Contractor pack

- Direct replacement for 60 Watt incandescent lamps or 13 Watt CFL, uses only 9 Watts 100 Per carton for easier installation and storage
- Residential and commercial lighting
- 2700K & 4000K options
- Damp location
- Approved for totally enclosed fixtures**
- 10,000 Hours
- Non-dimmable
- 3 Year warranty*



4 Trays per Master Carton



** ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED

60W Replacement A19 LED Lamps - 100 Pack

Item Number	Lamp Description	W	V	Finish	CRI	Base Type	CCT	Lm	Bm	MOL	Life/ Hrs	UPC
S11412	9A19/LED/E26/827/120V/100Pk	9	120	Frosted	80	Medium	2700K	800	220°	4 3/8	10K	045923114120
S11413	9A19/LED/E26/840/120V/100Pk	9	120	Frosted	80	Medium	4000K	800	220°	4 3/8	10K	045923114137


**See warranty for details.

75W replacement LED A19 lamps

- Direct replacement for 75 Watt incandescent lamps, uses only 11-13 Watts
- Indoor residential and commercial lighting
- Damp Location
- Approved for totally enclosed fixtures**
- E26 & GU24 base options
- Dimmable and non-dimmable options
- CEC/T20 Compliant options available
- Long life—25,000 hours
- ENERGY STAR certified*
- 3 Year warranty—15,000 hours
- 5 Year warranty—25,000 hours



Beam Profile



Beam Angle: 220°

75W Replacement LED A19 Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
Dimmable											
S29810*	11A19/LED/2700K/1100L/120V/D	11	120	80	2700K	1100	220°	4 5⁄16	25K	045923298103	24/6
S29811*	11A19/LED/3000K/1100L/120V/D	11	120	80	3000K	1100	220°	4 5⁄16	25K	045923298110	24/6
S29812*	11A19/LED/4000K/1100L/120V/D	11	120	80	4000K	1100	220°	4 5⁄16	25K	045923298127	24/6
S29813*	11A19/LED/5000K/1100L/120V/D	11	120	80	5000K	1100	220°	4 5⁄16	25K	045923298134	24/6
S29814*	11A19/LED/2700K/120V/D/GU24	11	120	80	2700K	1100	220°	4 5⁄16	25K	045923298141	24/6
S29804*	11A19/LED/4000K/120V/D/GU24	11	120	80	4000K	1100	220°	4 5⁄16	25K	45923298042	24/6
90 CRI—CEC/T20											
S8650*■	13A19/LED/27K/90CRI	13	120	90	2700K	1100	220°	4 5⁄8	25K	045923086502	24/6
S8651*■	13A19/LED/30K/90CRI	13	120	90	3000K	1100	220°	4 5⁄8	25K	045923086519	24/6
S8483	13A19/LED/40K/90CRI	13	120	90	4000K	1100	220°	4 5⁄8	25K	045923084836	24/6
S8484	13A19/LED/50K/90CRI	13	120	90	5000K	1100	220°	4 5⁄8	25K	045923084843	24/6
S11323†■	13A19/LED/927/120V/D/2Pk	13	120	90	2700K	1100	220°	4 5⁄8	25K	045923113239	12-2Pks
S11324†■	13A19/LED/927/120V/D/GU24	13	120	90	2700K	1100	220°	4 ½	25K	045923084850	24/6
S11325†■	13A19/LED/930/120V/D/GU24	13	120	90	3000K	1100	220°	4 ½	25K	045923113253	24/6
S8485†■	13A19/LED/940/120V/D/GU24	13	120	90	4000K	1100	220°	4 ½	25K	045923084850	24/6
Non-Dimmable											
S28765*	11.5A19/LED/27K/ND/120V	11.5	120	80	2700K	1100	220°	4 5⁄16	15K	045923287657	24/6
S28766*	11.5A19/LED/30K/ND/120V	11.5	120	80	3000K	1100	220°	4 5⁄16	15K	045923287664	24/6
S28767*	11.5A19/LED/40K/ND/120V	11.5	120	80	4000K	1100	220°	4 5⁄16	15K	045923287671	24/6
S28768*	11.5A19/LED/50K/ND/120V	11.5	120	80	5000K	1100	220°	4 5⁄16	15K	045923287688	24/6
Left hand threaded											
S11310	10A19/LED/830/LHT	10	120	80	3000K	1050	200°	4 ½	15K	045923113109	24
S11311	10A19/LED/840/LHT	10	120	80	4000K	1050	200°	4 ½	15K	045923113116	24

■ Also T24 compliant.

Product sheet SA2254

**See warranty for details.


75W replacement LED A19 4-Pks

- **Direct replacement for 75 Watt incandescent lamps, uses only 11.5-12.5 Watts**
- Indoor residential and commercial lighting
- Direct replacement for 18 Watt screw-in CFLs
- 2700K, 3000K, 4000K and 5000K options
- Damp location
- Approved for totally enclosed fixtures**
- Long life—15,000 hours
- ENERGY STAR certified*
- 3 Year warranty





Beam Profile



Beam Angle: 220°

75W Replacement A19 LED 4-Pks

** ENCLOSED FIXTURE | DAMP LOCATION | c UL us LISTED | * ENERGY STAR

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
Non-Dimmable											
S28769*	11.5A19/LED/27K/ND/120V/4Pk	11.5	120	80	2700K	1100	220°	4 5⁄16	15K	045923287695	12-4Pks
S28770*	11.5A19/LED/50K/ND/120V/4Pk	11.5	120	80	5000K	1100	220°	4 5⁄16	15K	045923287701	12-4Pks
90 CRI—CEC/T20											
S8564	12.5A19/LED/27K/ND/120V/4Pk	12.5	120	90	2700K	1050	220°	4 3⁄8	15K	045923085642	12-4Pks
S8499	12.5A19/LED/30K/ND/120V/4Pk	12.5	120	90	3000K	1050	220°	4 3⁄8	15K	045923084997	12-4Pks
S8489	12.5A19/LED/40K/ND/120V/4Pk	12.5	120	90	4000K	1050	220°	4 3⁄8	15K	045923084898	12-4Pks
S8565	12.5A19/LED/50K/ND/120V/4Pk	12.5	120	90	5000K	1050	220°	4 3⁄8	15K	045923085659	12-4Pks
Must be ordered in full cases only.											

Product sheet SA2152

**See warranty for details.


100W replacement LED A19, A21 lamps

Direct replacement for 100 Watt incandescent lamps, uses only 15-18 Watts

- Indoor residential and commercial lighting
- Damp location
- Dimmable and non-dimmable options
- Approved for totally enclosed fixtures**
- CEC/T20 Compliant options available
- Long life—up to 25,000 hours
- ENERGY STAR certified*
- 3 Year warranty—15,000 hours
- 5 Year warranty—25,000 hours



Beam Profile



Beam Angle: 220°

100W Replacement LED A19 Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
Dimmable											
S29815*	15A19/LED/2700K/1600L/120V/D	15	120	80	2700K	1600	220°	4 5/8	25K	045923298158	24/6
S29816*	15A19/LED/3000K/1600L/120V/D	15	120	80	3000K	1600	220°	4 5/8	25K	045923298165	24/6
S29817*	15A19/LED/4000K/1600L/120V/D	15	120	80	4000K	1600	220°	4 5/8	25K	045923298172	24/6
S29818*	15A19/LED/5000K/1600L/120V/D	15	120	80	5000K	1600	220°	4 5/8	25K	045923298189	24/6
S29819*	15A19/LED/27K/1600/120V/GU24	15	120	80	2700K	1600	220°	4 1/2	25K	045923298196	24/6
S29805*	15A19/LED/40K/1600/120V/GU24	15	120	80	4000K	1600	220°	4 1/2	25K	045923298059	24/6
90 CRI—CEC/T20											
S8652*■	18A21/LED/27K/90CRI	18	120	90	2700K	1600	220°	5 9/16	25K	045923086526	24/6
S8653*■	18A21/LED/30K/90CRI	18	120	90	3000K	1600	220°	5 9/16	25K	045923086533	24/6
S8486	18A21/LED/40K/90CRI	18	120	90	4000K	1600	220°	5 9/16	25K	045923084867	24/6
S8487	18A21/LED/50K/90CRI	18	120	90	5000K	1600	220°	5 9/16	25K	045923084874	24/6
S11326■	18A21/LED/927/120V/D/2Pk	18	120	90	2700K	1600	220°	5 5/8	25K	045923113260	12-2Pks
S11327■	18A21/LED/927/120V/D/GU24	18	120	90	2700K	1600	220°	5 3/8	25K	045923113277	24/6
S11328■	18A21/LED/930/120V/D/GU24	18	120	90	3000K	1600	220°	5 3/8	25K	045923113284	24/6
S8488	18A21/LED/940/120V/D/GU24	18	120	90	4000K	1600	220°	5 3/8	25K	045923084881	24/6
Non-Dimmable											
S28785*	15.5A19/LED/27K/ND/120V	15.5	120	80	2700K	1600	220°	4 5/8	15K	045923287855	24/6
S28786*	15.5A19/LED/30K/ND/120V	15.5	120	80	3000K	1600	220°	4 5/8	15K	045923287862	24/6
S28787*	15.5A19/LED/40K/ND/120V	15.5	120	80	4000K	1600	220°	4 5/8	15K	045923287879	24/6
S28788*	15.5A19/LED/50K/ND/120V	15.5	120	80	5000K	1600	220°	4 5/8	15K	045923287886	24/6

■ Also T24 compliant.

Product sheet SA2255

**See warranty for details.

100W replacement LED A19 4-Pks


Direct replacements for 100W incandescent lamps

- 100 Watt replacement, uses only 15.5 Watts
- Indoor residential and commercial lighting
- Direct replacement for 13, 18 & 23W screw-in CFLs
- 2700K and 5000K options Damp location
- Approved for totally enclosed fixtures**
- Long life—up to 25,000 hours
- ENERGY STAR certified* 3 Year warranty





Beam Profile



Beam Angle: 220°

** ENCLOSED FIXTURE DAMP LOCATION

c UL us LISTED * ENERGY STAR

100W Replacement LED A19 4-Pks

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
100W Replacement											
S11422	15.5A19/LED/827/120V/D/4Pk	15.5	120	80	2700K	1600	230°	4 9/16	15K	045923114229	12-4Pks
S11423	15.5A19/LED/830/120V/D/4Pk	15.5	120	80	3000K	1600	230°	4 9/16	15K	045923114236	12-4Pks
S11424	15.5A19/LED/840/120V/D/4Pk	15.5	120	80	4000K	1600	230°	4 9/16	15K	045923114243	12-4Pks
S11425	15.5A19/LED/850/120V/D/4Pk	15.5	120	80	5000K	1600	230°	4 9/16	15K	045923114250	12-4Pks
Non-Dimmable											
S28789*	15.5A19/LED/27K/ND/120V/4Pk	15.5	120	80	2700K	1600	220°	4 5/8	15K	045923287893	12-4Pks
S28790*	15.5A19/LED/50K/ND/120V/4Pk	15.5	120	80	5000K	1600	220°	4 5/8	15K	045923287909	12-4Pks
90 CRI—CEC/T20 - Non-Dimmable											
S8566	15.5A19/LED/27K/ND/120V/4Pk	15.5	120	90	2700K	1490	220°	4 5/8	15K	045923085666	12-4Pks
S8567	15.5A19/LED/30K/ND/120V/4Pk	15.5	120	90	3000K	1490	220°	4 5/8	15K	045923085673	12-4Pks
S8490	15.5A19/LED/40K/ND/120V/4Pk	15.5	120	90	4000K	1490	220°	4 5/8	15K	045923084904	12-4Pks
S8568	15.5A19/LED/50K/ND/120V/4Pk	15.5	120	90	5000K	1490	220°	4 5/8	15K	045923085680	12-4Pks

Must be ordered in full cases only. Product sheets SA2330, SA2400, SA2180-3


125W replacement 120-277V LED A21 lamps

- Direct replacement for 125 Watt incandescent & 25 Watt CFL lamps, uses only 19 Watts
- Indoor residential and commercial lighting
- Down lighting Display lighting Accent lighting
- 2700K, 3000K, 4000K and 5000K options
- Damp location Approved for totally enclosed fixtures**
- c-UL-us listed Long life—25,000 hours
- ENERGY STAR certified*
- 5 Year warranty





Beam Profile



Beam Angle: 220°

** ENCLOSED FIXTURE DAMP LOCATION

c UL us LISTED * ENERGY STAR

125W Replacement Omni-Directional 120-277V LED A21 Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
Non-Dimmable											
S11329	20A21/LED/927/120-277V/ND	20	120-277	90	2700K	2000	220°	5 9/16	25K	045923113291	24
S11330	20A21/LED/930/120-277V/ND	20	120-277	90	3000K	2000	220°	5 9/16	25K	045923113307	24
S11331	20A21/LED/940/120-277V/ND	20	120-277	90	4000K	2000	220°	5 9/16	25K	045923113314	24
S11332	20A21/LED/950/120-277V/ND	20	120-277	90	5000K	2000	220°	5 9/16	25K	045923113321	24

Product sheet SA2696

**See warranty for details.

Hi-Pro LED A21 lamps


High lumen, A21 lamps for industrial and commercial applications

- For use in bollard and post top lighting
- High ceiling recessed lighting
- Replaces high lumen incandescent and CFL lamps
- Dimmable
- Damp location
- Saves over 80% on energy costs
- Advanced heat dissipation design
- Direct wire range voltage 120-277V options
- High efficiency—up to 150 LPW
- 2700K, 4000K and 5000K options
- Base up, base down or horizontal operation
- Long life—25,000 hours
- ENERGY STAR certified*
- 5 Year limited warranty





Beam Profile



Beam Angle: 280°

High Lumen A21 Industrial/Commercial LED Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
Dimmable											
S8735*	20WA21/LED/2700K/120V/DIM/E26	20	120	80+	2700K	2350	280°	5	25K	045923087356	24/6
S8778*	20WA21/LED/4000K/120V/DIM/E26	20	120	80+	4000K	2747	280°	5	25K	045923087783	24/6
S8736*	20WA21/LED/5000K/120V/DIM/E26	20	120	80+	5000K	2860	280°	5	25K	045923087363	24/6
Non-Dimmable											
S8737*	20WA21/LED/2700K/120-277V/E26	20	120-277	80+	2700K	2450	280°	5	25K	045923087370	24/6
S8779*	20WA21/LED/4000K/120-277V/E26	20	120-277	80+	4000K	2828	280°	5	25K	045923087790	24/6
S8738*	20WA21/LED/5000K/120-277V/E26	20	120-277	80+	5000K	2910	280°	5	25K	045923087387	24/6
Accessories											
92-410	Mog to Med Socket Reducer									045923924064	10/1
80-929	Hard Wire Surge Protector									045923809293	100/1

Product sheet SA2218

**See warranty for details.

Hi-Pro LED
A23 & A25 lamps

Applications

- For use in bollard and post top lighting
- High ceiling recessed lighting

Features

- Replaces high lumen incandescent and CFL lamps and A25 series up to 150W HID
- 25W - E26 and EX39 / up to 3600 lumens
- 35W - EX39 / up to 4800 lumens
- Saves over 80% on energy costs
- Advanced heat dissipation design
- Direct wire range voltage 120-277V
- High efficiency—up to 145 LPW
- 2700K, 4000K, 5000K and 6500K options
- Base up, base down or horizontal operation
- Damp location
- Long life—up to 50,000 hours
- 5 Year limited warranty




S13100



S13104

Beam Profile



Beam Angle: 280°

High Lumen A23 & A25 Industrial/Commercial Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Mstr.
S13100**	25WA23/LED/2700K/120-277V/E26	25	120-277V	80	2700K	3375	280°	6 ¼	25K	045923131004	24
S13101**	25WA23/LED/4000K/120-277V/E26	25	120-277V	80	4000K	3575	280°	6 ¼	25K	045923131011	24
S13102**	25WA23/LED/5000K/120-277V/E26	25	120-277V	80	5000K	3625	280°	6 ¼	25K	045923131028	24
S13103	25WA23/LED/6500K/120-277V/E26	25	120-277V	80	6500K	3625	280°	6 ¼	25K	045923131035	24
S13104*	25WA23/LED/HID/2700K/120-277V/EX39	25	120-277V	80	2700K	3375	280°	6 ⅝	50K	045923131042	24
S13105*	25WA23/LED/HID/4000K/120-277V/EX39	25	120-277V	80	4000K	3575	280°	6 ⅝	50K	045923131059	24
S13106*	25WA23/LED/HID/5000K/120-277V/EX39	25	120-277V	80	5000K	3625	280°	6 ⅝	50K	045923131066	24
S13107	25WA23/LED/HID/6500K/120-277V/EX39	25	120-277V	80	6500K	3625	280°	6 ⅝	50K	045923131073	24
S13108*	35WA25/LED/HID/2700K/120-277V/EX39	35	120-277V	80	2700K	4480	280°	7 ¼	50K	045923131080	24
S13109*	35WA25/LED/HID/4000K/120-277V/EX39	35	120-277V	80	4000K	4725	280°	7 ¼	50K	045923131097	24
S13110*	35WA25/LED/HID/5000K/120-277V/EX39	35	120-277V	80	5000K	4830	280°	7 ¼	50K	045923131103	24
S13111	35WA25/LED/HID/6500K/120-277V/EX39	35	120-277V	80	6500K	4830	280°	7 ¼	50K	045923131110	24

Product sheet SA2492

**See warranty for details.

5W LED decorative flame lamp

- Outdoor fixtures
- Wall sconces
- Faux fireplaces
- Holiday lighting
- Any decorative application
- Base up or base down operation
- 120-277V
- Medium base
- Long life—20,000 hours
- c-UL-us listed
- 2 Year warranty

Multi-function options — controlled by quickly turning wall switch on-off-on

- Flame mode
- Auto slow-dim cycle
- Constant warm glow 1300K





360° BEAM · 20,000 HOURS · c UL us LISTED

5W LED Decorative Flame Lamps

Item Number	Lamp Description	W	Bulb Type	Base	V	CCT	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9806	5W/LED/FLAME BULB/120V	5	T10	E26	120-277	1300K	4 ½	20K	045923098062	24

Product sheet SA2326

60W replacement LED A19 Dusk to Dawn lamp

On at dusk, off at dawn

- **Direct replacement for 60 Watt incandescent lamp uses only 8 Watts**
- Indoor/outdoor residential and commercial lighting
- Automatic operation--no timers to set
- Internal sensor works in any direction
- Damp location
- Approved for totally enclosed fixtures**
- E26 Medium base
- 2700K Warm White
- Non-dimmable
- Not compatible with external photo sensors, motion sensors or timers
- c-UL-us Listed
- Long life—up to 15,000 hours
- 3 Year warranty





DAMP LOCATION · ** · ENCLOSED FIXTURE · c UL us LISTED

60W Replacement LED A19 Dusk to Dawn Lamp

Item Number	Lamp Description	Watts	Voltage	CRI	CCT	Lm	Life/ Hrs.	Beam Angle	UPC	Pack
S11421	8A19/DUSK/DAWN/LED/27K	8	120	80	2700K	800	15K	200°	045923114212	1/24

Product sheet SA2667

**See warranty for details.

3-way LED A19 & A21 lamps

- Direct replacement for 30/70/100W 3-Way incandescent lamps, uses only 3/9/12W
- Direct replacement for 50/100/150W 3-Way incandescent lamps uses only 5/15/21W
- Indoor residential and commercial lighting
- 220° Omni-directional
- 2700K, 3000K, 4000K and 5000K options
- Damp location rated
- Approved for totally enclosed fixtures**
- ENERGY STAR certified*
- Long life—25,000 hours
- 3 Year warranty




3/9/12



5/15/21

Beam Profile



Beam Angle: 220°

3-Way LED Lamps

** ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Item Number	Lamp Description	W	V	CRI	CCT	Lumens	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
30/70/100W 3-Way											
S9316*	3/9/12A19/3WAY LED/2700K/120V	3/9/12	120	80	2700K	280/950/1200	220°	4 5/8	25K	045923093166	24/6
S9317*	3/9/12A19/3WAY LED/3000K/120V	3/9/12	120	80	3000K	280/950/1200	220°	4 5/8	25K	045923093173	24/6
S9318	3/9/12A19/3WAY LED/4000K/120V	3/9/12	120	80	4000K	280/950/1200	220°	4 5/8	25K	045923093180	24/6
S9319	3/9/12A19/3WAY LED/5000K/120V	3/9/12	120	80	5000K	280/950/1200	220°	4 5/8	25K	045923093197	24/6
90 CRI—CEC/T20											
S8570*	3/9/12A19/3WAY LED/27K/120V	3/9/12	120	90	2700K	230/850/1050	220°	4 5/8	25K	045923085703	24/6
S8571*	3/9/12A19/3WAY LED/30K/120V	3/9/12	120	90	3000K	230/850/1050	220°	4 5/8	25K	045923085710	24/6
50/100/150W 3-Way											
S8542*	5/15/21A21/3-WAY LED/2700K/120V	5/15/21	120	80	2700K	600/1600/2150	220°	5 9/16	25K	045923085420	24/6
S8543*	5/15/21A21/3-WAY LED/3000K/120V	5/15/21	120	80	3000K	600/1600/2150	220°	5 9/16	25K	045923085437	24/6
S8544	5/15/21A21/3-WAY LED/4000K/120V	5/15/21	120	80	4000K	600/1600/2150	220°	5 9/16	25K	045923085444	24/6
S8545	5/15/21A21/3-WAY LED/5000K/120V	5/15/21	120	80	5000K	600/1600/2150	220°	5 9/16	25K	045923085451	24/6

Product sheet SA2608


**See warranty for details.

40 & 60W Candelabra base replacement LED A19 lamps

- Direct replacements for 9 and 13 Watt candelabra base CFL
- Indoor residential and commercial lighting
- Display lighting
- Accent lighting
- Dimmable
- 2700K, 3000K, 4000K and 5000K options
- Damp location
- Approved for totally enclosed fixtures**
- Long life—25,000 hours
- 5 Year warranty



Beam Profile



Beam Angle: 220°

DIMMABLE ** ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Candelabra Base A19 LED Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
Dimmable											
S21800*	6A19/OMNI/220/LED/E12/27K	6	120	80	2700K	480	220°	4 5⁄16	25K	045923218002	24/6
S21801*	6A19/OMNI/220/LED/E12/30K	6	120	80	3000K	480	220°	4 5⁄16	25K	045923218019	24/6
S21802	6A19/OMNI/220/LED/E12/40K	6	120	80	4000K	480	220°	4 5⁄16	25K	045923218026	24/6
S21803	6A19/OMNI/220/LED/E12/50K	6	120	80	5000K	480	220°	4 5⁄16	25K	045923218033	24/6
S21804*	9.8A19/OMNI/220/LED/E12/27K	9.8	120	80	2700K	800	220°	4 5⁄16	25K	045923218040	24/6
S21805*	9.8A19/OMNI/220/LED/E12/30K	9.8	120	80	3000K	800	220°	4 5⁄16	25K	045923218057	24/6
S21806	9.8A19/OMNI/220/LED/E12/40K	9.8	120	80	4000K	800	220°	4 5⁄16	25K	045923218064	24/6
S21807	9.8A19/OMNI/220/LED/E12/50K	9.8	120	80	5000K	800	220°	4 5⁄16	25K	045923218071	24/6

Product sheet SA2469


LED A19 colors

- Direct replacement for 60 Watt incandescent lamps, uses only 8 Watts
- Indoor residential and commercial lighting
- Party bulbs
- Display lighting
- Accent lighting
- Ceramic-lined glass envelopes
- 360˚ Beam angle
- Damp location
- Approved for totally enclosed fixtures**
- Long life–15,000 hours
- 3 Year warranty



Colors for a reason
- Blue—in support of law enforcement/ Autism awareness
- Green—in support of veterans
- Yellow—bug lights
- Pink—Breast cancer awareness

Beam Profile



Beam Angle: 360°

DIMMABLE 360° BEAM DAMP LOCATION ** ENCLOSED FIXTURE c UL us LISTED

Colored LED Lamps

Item Number	Lamp Description	W	V	CCT	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Mstr.
S14984	8A19/RED/LED/E26/120V	8	120	Red	360°	4 1⁄8	15K	045923149849	24/6
S14985	8A19/BLUE/LED/E26/120V	8	120	Blue	360°	4 1⁄8	15K	045923149856	24/6
S14986	8A19/GREEN/LED/E26/120V	8	120	Green	360°	4 1⁄8	15K	045923149863	24/6
S14987	8A19/YELLOW/E26/120V	8	120	Yellow	360°	4 1⁄8	15K	045923149870	24/6
S14988	8A19/ORANGE/LED/E26/120V	8	120	Orange	360°	4 1⁄8	15K	045923149887	24/6
S14989	8A19/PINK/LED/E26/120V	8	120	Pink	360°	4 1⁄8	15K	045923149894	24/6

Product sheet SA2482

**See warranty for details.

40W replacement LED A15 lamps

Direct replacement for 40 Watt A15 incandescent lamps, uses only 5.5 Watts

Indoor residential and commercial lighting

Dimmable

2700K, 3000K, 4000K and 5000K options

Damp location rated

Approved for totally enclosed fixtures**

Long life—25,000 hours

ENERGY STAR certified*

3 Year warranty




E17 Base



E26 Base

Beam Profile



Beam Angle: 230°

40W Replacement LED Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
S9030*	5.5A15/LED/2700K/120V	5.5	120	80	2700K	450	230°	3 7/16	25K	045923090301	24/6
S9031*	5.5A15/LED/3000K/120V	5.5	120	80	3000K	450	230°	3 7/16	25K	045923090318	24/6
S9032	5.5A15/LED/4000K/120V	5.5	120	80	4000K	450	230°	3 7/16	25K	045923090325	24/6
S9033	5.5A15/LED/5000K/120V	5.5	120	80	5000K	450	230°	3 7/16	25K	045923090332	24/6
S9064	5.5A15/LED/2700K/E17/120V	5.5	120	80	2700K	450	230°	3 7/16	25K	045923090646	24/6
S9065	5.5A15/LED/3000K/E17/120V	5.5	120	80	3000K	450	230°	3 ½	25K	045923090653	24/6
S9067	5.5A15/LED/4000K/E17/120V	5.5	120	80	4000K	450	230°	3 ½	25K	045923090677	24/6
S9068	5.5A15/LED/5000K/E17/120V	5.5	120	80	5000K	450	230°	3 ½	25K	045923090684	24/6
90 CRI—CEC/T20											
S8572	5A15/LED/27K/120V	5	120	90	2700K	450	230°	3 15/32	25K	045923085727	24/6
S8573	5A15/LED/30K/120V	5	120	90	3000K	450	230°	3 15/32	25K	045923085734	24/6

Product sheet SA2267


**See warranty for details.

Decorative LED lamp

- 25W candle replacement uses only 2.8W
- 40W candle replacement uses only up to 4.5W
- Accent lighting • Pendant lighting • Dimmable
- Damp location • Long life—25,000 hours
- Approved for totally enclosed fixtures**
- ENERGY STAR certified* • 5 Year warranty




Candle Beam Profile



Beam Angle: 280°

Globe Beam Profile



Beam Angle: 175°

DIMMABLE · DAMP LOCATION ** · ENCLOSED FIXTURE · c UL us LISTED · * ENERGY STAR

Decorative LED Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S8950	2.8CTC/LED/3000K/E12/120V	2.8	120	80	3000K	160	275°	3 ¾	25K	045923089503	12/1
S8951*	4.5CTC/LED/2700K/E12/120V	4.5	120	80	2700K	300	275°	3 ¾	25K	045923089510	12/1
S8952*	4.5CTC/LED/3000K/E12/120V	4.5	120	80	3000K	300	275°	3 ¾	25K	045923089527	12/1
S8953*	4.5ETC/LED/3000K/E26/120V	4.5	120	80	3000K	300	275°	3 ¾	25K	045923089534	12/1
90 CRI—CEC/T20											
S29618*■	3.5CTC/LED/927/E12/120V	3.5	120	90	2700K	300	290°	3 ¾	25K	045923296185	12/1
S28574	3.5CTC/LED/930/E12/120V	3.5	120	90	3000K	300	290°	3 ¾	25K	045923285745	12/1
S28617	3.5ETC/LED/927/E26/120V	3.5	120	90	2700K	300	290°	3 ¾	25K	045923286179	12/1
S28575	3.5ETC/LED/930/E26/120V	3.5	120	90	3000K	300	290°	3 ¾	25K	045923286179	12/1
GLOBES - G25											
S9200*	6G25/LED/2700K/E26	6	120	80	2700K	450	175°	4 ¼	25K	045923285752	24/6
S9201*	6G25/LED/3000K/E26	6	120	80	3000K	450	175°	4 ¼	25K	045923090530	24/6
S9202	6G25/LED/4000K/E26	6	120	80	4000K	450	175°	4 ¼	25K	045923090691	24/6
S9203	6G25/LED/5000K/E26	6	120	80	5000K	450	175°	4 ¼	25K	045923092039	24/6
90 CRI—CEC/T20											
S29619*■	4G25/LED/927/120V	4	120	90	2700K	360	170	4 ¼	25K	045923296192	24/6
S28576	4G25/LED/930/120V	4	120	90	3000K	360	170	4 ¼	25K	045923285769	24/6
S28618	4G25/LED/940/120V	4	120	90	4000	360	170	4 ¼	25K	045923286186	24/6
S28595	4G25/LED/950/120V	4	120	90	5000K	360	170	4 ¼	25K	045923285950	24/6

■ Also T24 compliant.

Product sheet SA1370

LED Linear T10 lamps

- Energy efficient alternative to traditional 35W, 60W and 150W T10 linear incandescent lamps use only 5W, 7W and 13W
- Direct replacements for LN35, LN60 and LN150 lamps
- Full PC material (bulb opaque)
- Simple installation—no ballasts or transformers required
- S14S Base • Dimmable •2700K
- Long life—30,000 hours
- 5 Year warranty





DIMMABLE · 30,000 HOURS · 2700 K · c UL us LISTED

LED T10 Lamps

Item Number	Lamp Description	W	CRI	Base Type	CCT	Lm	M.O.L." (Nominal)	Life/ Hrs.	UPC	Pack
S8191	5T10/LED/27K/S14S	5	80	S14S	2700K	330	11 13⁄16	30K	045923081910	12
S8189	7T10/LED/27K/S14S	7	80	S14S	2700K	500	18 11⁄16	30K	045923081897	12
S8190	13T10/LED/27K/S14S	13	80	S14S	2700K	1000	39 3⁄8	30K	045923081903	12

Product sheet SA2427

**See warranty for details.

LED squat CFL lamp replacement with GU24 base



Applications

- Indoor residential and commercial lighting
- Utility fixtures
- Closet lighting


Features

- Direct replacement for squat GU24-based CFL lamps
- 13 Watt CFL replacement uses only 9.5 Watts (60W incandescent)
- 18 Watt CFL replacement uses only 12 Watts (75W incandescent)
- GU24 base
- Uniform luminance pattern
- 2700K and 4000K options
- 90 CRI
- Approved for totally enclosed fixtures**
- Damp location
- Long life—25,000 hours
- 5 Year warranty



Replacement for CFL in Satco squat fixtures

Fixtures:
90-2615
90-2616
90-2631
90-2632



Beam Angle: 100°

GU24 BASE | DAMP LOCATION | ** ENCLOSED FIXTURE | c UL us LISTED

LED squat CFL lamp replacement with GU24 base

Item Number	Lamp Description	W	CRI	Bulb Type	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S11540	9.5W/SQUAT/LED/27K/GU24	9.5	90	LED/GU24	100°	2700K	800	2 ⅞	25K	045923115400	24
S11541	9.5W/SQUAT/LED/40K/GU24	9.5	90	LED/GU24	100°	4000K	800	2 ⅞	25K	045923015410	24
S11542	12W/SQUAT/LED/27K/GU24	12	90	LED/GU24	100°	2700K	1100	2 ⅞	25K	045923115424	24
S11543	12W/SQUAT/LED/40K/GU24	12	90	LED/GU24	100°	4000K	1100	2 ⅞	25K	045923115431	24

**Average rated life may vary depending on application, use, fixture type and environment

Product sheet SA2614


**See warranty for details.

R20 LED reflectors 80 & 90 CRI

50R20 replacement uses only up to 6.5 Watts
Indoor residential and commercial lighting
Dimmable • Damp location • Long life—25,000 hours
ENERGY STAR certified* • 3 Year warranty • CEC T20/T24



Beam Profile



Beam Angle: 107°

DIMMABLE · DAMP LOCATION · c UL us LISTED · ENERGY STAR

6.5W R20 LED Reflectors

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bulb Type	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9630*	6.5R20/LED/2700K/525L/120V	6.5	120	80	2700K	525	R20	3 15/16	25K	045923096303	24/6
S9631*	6.5R20/LED/3000K/525L/120V	6.5	120	80	3000K	525	R20	3 15/16	25K	045923096310	24/6
S9632*	6.5R20/LED/4000K/525L/120V	6.5	120	80	4000K	525	R20	3 15/16	25K	045923096327	24/6
S9633*	6.5R20/LED/5000K/525L/120V	6.5	120	80	5000K	525	R20	3 15/16	25K	045923096334	24/6
90 CRI—CEC/T20											
S29614*■	6R20/LED/927/120V	6	120	90	2700K	525	R20	3 15/16	25K	045923296147	24/6
S28577■	6R20/LED/930/120V	6	120	90	3000K	525	R20	3 15/16	25K	045923285776	24/6
S28491■	6R20/LED/940/120V	6	120	90	4000K	525	R20	3 15/16	25K	045923284915	24/6
S28619■	6R20/LED/950/120V	6	120	90	5000K	525	R20	3 15/16	25K	045923286193	24/6

■ Also T24 compliant.


Product sheet SA2629

BR30 LED reflectors 80 & 90 CRI

65BR30 replacement uses only up to 9.5 Watts
Indoor residential and commercial lighting
Display lighting • New one piece, lighter weight design
Dimmable • Long life—25,000 hours
ENERGY STAR certified*
3 Year warranty • CEC T20/T24



Beam Profile



Beam Angle: 105°

DIMMABLE · DAMP LOCATION · c UL us LISTED · ENERGY STAR

9.5W BR30 LED Reflectors

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bulb Type	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9620*	9.5BR30/LED/2700K/750L/120V/D	9.5	120	80	2700K	750	BR30	5 3/16	25K	045923096204	12/6
S9621*	9.5BR30/LED/3000K/750L/120V/D	9.5	120	80	3000K	750	BR30	5 3/16	25K	045923096211	12/6
S9622*	9.5BR30/LED/4000K/750L/120V/D	9.5	120	80	4000K	750	BR30	5 3/16	25K	045923096228	12/6
S9623*	9.5BR30/LED/5000K/750L/120V/D	9.5	120	80	5000K	750	BR30	5 3/16	25K	045923096235	12/6
S9624*	9.5BR30/LED/2700K/GU24/750L/120V	9.5	120	80	2700K	750	BR30	4 15/16	25K	045923096242	12/6
S9627	9.5BR30/LED/3000K/GU24/750L/120V	9.5	120	80	3000K	750	BR30	4 15/16	25K	045923096273	12/6
90 CRI—CEC/T20											
S29625*■	7.5BR30/LED/927/120V	7.5	120	90	2700K	650	BR30	5 3/16	25K	045923296253	12/6
S28578*■	7.5BR30/LED/930/120V	7.5	120	90	3000K	650	BR30	5 3/16	25K	045923285783	12/6
S28547*■	7.5BR30/LED/935/120V	7.5	120	90	3500K	650	BR30	5 3/16	25K	045923285479	12/6
S28492*■	7.5BR30/LED/940/120V	7.5	120	90	4000K	650	BR30	5 3/16	25K	045923284922	12/6
S28596*	7.5BR30/LED/950/120V	7.5	120	90	5000K	650	BR30	5 3/16	25K	045923285967	12/6
S11333■	7.5BR30/LED/927/120V/2PK	7.5	120	90	2700K	650	BR30	5 1/4	25K	04592311333	12/6
S29626*■	7.5BR30/LED/927/GU24/120V	7.5	120	90	2700K	650	BR30	4 15/16	25K	045923296260	12/6
S28579*■	7.5BR30/LED/930/GU24/120V	7.5	120	90	3000K	650	BR30	4 15/16	25K	045923285790	12/6

■ Also T24 compliant.

Product sheet SA1784

See warranty for details.

8W BR30 LED 2-pack display


Great efficiency, even greater value – now in convenient 2-Pks

- 65 Watt replacement uses only 8 Watts
- Indoor residential and commercial lighting
- Great for retail end caps or counter areas
- 2700K
- Dimmable*
- Damp location
- High efficiency
- Long life—25,000 hours
- ENERGY STAR certified*
- 3 Year warranty





Sold 24 2-Pks per display

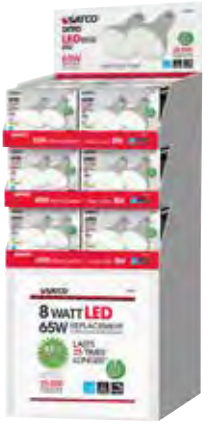

8W BR30 LED 2-Pack Display

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
S9698*	8BR30/LED/2700K/650L/2Pack	8	120	80+	2700K	650	105°	5 3⁄16	25K	045923096983	24-2Pks

Must be ordered in full cases only.


Product sheet SA2042

11.5W & 16.5W BR40 LED reflectors 80 & 90 CRI

- 65W BR40 replacement uses only up to 13 Watts
- 85W BR40 replacement uses only 16.5 Watts
- Indoor residential and commercial lighting
- Dimmable
- Damp location
- Long life—25,000 hours
- ENERGY STAR certified*
- 3 Year warranty



Beam Profile



Beam Angle: 103°

11.5, 13 & 16.5W BR40 LED Reflectors 80 & 90 CRI

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bulb Type	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9634*	11.5BR40/LED/2700K/940L/120V	11.5	120	80	2700K	940	BR40	6 7⁄16	25K	045923096341	12/6
S9635*	11.5BR40/LED/3000K/940L/120V	11.5	120	80	3000K	940	BR40	6 7⁄16	25K	045923096358	12/6
S9636*	11.5BR40/LED/4000K/940L/120V	11.5	120	80	4000K	940	BR40	6 7⁄16	25K	045923096365	12/6
S9637*	11.5BR40/LED/5000K/940L/120V	11.5	120	80	5000K	940	BR40	6 7⁄16	25K	045923096372	12/6
S9638*	16.5BR40/LED/2700K/1200L/120V	16.5	120	80	2700K	1200	BR40	6 7⁄16	25K	045923096389	12/6
S9639*	16.5BR40/LED/3000K/1200L/120V	16.5	120	80	3000K	1200	BR40	6 7⁄16	25K	045923096396	12/6
S9640*	16.5BR40/LED/4000K/1200L/120V	16.5	120	80	4000K	1200	BR40	6 7⁄16	25K	045923096402	12/6
S9641*	16.5BR40/LED/5000K/1200L/120V	16.5	120	80	5000K	1200	BR40	6 7⁄16	25K	045923096419	12/6
90 CRI—CEC/T20											
S29615*■	13BR40/LED/927/120V	13	120	90	2700K	1075	BR40	6 7⁄16	25K	045923296154	12/6
S28580*■	13BR40/LED/930/120V	13	120	90	3000K	1075	BR40	6 7⁄16	25K	045923285806	12/6
S28493*■	13BR40/LED/940/120V	13	120	90	4000K	1075	BR40	6 7⁄16	25K	045923284939	12/6
S28597*	13BR40/LED/950/120V	13	120	90	5000K	1075	BR40	6 7⁄16	25K	045923285974	12/6

■ Also T24 compliant.

Product sheet SA1812

See warranty for details.

10W BR30 LED reflector display Pks and 6 Pks

- 65W BR30 replacement uses only 10 Watts
- Indoor residential and commercial lighting
- 2700K
- Dimmable
- Damp location
- Long life—25,000 hours
- ENERGY STAR certified*
- 3 Year warranty





6 pack
Contractor pack

Display Pack



DIMMABLE | DAMP LOCATION | c UL us LISTED | * ENERGY STAR

10W BR30 LED Reflector

Item Number	Lamp Description	W	V	CRI	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
Display Pack										
S29628*	10BR30/LED/2700K/700L/120V/D	10	120	80	2700K	700	5 ⅛	25K	045923296284	48
6 Packs										
S9021	10BR30/LED/827/120V/6Pk	10	120	80	2700K	700	5 ⅛	25K	045923090219	4-6Pks
S9022*	10BR30/LED/830/120V/6Pk	10	120	80	3000K	700	5 ⅛	25K	045923090226	4-6Pks
S9029	10BR30/LED/840/120V/6Pk	10	120	80	4000K	700	5 ⅛	25K	045923090295	4-6Pks
S9058	**10BR30/LED/850/120V/6PK**	10	120	80	5000K`	700	5 ⅛	25K	**045923090585**	4-6Pks
90 CRI—CEC/T20										
S11420*	8.7BR30/LED/927/120V/6PK	8.7	120	80	2700K	700	5 ⅛	25K	045923114205	4-6Pks

Must be ordered in full cases only.

Product sheet SA2281

7W LED PAR20 - amber

- Solid state LED lighting
- Reflector replacement lamp
- Long life—25,000 hours
- Amber color - 620nm - Sea turtle friendly



c UL us LISTED

7W LED PAR20 - Amber

Item Number	Lamp Description	W	V	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
S29188	7PAR20/LED/40'/AMBER/120V	7	120	AMBER	340	40°	3 ¼	25K	045923291883	24/6

Product sheet SA1641


See warranty for details.

Silver PAR - Gen 2


PAR20

- Silver colored reflector
- Traditional lens
- Wet location – Indoor/Outdoor
- Dimmable
- 25˚, 40˚ and 60˚ Beam spreads
- 2700K, 3000k, 3500k, 4000K and 5000k
- 90 CRI



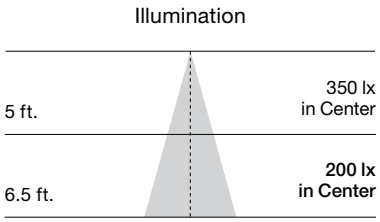

Beam Angle: 25°

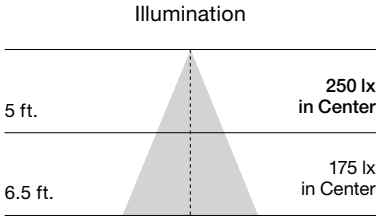

Beam Angle: 40°

DIMMABLE | 90 CRI | WET LOCATION** | ENCLOSED FIXTURE | T20 COMPLIANT | T24 COMPLIANT* | c UL us LISTED | ENERGY STAR


Item Number	Description	W	V	CRI	CCT	Color Temp.	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
PAR20 6.5W LED - 50W Replacement												
S29400*	6.5PAR20/LED/25'/927/120V	6.5	120V	90	2700K	Warm White	520	25°	3	25K	045923294006	24/6
S29401*	6.5PAR20/LED/25'/930/120V	6.5	120V	90	3000K	Soft White	520	25°	3	25K	045923294013	24/6
S29402*	6.5PAR20/LED/25'/935/120V	6.5	120V	90	3500K	Neutral White	520	25°	3	25K	045923294020	24/6
S29403*	6.5PAR20/LED/25'/940/120V	6.5	120V	90	4000K	Cool White	520	25°	3	25K	045923294037	24/6
S29404	6.5PAR20/LED/25'/950/120V	6.5	120V	90	5000K	Natural Light	520	25°	3	25K	045923294044	24/6
S29405*	6.5PAR20/LED/40'/927/120V	6.5	120V	90	2700K	Warm White	520	40°	3	25K	045923294051	24/6
S29406*	6.5PAR20/LED/40'/930/120V	6.5	120V	90	3000K	Soft White	520	40°	3	25K	045923294068	24/6
S29407*	6.5PAR20/LED/40'/935/120V	6.5	120V	90	3500K	Neutral White	520	40°	3	25K	045923294075	24/6
S29408*	6.5PAR20/LED/40'/940/120V	6.5	120V	90	4000K	Cool White	520	40°	3	25K	045923294082	24/6
S29409	6.5PAR20/LED/40'/950/120V	6.5	120V	90	5000K	Natural Light	520	40°	3	25K	045923294099	24/6

Product sheet SA2723


**See warranty for details.

PAR30/SN






Beam Angle: 25°




Beam Angle: 40°




Beam Angle: 60°

PAR30/LN






Beam Angle: 25°



Beam Angle: 40°



Beam Angle: 60°

DIMMABLE · 90 CRI · WET LOCATION** · ENCLOSED FIXTURE · T20 COMPLIANT · T24 COMPLIANT* · c UL us LISTED · ENERGY STAR


Item Number	Description	W	V	CRI	CCT	Color Temp.	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
PAR30 Short Neck 13W LED - 75W Replacement												
S29410*	12.5PAR30/SN/LED/25'/927/120V	12.5	120V	90	2700K	Warm White	1000	25°	3 9/16	25K	045923294105	12/6
S29411*	12.5PAR30/SN/LED/25'/930/120V	12.5	120V	90	3000K	Soft White	1000	25°	3 9/16	25K	045923294112	12/6
S29412*	12.5PAR30/SN/LED/25'/935/120V	12.5	120V	90	3500K	Neutral White	1000	25°	3 9/16	25K	045923294129	12/6
S29413*	12.5PAR30/SN/LED/25'/940/120V	12.5	120V	90	4000K	Cool White	1000	25°	3 9/16	25K	045923294136	12/6
S29414	12.5PAR30/SN/LED/25'/950/120V	12.5	120V	90	5000K	Natural Light	1000	25°	3 9/16	25K	045923294143	12/6
S29415*	12.5PAR30/SN/LED/40'/927/120V	12.5	120V	90	2700K	Warm White	1000	40°	3 9/16	25K	045923294150	12/6
S29416*	12.5PAR30/SN/LED/40'/930/120V	12.5	120V	90	3000K	Soft White	1000	40°	3 9/16	25K	045923294167	12/6
S29417*	12.5PAR30/SN/LED/40'/935/120V	12.5	120V	90	3500K	Neutral White	1000	40°	3 9/16	25K	045923294174	12/6
S29418*	12.5PAR30/SN/LED/40'/940/120V	12.5	120V	90	4000K	Cool White	1000	40°	3 9/16	25K	045923294181	12/6
S29419	12.5PAR30/SN/LED/40'/950/120V	12.5	120V	90	5000K	Natural Light	1000	40°	3 9/16	25K	045923294198	12/6
S29420*	12.5PAR30/SN/LED/60'/927/120V	12.5	120V	90	2700K	Warm White	1000	60°	3 9/16	25K	045923294204	12/6
S29421*	12.5PAR30/SN/LED/60'/930/120V	12.5	120V	90	3000K	Soft White	1000	60°	3 9/16	25K	045923294211	12/6
S29422*	12.5PAR30/SN/LED/60'/935/120V	12.5	120V	90	3500K	Neutral White	1000	60°	3 9/16	25K	045923294228	12/6
S29423*	12.5PAR30/SN/LED/60'/940/120V	12.5	120V	90	4000K	Cool White	1000	60°	3 9/16	25K	045923294235	12/6
S29424	12.5PAR30/SN/LED/60'/950/120V	12.5	120V	90	5000K	Natural Light	1000	60°	3 9/16	25K	045923294242	12/6
PAR30 Long Neck 13W LED - 75W Replacement												
S29425*	12.5PAR30/LN/LED/25'/927/120V	12.5	120V	90	2700K	Warm White	1000	25°	4 9/16	25K	045923294259	12/6
S29426*	12.5PAR30/LN/LED/25'/930/120V	12.5	120V	90	3000K	Soft White	1000	25°	4 9/16	25K	045923294266	12/6
S29427*	12.5PAR30/LN/LED/25'/935/120V	12.5	120V	90	3500K	Neutral White	1000	25°	4 9/16	25K	045923294273	12/6
S29428*	12.5PAR30/LN/LED/25'/940/120V	12.5	120V	90	4000K	Cool White	1000	25°	4 9/16	25K	045923294280	12/6
S29429	12.5PAR30/LN/LED/25'/950/120V	12.5	120V	90	5000K	Natural Light	1000	25°	4 9/16	25K	045923294297	12/6
S29430*	12.5PAR30/LN/LED/40'/927/120V	12.5	120V	90	2700K	Warm White	1000	40°	4 9/16	25K	045923294303	12/6
S29431*	12.5PAR30/LN/LED/40'/930/120V	12.5	120V	90	3000K	Soft White	1000	40°	4 9/16	25K	045923294310	12/6
S29432*	12.5PAR30/LN/LED/40'/935/120V	12.5	120V	90	3500K	Neutral White	1000	40°	4 9/16	25K	045923294327	12/6
S29433*	12.5PAR30/LN/LED/40'/940/120V	12.5	120V	90	4000K	Cool White	1000	40°	4 9/16	25K	045923294334	12/6
S29434	12.5PAR30/LN/LED/40'/950/120V	12.5	120V	90	5000K	Natural Light	1000	40°	4 9/16	25K	045923294341	12/6
S29435*	12.5PAR30/LN/LED/60'/927/120V	12.5	120V	90	2700K	Warm White	1000	60°	4 9/16	25K	045923294358	12/6
S29436*	12.5PAR30/LN/LED/60'/930/120V	12.5	120V	90	3000K	Soft White	1000	60°	4 9/16	25K	045923294365	12/6
S29437*	12.5PAR30/LN/LED/60'/935/120V	12.5	120V	90	3500K	Neutral White	1000	60°	4 9/16	25K	045923294372	12/6
S29438*	12.5PAR30/LN/LED/60'/940/120V	12.5	120V	90	4000K	Cool White	1000	60°	4 9/16	25K	045923294389	12/6
S29439	12.5PAR30/LN/LED/60'/950/120V	12.5	120V	90	5000K	Natural Light	1000	60°	4 9/16	25K	045923294396	12/6

Product sheet SA2723


**See warranty for details.

PAR38






Beam Angle: 25°

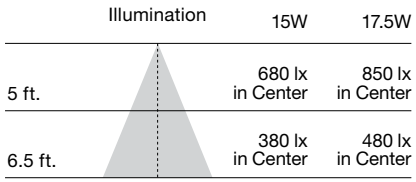

Beam Angle: 40°



Beam Angle: 60°

DIMMABLE | 90 CRI | WET LOCATION | ** ENCLOSED FIXTURE | T20 COMPLIANT | * T24 COMPLIANT | c UL us LISTED | ENERGY STAR


Item Number	Description	W	V	CRI	CCT	Color Temp.	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
PAR 38 15W LED - 90W Replacement												
S29440*	15PAR38/LED/25'/927/120V	15	120V	90	2700K	Warm White	1200	25°	5 13/16	25K	045923294402	12/6
S29441*	15PAR38/LED/25'/930/120V	15	120V	90	3000K	Soft White	1200	25°	5 13/16	25K	045923294419	12/6
S29442*	15PAR38/LED/25'/935/120V	15	120V	90	3500K	Neutral White	1200	25°	5 13/16	25K	045923294426	12/6
S29443*	15PAR38/LED/25'/940/120V	15	120V	90	4000K	Cool White	1200	25°	5 13/16	25K	045923294433	12/6
S29444	15PAR38/LED/25'/950/120V	15	120V	90	5000K	Natural Light	1200	25°	5 13/16	25K	045923294440	12/6
S29445*	15PAR38/LED/40'/927/120V	15	120V	90	2700K	Warm White	1200	40°	5 13/16	25K	045923294457	12/6
S29446*	15PAR38/LED/40'/930/120V	15	120V	90	3000K	Soft White	1200	40°	5 13/16	25K	045923294464	12/6
S29447*	15PAR38/LED/40'/935/120V	15	120V	90	3500K	Neutral White	1200	40°	5 13/16	25K	045923294471	12/6
S29448*	15PAR38/LED/40'/940/120V	15	120V	90	4000K	Cool White	1200	40°	5 13/16	25K	045923294488	12/6
S29449	15PAR38/LED/40'/950/120V	15	120V	90	5000K	Natural Light	1200	40°	5 13/16	25K	045923294495	12/6
S29450*	15PAR38/LED/60'/927/120V	15	120V	90	2700K	Warm White	1200	60°	5 13/16	25K	045923294501	12/6
S29451*	15PAR38/LED/60'/930/120V	15	120V	90	3000K	Soft White	1200	60°	5 13/16	25K	045923294518	12/6
S29452*	15PAR38/LED/60'/935/120V	15	120V	90	3500K	Neutral White	1200	60°	5 13/16	25K	045923294525	12/6
S29453*	15PAR38/LED/60'/940/120V	15	120V	90	4000K	Cool White	1200	60°	5 13/16	25K	045923294532	12/6
S29454	15PAR38/LED/60'/950/120V	15	120V	90	5000K	Natural Light	1200	60°	5 13/16	25K	045923294549	12/6
PAR38 17.5W LED - 120W Replacement												
S29455*	17.5PAR38/LED/40'/930/120V	17.5	120V	90	3000K	Cool White	1400	40°	5 13/16	25K	045923294556	12/6
S29456*	17.5PAR38/LED/40'/940/120V	17.5	120V	90	4000K	Neutral White	1400	40°	5 13/16	25K	045923294563	12/6
PAR38 15W LED 2 Pack - Non-Dimmable - 90W Replacement												
S29457*	15PAR38/LED/60'/930/120V/ ND/2Pk	15	120V	90	3000K	Soft White	1200	60°	5 13/16	25K	045923294570	8/2


Product sheet SA2723

**See warranty for details.

LED Silver PAR lamps
G1 Series







7W LED PAR20 lamps

- 50W PAR20 replacement uses only 7 Watts
- Down lighting
- Track lighting
- Dimmable
- Indoor/outdoor / wet location
- Approved for totally enclosed fixtures**
- Long life—25,000 hours
- ENERGY STAR certified*
- 3 Year warranty

LED PAR Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Color Temp.	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
LED PAR20 - Replaces 50W												
S9400*	7PAR20/LED/25'/2700K/120V/SP	7	120	80	2700K	Warm White	525	25°	3 1⁄16	25K	045923094002	24/6
S9401*	7PAR20/LED/25'/3000K/120V/SP	7	120	80	3000K	Soft White	525	25°	3 1⁄16	25K	045923094019	24/6
S9402*	7PAR20/LED/25'/3500K/120V/SP	7	120	80	3500K	Neutral White	525	25°	3 1⁄16	25K	045923094026	24/6
S9403*	7PAR20/LED/25'/4000K/120V/SP	7	120	80	4000K	Cool White	525	25°	3 1⁄16	25K	045923094033	24/6
S9404*	7PAR20/LED/25'/5000K/120V/SP	7	120	80	5000K	Natural Light	525	25°	3 1⁄16	25K	045923094040	24/6
S9405*	7PAR20/LED/40'/2700K/120V/FL	7	120	80	2700K	Warm White	525	40°	3 1⁄16	25K	045923094057	24/6
S9406*	7PAR20/LED/40'/3000K/120V/FL	7	120	80	3000K	Soft White	525	40°	3 1⁄16	25K	045923094064	24/6
S9407*	7PAR20/LED/40'/3500K/120V/FL	7	120	80	3500K	Neutral White	525	40°	3 1⁄16	25K	045923094071	24/6
S9408*	7PAR20/LED/40'/4000K/120V/FL	7	120	80	4000K	Cool White	525	40°	3 1⁄16	25K	045923094088	24/6
S9409*	7PAR20/LED/40'/5000K/120V/FL	7	120	80	5000K	Natural Light	525	40°	3 1⁄16	25K	045923094095	24/6
90 CRI—CEC/T20												
S9485*■	7PAR20/LED/40'/27K/90CRI	7	120	90	2700K	Warm White	470	40°	3	25K	045923094859	24/6
S8581*■	7PAR20/LED/40'/30K/90CRI	7	120	90	3000K	Soft White	470	40°	3	25K	045923085819	24/6
S8494*	7PAR20/LED/40'/40K/90CRI	7	120	90	4000K	Cool White	470	40°	3	25K	045923084942	24/6
S8598*	7PAR20/LED/40'/50K/90CRI	7	120	90	5000K	Natural Light	470	40°	3	25K	045923085987	24/6

■ Also T24 compliant.

Product sheet SA1393


**See warranty for details.

13W LED PAR30 short neck lamps

- 50W PAR30 short neck replacement uses only 13 Watts
- Down lighting
- Track lighting
- Dimmable
- Indoor/outdoor/wet location
- Approved for totally enclosed fixtures**
- Long life—25,000 hours
- ENERGY STAR certified*
- 3 Year warranty




Illumination




Beam Angle : 25°

Illumination



Beam Angle : 40°

Illumination



Beam Angle: 60°

LED PAR Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Color Temp.	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
LED PAR30 Short Neck - Replaces 50W												
S9410*	13PAR30/SN/LED/25'/2700K/120V/SP	13	120	80	2700K	Warm White	1000	25°	3 ⅝	25K	045923094101	12/6
S9411*	13PAR30/SN/LED/25'/3000K/120V/SP	13	120	80	3000K	Soft White	1000	25°	3 ⅝	25K	045923094118	12/6
S9412*	13PAR30/SN/LED/25'/3500K/120V/SP	13	120	80	3500K	Neutral White	1000	25°	3 ⅝	25K	045923094125	12/6
S9413*	13PAR30/SN/LED/25'/4000K/120V/SP	13	120	80	4000K	Cool White	1000	25°	3 ⅝	25K	045923094132	12/6
S9414*	13PAR30/SN/LED/25'/5000K/120V/SP	13	120	80	5000K	Natural Light	1000	25°	3 ⅝	25K	045923094149	12/6
S9415*	13PAR30/SN/LED/40'/2700K/120V/FL	13	120	80	2700K	Warm White	1000	40°	3 ⅝	25K	045923094156	12/6
S9416*	13PAR30/SN/LED/40'/3000K/120V/FL	13	120	80	3000K	Soft White	1000	40°	3 ⅝	25K	045923094163	12/6
S9417*	13PAR30/SN/LED/40'/3500K/120V/FL	13	120	80	3500K	Neutral White	1000	40°	3 ⅝	25K	045923094170	12/6
S9418*	13PAR30/SN/LED/40'/4000K/120V/FL	13	120	80	4000K	Cool White	1000	40°	3 ⅝	25K	045923094187	12/6
S9419*	13PAR30/SN/LED/40'/5000K/120V/FL	13	120	80	5000K	Natural Light	1000	40°	3 ⅝	25K	045923094194	12/6
S9420*	13PAR30/SN/LED/60'/2700K/120V/WFL	13	120	80	2700K	Warm White	1000	60°	3 ⅝	25K	045923094200	12/6
S9421*	13PAR30/SN/LED/60'/3000K/120V/WFL	13	120	80	3000K	Soft White	1000	60°	3 ⅝	25K	045923094217	12/6
S9422*	13PAR30/SN/LED/60'/3500K/120V/WFL	13	120	80	3500K	Neutral White	1000	60°	3 ⅝	25K	045923094224	12/6
S9423*	13PAR30/SN/LED/60'/4000K/120V/WFL	13	120	80	4000K	Cool White	1000	60°	3 ⅝	25K	045923094231	12/6
S9424*	13PAR30/SN/LED/60'/5000K/120V/WFL	13	120	80	5000K	Natural Light	1000	60°	3 ⅝	25K	045923094248	12/6
90 CRI—CEC/T20												
S9486*■	13PAR30/SN/LED/40'/27K/90CRI	13	120	90	2700K	Warm White	820	40°	3 ⅝	25K	045923094866	12/6
S8582*■	13PAR30/SN/LED/40'/30K/90CRI	13	120	90	3000K	Soft White	820	40°	3 ⅝	25K	045923085826	12/6
S8495*	13PAR30/SN/LED/40'/40K/90CRI	13	120	90	4000K	Cool White	820	40°	3 ⅝	25K	045923084959	12/6

■ Also T24 compliant.


Product sheet SA1393


**See warranty for details.


13W LED PAR30 long neck lamps

- 75W PAR30 long neck replacement uses only 13 Watts
- Down lighting
- Track lighting
- Dimmable
- Indoor/outdoor/wet location
- Approved for totally enclosed fixtures**
- Long life—25,000 hours
- ENERGY STAR certified*
- 3 Year warranty









LED PAR Lamps

DIMMABLE ** ENCLOSED FIXTURE WET LOCATION c UL us LISTED * ENERGY STAR

Item Number	Lamp Description	W	V	CRI	CCT	Color Temp.	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
LED PAR30 Long Neck - Replaces 75W												
S9425*	13PAR30/LN/LED/25'/2700K/120V/SP	13	120	80	2700K	Warm White	1000	25°	4 9/16	25K	045923094255	12/6
S9426*	13PAR30/LN/LED/25'/3000K/120V/SP	13	120	80	3000K	Soft White	1000	25°	4 9/16	25K	045923094262	12/6
S9427*	13PAR30/LN/LED/25'/3500K/120V/SP	13	120	80	3500K	Neutral White	1000	25°	4 9/16	25K	045923094279	12/6
S9428*	13PAR30/LN/LED/25'/4000K/120V/SP	13	120	80	4000K	Cool White	1000	25°	4 9/16	25K	045923094286	12/6
S9429*	13PAR30/LN/LED/25'/5000K/120V/SP	13	120	80	5000K	Natural Light	1000	25°	4 9/16	25K	045923094293	12/6
S9430*	13PAR30/LN/LED/40'/2700K/120V/FL	13	120	80	2700K	Warm White	1000	40°	4 9/16	25K	045923094309	12/6
S9431*	13PAR30/LN/LED/40'/3000K/120V/FL	13	120	80	3000K	Soft White	1000	40°	4 9/16	25K	045923094316	12/6
S9432*	13PAR30/LN/LED/40'/3500K/120V/FL	13	120	80	3500K	Neutral White	1000	40°	4 9/16	25K	045923094323	12/6
S9433*	13PAR30/LN/LED/40'/4000K/120V/FL	13	120	80	4000K	Cool White	1000	40°	4 9/16	25K	045923094330	12/6
S9434*	13PAR30/LN/LED/40'/5000K/120V/FL	13	120	80	5000K	Natural Light	1000	40°	4 9/16	25K	045923094347	12/6
S9435*	13PAR30/LN/LED/60'/2700K/120V/WFL	13	120	80	2700K	Warm White	1000	60°	4 9/16	25K	045923094354	12/6
S9436*	13PAR30/LN/LED/60'/3000K/120V/WFL	13	120	80	3000K	Soft White	1000	60°	4 9/16	25K	045923094361	12/6
S9437*	13PAR30/LN/LED/60'/3500K/120V/WFL	13	120	80	3500K	Neutral White	1000	60°	4 9/16	25K	045923094378	12/6
S9438*	13PAR30/LN/LED/60'/4000K/120V/WFL	13	120	80	4000K	Cool White	1000	60°	4 9/16	25K	045923094385	12/6
S9439*	13PAR30/LN/LED/60'/5000K/120V/WFL	13	120	80	5000K	Natural Light	1000	60°	4 9/16	25K	045923094392	12/6
90 CRI—CEC/T20												
S9487*■	13PAR30/LN/LED/40'/27K/90CRI	13	120	90	2700K	Warm White	820	40°	4 19/32	25K	045923094873	12/6
S8583*■	13PAR30/LN/LED/40'/30K/90CRI	13	120	90	3000K	Soft White	820	40°	4 19/32	25K	045923085833	12/6
S8496*	13PAR30/LN/LED/40'/40K/90CRI	13	120	90	4000K	Cool White	820	40°	4 19/32	25K	045923084966	12/6

■ Also T24 compliant.

Product sheet SA1393

**See warranty for details.

15 & 18W LED PAR38 lamps

90 & 100W PAR38 replacement uses only 15-18 Watts

- Down lighting
- Track lighting
- Dimmable
- Indoor/outdoor/wet location
- Approved for totally enclosed fixtures**
- Long life—25,000 hours
- ENERGY STAR certified*
- 3 Year warranty







S9480 S9481




S9482 S9483 S9484



Beam Angle : 25°



Beam Angle : 40°



Beam Angle: 60°

DIMMABLE ** ENCLOSED FIXTURE WET LOCATION c UL us LISTED * ENERGY STAR

LED PAR Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Color Temp.	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
LED PAR38 - Replaces 90W												
S9440*	15PAR38/LED/25'/2700K/120V/SP	15	120	80	2700K	Warm White	1200	25°	5 3⁄16	25K	045923094408	12/6
S9441*	15PAR38/LED/25'/3000K/120V/SP	15	120	80	3000K	Soft White	1200	25°	5 3⁄16	25K	045923094415	12/6
S9442*	15PAR38/LED/25'/3500K/120V/SP	15	120	80	3500K	Neutral White	1200	25°	5 3⁄16	25K	045923094422	12/6
S9443*	15PAR38/LED/25'/4000K/120V/SP	15	120	80	4000K	Cool White	1200	25°	5 3⁄16	25K	045923094439	12/6
S9444*	15PAR38/LED/25'/5000K/120V/SP	15	120	80	5000K	Natural Light	1200	25°	5 3⁄16	25K	045923094446	12/6
S9445*	15PAR38/LED/40'/2700K/120V/FL	15	120	80	2700K	Warm White	1200	40°	5 3⁄16	25K	045923094453	12/6
S9446*	15PAR38/LED/40'/3000K/120V/FL	15	120	80	3000K	Soft White	1200	40°	5 3⁄16	25K	045923094460	12/6
S9447*	15PAR38/LED/40'/3500K/120V/FL	15	120	80	3500K	Neutral White	1200	40°	5 3⁄16	25K	045923094477	12/6
S9448*	15PAR38/LED/40'/4000K/120V/FL	15	120	80	4000K	Cool White	1200	40°	5 3⁄16	25K	045923094484	12/6
S9449*	15PAR38/LED/40'/5000K/120V/FL	15	120	80	5000K	Natural Light	1200	40°	5 3⁄16	25K	045923094491	12/6
S9450*	15PAR38/LED/60'/2700K/120V/WFL	15	120	80	2700K	Warm White	1200	60°	5 3⁄16	25K	045923094507	12/6
S9451*	15PAR38/LED/60'/3000K/120V/WFL	15	120	80	3000K	Soft White	1200	60°	5 3⁄16	25K	045923094514	12/6
S9452*	15PAR38/LED/60'/3500K/120V/WFL	15	120	80	3500K	Neutral White	1200	60°	5 3⁄16	25K	045923094521	12/6
S9453*	15PAR38/LED/60'/4000K/120V/WFL	15	120	80	4000K	Cool White	1200	60°	5 3⁄16	25K	045923094538	12/6
S9454*	15PAR38/LED/60'/5000K/120V/WFL	15	120	80	5000K	Natural Light	1200	60°	5 3⁄16	25K	045923094545	12/6
90 CRI—CEC/T20												
S9488*■	15PAR38/LED/40'/27K	15	120	90	2700K	Warm White	1000	40°	5 3⁄16	25K	045923094880	12/6
S8584*■	15PAR38/LED/40'/30K	15	120	90	3000K	Soft White	1000	40°	5 3⁄16	25K	045923085840	12/6
S8497*	15PAR38/LED/40'/40K	15	120	90	4000K	Cool White	1000	40°	5 3⁄16	25K	045923084973	12/6
S8498*	15PAR38/LED/40'/50K	15	120	90	5000K	Natural Light	1000	40°	5 3⁄16	25K	045923084980	12/6
LED PAR38 - Replaces 100W												
S9455*	18PAR38/LED/40'/3000K/120V/FL	18	120	80	3000K	Soft White	1400	40°	5 3⁄16	25K	045923094552	12/6
S9456*	18PAR38/LED/40'/4000K/120V/FL	18	120	80	4000K	Cool White	1400	40°	5 3⁄16	25K	045923094569	12/6
LED PAR38 - Non-Dimmable 2 Pack - Replaces 90W												
S9457*	15PAR38/LED/60'/3000K/120V/2Pack	15	120	80	3000K	Soft White	1150	60°	5 3⁄16	25K	045923094576	8-2Pks
LED PAR38 - Colors												
S9480	15PAR38/LED/40'/RED/120V	15	120	—	—	Red	—	40°	5 3⁄16	25K	045923094804	12/6
S9481	15PAR38/LED/40'/GREEN/120V	15	120	—	—	Green	—	40°	5 3⁄16	25K	045923094811	12/6
S9482	15PAR38/LED/40'/BLUE/120V	15	120	—	—	Blue	—	40°	5 3⁄16	25K	045923094828	12/6
S9483	15PAR38/LED/40'/AMBER/120V	15	120	—	—	Amber	—	40°	5 3⁄16	25K	045923094835	12/6
S9484	15PAR38/LED/40'/YELLOW/120V	15	120	—	—	Yellow	—	40°	5 3⁄16	25K	045923094842	12/6

■ Also T24 compliant.

Product sheet SA1393

**See warranty for details.



PAR30L
S12214, S12215



PAR38
S12216, S12217

Econo LED PAR lamps

High-value LED replacements for Halogen PAR lamps

Features

- Traditional lens
- Saves over 80% on energy costs
- 120V
- 3000K and 4000K options
- 40° Beam angle
- Approved for totally enclosed fixtures**
- Wet location - indoor/outdoor
- 3 Year limited warranty**




PAR30S
S12212, S12213




PAR20
S12210, S12211

Illumination



Beam Angle: 40°

Beam Profile



Beam Angle: 40°

** ENCLOSED FIXTURE DIMMABLE WET LOCATION c UL LISTED

BR & PAR LAMPS

Econo PAR Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Finish.	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
50 PAR20 Replacement												
S12210	6PAR20/LED/830/FL/120V	6	120	80	3000K	WHITE	500	40°	3 ⅛	11K	045923122101	24
S12211	6PAR20/LED/840/FL/120V	6	120	80	4000K	WHITE	500	40°	3 ⅛	11K	045923122118	24
75 PAR30 Replacement												
S12212	8.9PAR30S/LED/830/FL/120V	8.9	120	80	3000K	WHITE	700	40°	3 ⅜	11K	045923122125	12
S12213	8.9PAR30S/LED/840/FL/120V	8.9	120	80	4000K	WHITE	700	40°	3 ⅜	11K	045923122132	12
S12214	8.9PAR30L/LED/830/FL/120V	8.9	120	80	3000K	WHITE	700	40°	4 7⁄16	11K	045923122149	12
S12215	8.9PAR30L/LED/840/FL/120V	8.9	120	80	4000K	WHITE	700	40°	4 7⁄16	11K	045923122156	12
90 PAR38 Replacement												
S12216	13PAR38/LED/830/FL/120V	13	120	80	3000K	WHITE	1000	40°	5 ⅛	11K	045923122163	12
S12217	13PAR38/LED/840/FL/120V	13	120	80	4000K	WHITE	1000	40°	5 ⅛	11K	045923122170	12

**Average rated life may vary depending on application, use, fixture type and environment.

Product sheet SA2586

**See warranty for details.

High lumen LED PAR lamps






A high lumen, high efficiency option for all PAR38 and PAR30 long neck lamps

Features


- Direct replacement for 250W PAR38 lamps uses only 33 Watts
- Direct replacement for 75W PAR30LN lamps only 20.5 Watts
- Saves over 80% on energy costs
- 120V
- High efficiency
- 2700K, 3000K, 4000K, and 5000K options
- Approved for totally enclosed fixtures**
- Long life – 25,000 hours
- 3 Year limited warranty†



Beam Profile



Beam Angle: 40°

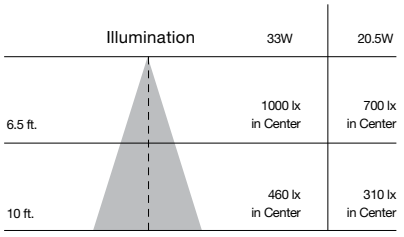

Beam Angle: 40°

DIMMABLE ** ENCLOSED FIXTURE WET LOCATION c UL us LISTED * ENERGY STAR

High Lumen PAR LED Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC
120 Volt Dimmable										
S12240	20.5PAR30LN/LED/827/HL/120V/FL/D	20.5	120V	80	2700K	1800	40°	4 7⁄16	25K	045923122408
S12241	20.5PAR30LN/LED/830/HL/120V/FL/D	20.5	120V	80	3000K	1800	40°	4 7⁄16	25K	045923122415
S12242	20.5PAR30LN/LED/840/HL/120V/FL/D	20.5	120V	80	4000K	1800	40°	4 7⁄16	25K	045923122422
S12243	20.5PAR30LN/LED/850/HL/120V/FL/D	20.5	120V	80	5000K	1800	40°	4 7⁄16	25K	045923122439
S12250*	33PAR38/LED/827/HL/120V/FL/D	33	120V	80	2700K	3000	40°	5 1⁄8	25K	045923122507
S12251*	33PAR38/LED/830/HL/120V/FL/D	33	120V	80	3000K	3000	40°	5 1⁄8	25K	045923122514
S12252*	33PAR38/LED/840/HL/120V/FL/D	33	120V	80	4000K	3000	40*	5 1⁄8	25K	045923122521
S12253*	33PAR38/LED/850/HL/120V/FL/D	33	120V	80	5000K	3000	40°	5 1⁄8	25K	045923122538
120-277 Volt Non-Dimmable										
S29764	20.5PAR30LN/930/120-277V	20.5	120-277V	90	3000K	1800	40°	4 7⁄16	25K	045923297649
S29765	20.5PAR30LN/940/120-277V	20.5	120-277V	90	4000K	1800	40°	4 7⁄16	25K	045923297656
S29760	27PAR38/930/120-277V	27	120-277V	90	3000K	2400	40°	5 3⁄16	25K	045923297601
S29761	27PAR38/940/120-277V	27	120-277V	90	4000K	2400	40°	5 3⁄16	25K	045923297618

† Average rated life may vary depending on application, use, fixture type and environment.

Product sheet SA2563

**See warranty for details.

Hi-Pro LED PAR30 lamps

High lumen, PAR lamps for industrial and commercial applications

- Replaces Halogen and ceramic metal Halide lamps
- Saves over 80% on energy costs
- Direct wire range voltage 100-277V
- High efficiency—100LPW
- 3000 and 4000K options
- Base up, base down or horizontal operation
- Long life—50,000 hours
- ENERGY STAR certified*
- 5 Year limited warranty




S9762, S9763




S9764, S9765

Beam Profile



Beam Angle: 25°

Illumination



Beam Angle : 25°

c UL us LISTED * ENERGY STAR

High Lumen PAR30 Industrial/Commercial LED Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
S9762*	12W/LED/PAR30/SN/3K/100-277V	12	100-277	83	3000K	1200	25º	3 ½	50K	045923097621	24/6
S9763*	12W/LED/PAR30/SN/4K/100-277V	12	100-277	83	4000K	1200	25º	3 ½	50K	045923097638	24/6
S9764*	12W/LED/PAR30/LN/3K/100-277V	12	100-277	83	3000K	1200	25º	4 5/16	50K	045923097645	24/6
S9765*	12W/LED/PAR30/LN/4K/100-277V	12	100-277	83	4000K	1200	25º	4 5/16	50K	045923097652	24/6
Accessories											
80-929	HARD WIRE SURGE PROTECTOR									045923809293	

Product sheet SA2039


Hi-Pro LED PAR38 lamps

High lumen, PAR lamps for industrial and commercial applications

- Replaces Halogen and ceramic metal Halide lamps
- Saves over 80% on energy costs
- Direct wire range voltage 100-277V
- High efficiency—over 100LPW
- 3000 and 4000K options
- Base up, base down or horizontal operation
- Long life—50,000 hours
- ENERGY STAR certified*
- 5 Year limited warranty




Beam Profile



Beam Angle: 25°

Illumination



Beam Angle : 25°

c UL us LISTED * ENERGY STAR

High Lumen PAR38 Industrial/Commercial LED Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
S9760*	18W/LED/PAR38/3000K/100-277V	18	100-277	83	3000K	1950	25º	5 1/16	50K	045923097607	12/6
S9761*	18W/LED/PAR38/4000K/100-277V	18	100-277	83	4000K	2000	25º	5 1/16	50K	045923097614	12/6
Accessories											
80-929	HARD WIRE SURGE PROTECTOR									045923809293	

Product sheet SA2010

See warranty for details.

LED PAR16 4.5 & 6.5W lamps

45W & 60W Halogen PAR16 lamp replacement uses only 4.5-6.5 Watts

Indoor residential and commercial lighting

Down lighting

Accent lighting

Pendant lighting

Dimmable

Damp location


Approved for totally enclosed fixtures**

Long life—25,000 hours

5 Year warranty



Beam Profile



Beam Angle: 40°

Illumination at 3000K

	4.5W	6.5W
1m	525 lx in Center	730 lx in Center
2m	130 lx in Center	185 lx in Center

Beam Angle: 40°

DIMMABLE · DAMP LOCATION · ** ENCLOSED FIXTURE · c UL us LISTED · * ENERGY STAR

LED PAR16 Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9386	4.5PAR16/LED/40'/3000K/120V	4.5	120	80	3000K	360	40°	2 ⅞	25K	045923093869	12/1
S9387	4.5PAR16/LED/40'/5000K/120V	4.5	120	80	5000K	360	40°	2 ⅞	25K	045923093876	12/1
S9388*	6.5PAR16/LED/40'/3000K/120V	6.5	120	80	3000K	500	40°	2 ⅞	25K	045923093883	12/1
S9389	6.5PAR16/LED/40'/5000K/120V	6.5	120	80	5000K	500	40°	2 ⅞	25K	045923093890	12/1
90 CRI—CEC/T20											
S8585	4PAR16/LED/40'/30K/120V	4	120	90	3000K	360	40°	2 ⅞	25K	045923085857	12/1

Product sheet SA1744

1.6W & 3W, 12V LED MR11 lamps

20 Watt MR11 replacement, uses up to 3 Watts

Indoor residential and commercial lighting

Down lighting

Accent lighting

Pendant lighting

Non-dimmable

Damp location

Approved for totally enclosed fixtures**

Long life—25,000 hours

3 Year warranty




S9280, S9281, S9282, S9283




S9550, S9551

Beam Profile



Beam Angle: 40°

Beam Profile



Beam Angle: 25°

Illumination

	2700K	3000K	4000K	5000K
1m	700 lx in Center	730 lx in Center	760 lx in Center	800 lx in Center
2m	175 lx in Center	183 lx in Center	190 lx in Center	200 lx in Center

Beam Angle: 25°

DAMP LOCATION · ** ENCLOSED FIXTURE · c UL us LISTED

1.6W & 3W, 12V LED MR11 Lamps With GU4 Base

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9280	3MR11/LED/25'/2700K/12V	3	12	80	2700K	210	25°	1 ½	25K	045923092800	12/1
S9281	3MR11/LED25'/3000K/12V	3	12	80	3000K	220	25°	1 ½	25K	045923092817	12/1
S9282	3MR11/LED/25'/4000K/12V	3	12	80	4000K	230	25°	1 ½	25K	045923092824	12/1
S9283	3MR11/LED/25'/5000K/12V	3	12	80	5000K	240	25°	1 ½	25K	045923092831	12/1
S8603	3MR11/LED/25'/3000K/12V	3	12	80	3000K	210	25°	1 ½	25K	045923086038	12/1
S9550	LED/1.6MR11/40'/3000K/12V/D	1.6	12	80	3000K	200	40°	1 ½	25K	045923095504	20/1
S9551	LED/1.6MR11/40'/5000K/12V/D	1.6	12	80	5000K	200	40°	1 ½	25K	045923095511	20/1

Product sheet SA1679

**See warranty for details.

LED MR16 lamps

- Down lighting
- Accent lighting
- Pendant lighting
- Dimmable
- Approved for totally enclosed fixtures**
- Long life—25,000 hours
- ENERGY STAR certified*
- 3 Year warranty



3MR16



6.5W MR16



8W MR16

LED MR16 Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9552	LED/3MR16/40'/3000K/12V/D	3	12	80	3000K	330	40°	2	25K	045923095528	20/1
S9553	LED/3MR16/40'/5000K/12V/D	3	12	80	5000K	330	40°	2	25K	045923095535	20/1
80 CRI - 50W Replacement - CEC/T20											
S9490*	6.5MR16/LED/25'/27K/12V	6.5	12	80	2700K	500	25°	1 ¾	25K	045923094903	12/1
S9491*	6.5MR16/LED/25'/30K/12V	6.5	12	80	3000K	500	25°	1 ¾	25K	045923094910	12/1
S9492	6.5MR16/LED/25'/35K/12V	6.5	12	80	3500K	500	25°	1 ¾	25K	045923094927	12/1
S9493	6.5MR16/LED/25'/40K/12V	6.5	12	80	4000K	500	25°	1 ¾	25K	045923094934	12/1
S9494	6.5MR16/LED/25'/50K/12V	6.5	12	80	5000K	500	25°	1 ¾	25K	045923094941	12/1
S9495*	6.5MR16/LED/40'/27K/12V	6.5	12	80	2700K	500	40°	1 ¾	25K	045923094958	12/1
S9496*	6.5MR16/LED/40'/30K/12V	6.5	12	80	3000K	500	40°	1 ¾	25K	045923094965	12/1
S9497*	6.5MR16/LED/40'/35K/12V	6.5	12	80	3500K	500	40°	1 ¾	25K	045923094972	12/1
S9498*	6.5MR16/LED/40'/40K/12V	6.5	12	80	4000K	500	40°	1 ¾	25K	045923094989	12/1
S9499*	6.5MR16/LED/40'/50K/12V	6.5	12	80	5000K	500	40°	1 ¾	25K	045923094996	12/1
90 CRI											
S11334■	6.5MR16/LED/25'/927/12V	6.5	12	90	2700K	450	25°	1 ¾	25K	045923113345	48/12
S11335■	6.5MR16/LED/25'/930/12V	6.5	12	90	3000K	450	25°	1 ¾	25K	045923113352	48/12
S11336■	6.5MR16/LED/40'/927/12V	6.5	12	90	2700K	450	40°	1 ¾	25K	045923113369	48/12
S9616*■	6.5MR16/LED/40'/930/12V	6.5	12	90	3000K	450	40°	1 ¾	25K	045923096167	48/12
Single Optic - 75W Replacement - CEC/T20											
S8635	8MR16/LED/15'/27K/90CRI/12V	8	12	90	2700K	490	15°	1 ⅞	25K	045923086359	12/1
S8636	8MR16/LED/15'/30K/90CRI/12V	8	12	90	3000K	490	15°	1 ⅞	25K	045923086366	12/1
S8637	8MR16/LED/15'/35K/90CRI/12V	8	12	90	3500K	490	15°	1 ⅞	25K	045923086373	12/1
S8638	8MR16/LED/15'/40K/90CRI/12V	8	12	90	4000K	490	15°	1 ⅞	25K	045923086380	12/1
S8639	8MR16/LED/15'/50K/90CRI/12V	8	12	90	5000K	490	15°	1 ⅞	25K	045923086397	12/1
S8640*	8MR16/LED/40'/27K/90CRI/12V	8	12	90	2700K	490	40°	1 ⅞	25K	045923086403	12/1
S8641*	8MR16/LED/40'/30K/90CRI/12V	8	12	90	3000K	490	40°	1 ⅞	25K	045923086410	12/1
S8642	8MR16/LED/40'/35K/90CRI/12V	8	12	90	3500K	490	40°	1 ⅞	25K	045923086427	12/1
S8643	8MR16/LED/40'/40K/90CRI/12V	8	12	90	4000K	490	40°	1 ⅞	25K	045923086434	12/1
S8644	8MR16/LED/40'/50K/90CRI/12V	8	12	90	5000K	490	40°	1 ⅞	25K	045923086441	12/1

All 12V MR16 lamps are compatible with electronic and magnetic transformers. Visit www.satco.com for compatibility information and warranty details.
■ Also T24 compliant.

Product sheet SA1902

**See warranty for details.

MR16 GU10 base LED lamps

Applications

- Indoor residential and commercial lighting
- Down lighting
- Accent lighting
- Pendant lighting


Features

- Direct replacement for Halogen lamps
- 4.5W = 35 Watts
- 6.5W = 50 Watts – 25° (new) and 40°
- Dimmable
- Damp location
- Approved for enclosed fixtures**
- Long life - 25,000 hours
- High efficiency / environmentally friendly
- Innovative design
- No UV or IR radiation
- 5 year warranty / 10 hrs per day





Beam Profile




Beam Angle: 40°

Illumination	4.5W	6.5W
3.25 ft.	565 lx in Center	760 lx in Center
6.5 ft.	141 lx in Center	190 lx in Center

Beam Angle : 40°

Beam Profile



Beam Angle: 25°

Illumination	6.5W
3.25 ft.	475 lx in Center
6.5 ft.	118 lx in Center

Beam Angle : 25°

MR16 GU10 LED Lamps

DIMMABLE ** ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED * ENERGY STAR

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC
S9380*	4.5MR16/LED/40'/30K/120V/GU10	4.5	120	80	3000K	360	40°	2 3/16	25K	045923093807
S9381	4.5MR16/LED/40'/50K/120V/GU10	4.5	120	80	5000K	360	40°	2 3/16	25K	045923093814
S8676	6.5MR16/LED/25'/27K/120V/GU10	6.5	120	80	2700K	500	25°	2 9/32	25K	045923086762
S8677	6.5MR16/LED/25'/30K/120V/GU10	6.5	120	80	3000K	500	25°	2 9/32	25K	045923086779
S8678	6.5MR16/LED/25'/40K/120V/GU10	6.5	120	80	4000K	500	25°	2 9/32	25K	045923086786
S8679	6.5MR16/LED/25'/50K/120V/GU10	6.5	120	80	5000K	500	25°	2 9/32	25K	045923086793
S9382	6.5MR16/LED/40'/27K/120V/GU10	6.5	120	80	2700K	500	40°	2 3/16	25K	045923093821
S9383*	6.5MR16/LED/40'/30K/120V/GU10	6.5	120	80	3000K	500	40°	2 3/16	25K	045923093838
S9384	6.5MR16/LED/40'/40K/120V/GU10	6.5	120	80	4000K	500	40°	2 3/16	25K	045923093845
S9385*	6.5MR16/LED/40'/50K/120V/GU10	6.5	120	80	5000K	500	40°	2 3/16	25K	045923093852
S8603	3MR11/LED/25'/3000K/12V	3	12	80	3000K	210	25°	1 1/2	25K	045923086038
90 CRI—CEC/T20										
S8588	6.5MR16/LED/40'/27K/120V/GU10	6.5	120	90+	2700K	450	40°	2 3/16	25K	045923085888
S8589*	6.5MR16/LED/40'/30K/120V/GU10	6.5	120	90+	3000K	450	40°	2 3/16	25K	045923085895

Pack Master 12/1

Product sheet SA1729

**See warranty for details.







Carded LED MR lamps

Applications

- Indoor residential and commercial lighting
- Down lighting
- Accent lighting
- Pendant lighting

Features

- Direct replacement for Halogen lamps
  50W MR16
  20W MR11
- Dimmable
- Damp location
- Approved for totally enclosed fixtures**
- Long life - 25,000 hours
- 3 Year warranty







DIMMABLE ** ENCLOSED FIXTURE DAMP LOCATION * ENERGY STAR

LED MR Lamps - Carded

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	Life/ Hrs.	UPC	Pack
S21741†	2MR11/LED/3K/36°/12V/ND/2CD	2	12	80	3000K	100	36°	15K	045923217418	12/2
S8603	3MR11/LED/3K/25°/12V/1CD	3	12	80	3000K	210	25°	25K	045923086038	12/1
S8604*	6.5MR16/LED/3K/40°/120V/GU10/1CD	6.5	120	80	3000K	500	40°	25K	045923086045	12/1
S8605*	6.5MR16/LED/3K/40°/12V/1CD	6.5	12	80	3000K	500	40°	25K	045923086052	12/1
S21742*	7MR16/LED/3K/40°/12V/2CD	7	12	80	3000K	600	40°	25K	045923217425	12/2
S21743*	6.5MR16/LED/3K/40°/GU10/2CD	6.5	120	80	3000K	500	40°	25K	045923217432	12/2

†Non-dimmable

Product sheet SA2674

**See warranty for details.

LED MR16 E26 base lamps




Applications

- Indoor residential and commercial lighting
- Downlighting
- Accent lighting
- Pendant lighting

Features

- Direct replacement for 50 Watt
- Halogen lamps — uses only 6.5 Watts
- Innovative design
- Dimmable
- Damp location
- Approved for enclosed fixtures**
- Long life - 25,000 hours
- No UV or IR radiation
- 3 year warranty


Beam Profile



Beam Angle: 40°



ILLUMINATION 6.5W
CCT 5000K / Beam Angle: 40°



DIMMABLE ** ENCLOSED FIXTURE DAMP LOCATION c UL us LISTED

LED MR16 E26 Base Lamps

Item No.	Description	W	V	CCT	Lm	CRI	Life/ Hrs.	Beam Angle	UPC
S9980	6.5MR16/E26/LED/40'/27K/120V	6.5	120V	2700K	500	80	25K	40	045923099809
S9981	6.5MR16/E26/LED/40'/30K/120V	6.5	120V	3000K	500	80	25K	40	045923099816
S9982	6.5MR16/E26/LED/40'/40K/120V	6.5	120V	4000K	500	80	25K	40	045923099823
S9983	6.5MR16/E26/LED/40'/50K/120V	6.5	120V	5000K	500	80	25K	40	045923099830

Product sheet SA2556

LED elevator lamps

- Elevator lighting
- Display lighting
- Non dimmable
- Long life—30,000 hours
- 3 Year warranty

Not for use with dimmers.
Recommended for use with magnetic transformers.
Compatibility with electronic transformers minimum load requirement must be verified.



S9005



S9004

LED Elevator Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9005	2W/GBF/LED/12V/BA15D	2	12	80	3000K	120	40°	1 ¾	30K	045923090059	48/12
S9004	3W/1383/LED/12V/BA15S	3	12	80	3000K	120	40°	2 ½	30K	045923090042	48/12
Indoor use only. Not for use in totally enclosed fixtures.											

Product sheet SA1175

**See warranty for details.

Silicon LED replacements for Halogen G4, G6.35, G8 and G9 lamps

- Solid state LED lighting
- High efficacy
- Omni-directional light
- Dimmable
- Long life—25,000 hours
- Approved for enclosed fixtures*



S8600, S9542, S9543
G4



S8601, S9544, S9545
G6.35



S28680, S28681
G8



S9546, S9547
G9




S28602, S29548, S29549, S29697
G9



S28682, S28683
G9

Beam Profile



Beam Angle: 360°

Silicon LED Replacements for Halogen G4, G6.35, G8 & G9 Lamps

DAMP LOCATION · DIMMABLE · ** ENCLOSED FIXTURE

Item Number	Lamp Description	W	V	Finish	Base	CRI	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
G4 Bi-Pin												
S9542	LED/1.6W/JC/G4/12V/3000K/200L/360°	1.6	12	Clear	G4	80	3000K	200	1 7⁄16	25K	045923095429	20/1
S8600	LED/1.6W/JC/G4/12V/3K/CARDED	1.6	12	Clear	G4	80	3000K	200	1 7⁄16	25K	045923086007	12/1
S9543	LED/1.6W/JC/G4/12V/5000K/200L/360°	1.6	12	Clear	G4	80	5000K	200	1 7⁄16	25K	045923095436	20/1
G6.35												
S9544	LED/3W/JC/G6.35/12V/3000K/300L/360°	3	12	Clear	G6.35	80	3000K	300	1 5⁄8	25K	045923095443	20/1
S8601	LED/3W/JC/G6.35/12V/3K/CARDED	3	12	Clear	G6.35	80	3000K	300	1 5⁄8	25K	045923086014	12/1
S9545	LED/3W/JC/G6.35/12V/5000K/300L/360°	3	12	Clear	G6.35	80	5000K	300	1 5⁄8	25K	045923095450	20/1
G8												
S28680	LED/4W/JC/G8/CL/3K/120V	4	120-130	Clear	G8	80	3000K	480	2	25K	045923286803	20/1
S28681	LED/4W/JC/G8/CL/5K/120V	4	120-130	Clear	G8	80	5000K	480	2	25K	045923286810	20/1
G9												
S9546	LED/1.6W/JCD/G9/120V/3000K	1.6	120	Clear	G9	80	3000K	200	1 7⁄8	25K	045923095467	20/1
S9547	LED/1.6W/JCD/G9/120V/5000K	1.6	120	Clear	G9	80	5000K	200	1 7⁄8	25K	045923095474	20/1
S29548	LED/4W/JCD/G9/120V/3000K	4	120-130	Clear	G9	80	3000K	480	2 7⁄16	25K	045923295485	20/1
S28602	LED/4W/JCD/G9/120V/3K/CARDED	4	120-130	Clear	G9	80	3000K	480	2 7⁄16	25K	045923286025	12/1
S28682	LED/4W/JCD/G9/FR/3000K/120V	4	120-130	Frost	G9	80	3000K	460	2 7⁄16	25K	045923286827	20/1
S29549	LED/4W/JCD/G9/CL/120V/5000K	4	120-130	Clear	G9	80	5000K	480	2 7⁄16	25K	045923295492	20/1
S28683	LED/4W/JCD/G9/FR/5000K/120V	4	120-130	Frost	G9	80	5000K	460	2 7⁄16	25K	045923286834	20/1
S29697	LED/4W/JCD/G9/120V/3K/90CRI	4	120-130	Clear	G9	90	3000K	360	2 7⁄16	25K	045923296970	20/1

*Visit satco.com for use information.

Product sheet SA2229

**See warranty for details.

Silicon LED replacements for Halogen E11, E12, BA15D, and BA15S lamps

- Solid state LED lighting
- High efficacy
- Omni-directional light
- E11—Mini Can
- Dimmable
- Long life—25,000 hours



S28684, S28685
E11 Mini Can



S28686, S28687
E11 Mini Can



S11210, S11211
E12



S11212, S11213
E12



S11214, S11215
BA15D




S11216, S11217
BA15D



S8688, S8689
BA15S

Beam Profile



Beam Angle: 360°

Silicon LED Replacements for Halogen E12 and BA15D Lamps

Item Number	Lamp Description	W	V	Finish	Base	CRI	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
E11 Mini Can												
S28684	LED/4W/E11/MC/CL/3K/120V	4	120-130	Clear	E11	80	3000K	480	2 5⁄16	25K	045923286841	20/1
S28685	LED/4W/E11/MC/CL/5K/120V	4	120-130	Clear	E11	80	5000K	480	2 5⁄16	25K	045923286858	20/1
S28686	LED/4W/E11/MC/FR/3K/120V	4	120-130	Frost	E11	80	3000K	460	2 5⁄16	25K	045923286865	20/1
S28687	LED/4W/E11/MC/FR/5K/120V	4	120-130	Frost	E11	80	5000K	460	2 5⁄16	25K	045923286872	20/1
E12												
S11210	LED/4W/E12/CL/3K	4	120-130	Clear	E12	80	3000K	480	½	25K	045923112102	20/1
S11211	LED/4W/E12/CL/5K	4	120-130	Clear	E12	80	5000K	480	½	25K	045923112119	20/1
S11212	LED/4W/E12/FR/3K	4	120-130	Frost	E12	80	3000K	460	½	25K	045923112126	20/1
S11213	LED/4W/E12/FR/5K	4	120-130	Frost	E12	80	5000K	460	½	25K	045923112133	20/1
BA15D												
S11214	LED/4W/BA15D/CL/3K	4	120-130	Clear	BA15D	80	3000K	480	2 ½	25K	045923112140	20/1
S11215	LED/4W/BA15D/CL/5K	4	120-130	Clear	BA15D	80	5000K	480	2 ½	25K	045923112157	20/1
S11216	LED/4W/BA15D/FR/3K	4	120-130	Frost	BA15D	80	3000K	460	2 ½	25K	045923112164	20/1
S11217	LED/4W/BA15D/FR/5K	4	120-130	Frost	BA15D	80	5000K	460	2 ½	25K	045923112171	20/1
BA15S												
S8688	LED/3W/BA15S/CL/3K/12V	3	12	Clear	BA15S	80	3000K	330	1 ⅜	25K	045923086885	20/1
S8689	LED/3W/BA15S/CL/5K/12V	3	12	Clear	BA15S	80	5000K	330	1 9⁄16	25K	045923086892	20/1

Product sheet SA2562

**See warranty for details.

4", 5/6" LED recessed downlight retrofits with selectable color temperature settings



S11801



S11800

Applications

- Residential
- Office
- Retail
- Hospitality

Features


- Selectable CCT can be set to 2700K, 3000K, 3500K, 4000K or 5000K
- Direct replacement for 50W and 65W reflector lamps - uses only 7W and 9W
- Dimmable
- Long life—50,000 hours
- Wet location - Baffle trims
- Damp location - Gimbal
- 5 Year warranty
- c-UL-us wet location listed
- ENERGY STAR® certified*

ColorQuick™
Selectable CCT Technology



Color changeable - 5 color temperature settings


Beam Profile



Beam Angle: 90°



Illumination



Beam Angle: 90°

E26 Adapter included  (S9001)
GU10 Adapter sold separately (S9000)
GU24 Adapter sold separately (8999)

DIMMABLE | DAMP LOCATION Gimbal | WET LOCATION Baffle | CCT | c UL us LISTED | * ENERGY STAR

4", 5/6" LED Recessed Downlight Retrofits with Selectable Color Temperature

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
Round											
S11800	7WLED/RDL/4/ADJ-CCT/120V / 4 INCH	7	120	90	27K,30K,35K,40K,50K	600	90°	2 ⅞	50K	045923118005	16/1
S11801	9WLED/RDL/5-6/ADJ-CCT/120V / 5-6 INCH	9	120	90	27K,30K,35K,40K,50K	800	90°	3 ⅓	50K	045923118012	8/1
S11825	13.5WLED/RDL/5-6/CCT-SEL	13.5	120	90	27K,30K,35K,40K,50K	1200	90°	3 ¼	50K	045923118258	8/1
Square											
S11820	6.5WLED/RDL/SQ/4/CCT-SEL	6.5	120	90	27K,30K,35K,40K,50K	600	90°	2 ¾	50K	045923118203	24/1
S11821	11.5WLED/RDL/SQ/5-6/CCT-SEL	11.5	120	90	27K,30K,35K,40K,50K	1000	90°	3 ¼	50K	045923118210	12/1
Gimbal											
S11822	7.5WLED/DIR/4/60'/CCT-SEL	7.5	120	90	27K,30K,35K,40K,50K	600	60°	3 ½	50K	045923118227	8/1
S11824	10.5WLED/DIR/5-6/90'/CCT-SEL	10.5	120	90	27K,30K,35K,40K,50K	800	90°	3 ⅞	50K	045923118241	8/1

Product sheet SA2632

See warranty for details.

4" LED recessed downlight retrofits

- Residential
- Office
- Retail
- Hospitality
- Solid state LED lighting
- Direct replacement for reflector lamps
- Dimmable
- c-UL-us Classified damp location - Gimbal
- c-UL-us Classified wet location - Baffle
- JA8-2016
- CEC/T20 Compliant
- Long life—50,000 hours
- ENERGY STAR® certified*
- 5 Year warranty



4" Downlight Gimbal



4" Downlight Baffle

E26 Adapter included (S9001)
GU10 Adapter sold separately (S9000)

4" LED Recessed Downlight Retrofits

DIMMABLE | DAMP LOCATION (Gimbal) | WET LOCATION (Baffle) | * ENERGY STAR

Item Number	Lamp Description	Finish	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
4" LED Baffle Retrofits												
S39713*■	7WLED/RDL/4/27K/120V	White	7	120	90	2700K	600	90°	2 ⅞	50K	045923397134	16/1
S39714*■	7WLED/RDL/4/30K/120V	White	7	120	90	3000K	600	90°	2 ⅞	50K	045923397141	16/1
S39715■	7WLED/RDL/4/40K/120V	White	7	120	90	4000K	600	90°	2 ⅞	50K	045923397158	16/1
S39716*	7WLED/RDL/4/50K/120V	White	7	120	90	5000K	600	90°	2 ⅞	50K	045923397165	16/1
S39744*	8.5WLED/RDL/4/30K/BN/120V	Brushed Nickel	8.5	120	90	3000K	600	90°	2 ⅞	50K	045923397448	16/1
S39847*	8.5WLED/RDL/4/30K/BRZ/120V	Bronze	8.5	120	90	3000K	520	90°	2 ⅞	50K	045923398476	16/1
4" LED Gimbal Retrofits												
S39463*■	7WLED/DIR/4/40'/27K/120V	White	7	120	90	2700K	600	40°	3 5⁄16	50K	045923294631	8/1
S39464*■	7WLED/DIR/4/40'/30K/120V	White	7	120	90	3000K	600	40°	3 5⁄16	50K	045923294648	8/1
S39465*■	7WLED/DIR/4/40'/40K/120V	White	7	120	90	4000K	600	40°	3 5⁄16	50K	045923294655	8/1
S39466*■	7WLED/DIR/4/90'/27K/120V	White	7	120	90	2700K	600	90°	3 5⁄16	50K	045923294662	8/1
S39467*■	7WLED/DIR/4/90'/30K/120V	White	7	120	90	3000K	600	90°	3 5⁄16	50K	045923294679	8/1
S39468*■	7WLED/DIR/4/90'/40K/120V	White	7	120	90	4000K	600	90°	3 5⁄16	50K	045923294686	8/1


■ Also T24 compliant.

Product sheet SA2602

See warranty for details.


5"/6" LED recessed downlight retrofits

- Residential • Office • Retail • Hospitality
- Solid state LED lighting
- Direct replacement for reflector lamps
- Dimmable
- High efficiency/Environmentally friendly
- c-UL-us Classified
- Damp location - Gimbal
- c-UL-us Classified
- Wet location - Baffle
- JA8-2016
- CEC/T20 Compliant
- Long life—50,000 hours
- ENERGY STAR® certified*
- 5 Year warranty

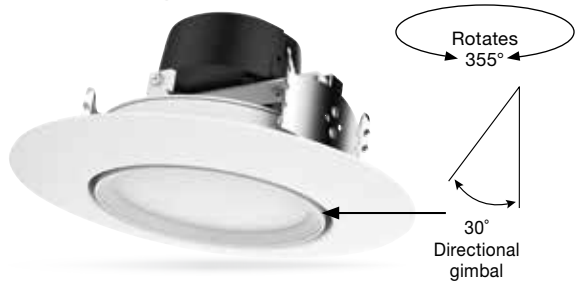


5"/6" Downlight Gimbal

Beam Profile



Beam Angle: 90°

Illumination




Beam Angle: 90°




5"/6" Downlight Baffle

Beam Profile




Beam Angle: 90°

Illumination



Beam Angle: 90°

E26 Adapter included (S9001)
GU24 Adapter sold separately (S8999)
GU10 Adapter sold separately (S9000)



Pressure bracket (80-2676)
alternate installation option available.



Torsion springs (80/2709)

DIMMABLE | DAMP LOCATION | WET LOCATION * ENERGY STAR

Gimbal | Baffle

5"/6" LED Recessed Downlight Retrofits

Item Number	Lamp Description	Finish	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
5"/6" LED Baffle Retrofits												
S39724*■	9WLED/RDL/5-6/27K/120V	White	9	120	90	2700K	800	90°	3 7⁄16	50K	045923397240	8/1
S39725*■	9WLED/RDL/5-6/30K/120V	White	9	120	90	3000K	800	90°	3 7⁄16	50K	045923397257	8/1
S39726*■	9WLED/RDL/5-6/40K/120V	White	9	120	90	4000K	800	90°	3 7⁄16	50K	045923397264	8/1
S39727*	9WLED/RDL/5-6/50K/120V	White	9	120	90	5000K	800	90	3 7⁄16	50K	045923397271	6/1
S39745*	10.5WLED/RDL/5-6/30K/BN/120V	Brushed Nickel	10.5	120	90	3000K	800	90°	3 7⁄16	50K	045923397455	8/1
S39848*	10.5WLED/RDL/5-6/30K/BRZ/120V	Bronze	10.5	120	90	3000K	700	90°	3 7⁄16	50K	045923398483	8/1
5"/6" LED Baffle Retrofits - High Lumen												
S39740*■	13.5WLED/RDL/5-6/27K/120V	White	13.5	120	90	2700K	1200	90°	3 7⁄16	50K	045923397400	8/1
S39741*■	13.5WLED/RDL/5-6/30K/120V	White	13.5	120	90	3000K	1200	90°	3 7⁄16	50K	045923397417	8/1
S39742*■	13.5WLED/RDL/5-6/40K/120V	White	13.5	120	90	4000K	1200	90°	3 7⁄16	50K	045923397424	8/1
S39743*	13.5WLED/RDL/5-6/50K/120V	White	13.5	120	90	5000K	1200	90°	3 7⁄16	50K	045923397431	8/1
5"/6" LED Gimbal Retrofits												
S39472*■	9WLED/DIR/5-6/27K/120V	White	9	120	90	2700K	800	90°	4 ¼	50K	045923394720	8/1
S39473*■	9WLED/DIR/5-6/30K/120V	White	9	120	90	3000K	800	90°	4 ¼	50K	045923394737	8/1
S39474*■	9WLED/DIR/5-6/40K/120V	White	9	120	90	4000K	800	90°	4 ¼	50K	045923394744	8/1

■ Also T24 compliant.

Product sheet SA2603

See warranty for details.

5"/6" LED recessed downlight retrofits

- Residential
- Office
- Retail
- Hospitality
- Direct replacement for reflector lamps
- High efficiency/environmentally friendly
- Dimmable***
- Wet location
- c-UL-us Classified
- Long life—35,000 hours
- ENERGY STAR® certified*
- 5 Year warranty




E26 Adapter included

This retrofit is for use with recessed housings with an E26 socket only.







5"/6" LED Recessed Downlight Retrofits

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
S29312*	9.8WLED/RDL/5-6/27K/120V	9.8	120	90	2700K	650	90°	2 5⁄16	35K	045923293122	12/1
S29313*	9.8WLED/RDL/5-6/30K/120V	9.8	120	90	3000K	650	90°	2 5⁄16	35K	045923293139	12/1
S29314*	9.8WLED/RDL/5-6/40K/120V	9.8	120	90	4000K	650	90°	2 5⁄16	35K	045923293146	12/1
S29315*	9.8WLED/RDL/5-6/50K/120V	9.8	120	90	5000K	650	90°	2 5⁄16	35K	045923293153	12/1

*** Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

Product sheet SA2013

See warranty for details.

12V LED recessed downlight retrofits

- Residential • Office • Retail • Hospitality
- Dimmable
- Wet location listed
- Works with magnetic and electronic 12V transformers
- Long life—35,000 hours
- 5 Year warranty



Bi-Pin Adapter included



DIMMABLE WET LOCATION

12V LED Recessed Downlight Retrofits

Item Number	Lamp Description	W	V	Base	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9729	7.5WLED/RDL/4"BFL/12V 90CRI 3K	7.5	12	GU5.3	90	3000K	460	90°	2 ⅞	35K	045923097294	12/1

Product sheet SA1174

Quick Trim™ 4", 5"/6" LED recessed downlight retrofit 2-Pks

Innovative design–adjustable neck makes installation into any recessed can easy


- Residential
- Office
- Retail
- Hospitality
- Direct replacement for reflector lamps
- Dimmable***
- Damp location listed
- Long life—25,000 hours
- ENERGY STAR® certified*
- 5 Year warranty





Extends to reach the socket.
Retracts to meet the surface.

Beam Profile



Beam Angle: 115°

Illumination	4"	5"-6"
1m	340 lx in Center	420 lx in Center
2m	85 lx in Center	100 lx in Center

Beam Angle: 115°



Step 1



Screw lamp into existing socket.

Step 2



Push into the fixture until the trim is flush against surface.

DIMMABLE DAMP LOCATION * ENERGY STAR

LED Recessed Downlight Retrofit 2-Pks

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9598*	8.5WLED/4"TRIM/27K/120V/2P	8.5	120	80	2700K	510	115°	3 13/16 - 5 3/8	25K	045923095986	12-2Pks
S9599*	12WLED/5-6"TRIM/27K/120V/2P	12	120	80	2700K	800	110°	4 ½ - 6 5/16	25K	045923095993	12-2Pks

*** Consult Satco or visit www.satco.com for an up to date dimmer compatibility list.

Product sheet SA1965


See warranty for details.

4" LED square trim recessed downlight retrofits

- 45 Watt replacement uses only 9 Watts
- Direct replacement for reflector lamps
- Residential
- Office
- Retail
- Hospitality
- Durable die-cast finish
- Dimmable***
- Wet location
- c-UL-us Classified
- JA8-2016
- CEC/T20 Compliant
- Long life—50,000 hours
- ENERGY STAR® certified*
- 5 Year warranty







E26 Adapter included  (S9001)
GU24 Adapter sold separately (S8999)
GU10 Adapter sold separately (S9000)
Fits in round cans

4" LED Square Trim Recessed Downlight Retrofits

DIMMABLE · WET LOCATION · * ENERGY STAR

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S39756*■	7WLED/4/SQ/27K/120V	7	120	90	2700K	600	90°	4	50K	045923397561	24/1
S39757*■	7WLED/4/SQ/30K/120V	7	120	90	3000K	600	90°	4	50K	045923397578	24/1
S39758*■	7WLED/4/SQ/40K/120V	7	120	90	4000K	600	90°	4	50K	045923397585	24/1
S39759	7WLED/4/SQ/50K/120V	7	120	90	5000K	600	90°	4	50K	045923397592	24/1

*** Consult Satco or visit www.satco.com for an up to date dimmer compatibility list. ■ Also T24 compliant.

Product sheet SA2047


See warranty for details.

5"/6" LED square trim recessed downlight retrofits

- Up to 85 Watt replacement uses only 15 Watts
- Direct replacement for reflector lamps
- Residential
- Office
- Retail
- Hospitality
- Durable die-cast finish
- Dimmable***
- Wet location
- c-UL-us Classified
- JA8-2016
- CEC/T20 Compliant
- Long life—50,000 hours
- ENERGY STAR® certified*
- 5 Year warranty







E26 Adapter included (S9001)
GU24 Adapter sold separately (S8999)
GU10 Adapter sold separately (S9000)
Fits in round cans

5"/6" LED Square Trim Recessed Downlight Retrofits

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S39770*■	11.5WLED/5-6/SQ/27K/120V	11.5	120	90	2700K	1000	90°	5-6	50K	045923397707	12/1
S39771*■	11.5WLED/5-6/SQ/30K/120V	11.5	120	90	3000K	1000	90°	5-6	50K	045923397714	12/1
S39772*■	11.5WLED/5-6/SQ/40K/120V	11.5	120	90	4000K	1000	90°	5-6	50K	045923397721	12/1
S39773*	11.5WLED/5-6/SQ/50K/120V	11.5	120	90	5000K	1000	90°	5-6	50K	045923397738	12/1

*** Consult Satco or visit www.satco.com for an up to date dimmer compatibility list. ■ Also T24 compliant.

Product sheet SA2048

See warranty for details.

Hi-Pro LED lamps

Third generation, high lumen, omni-directional lamps for industrial and commercial applications

Upgraded Features

- Improved heat sink design with advanced passive heat dissipation
- Reduced size / lighter weight
- Higher efficiency, increased lumen output
- Built-in surge protection on all items
  18W – 22W 2.5KV
  36W – 54W 4KV
  80W – 120W 6KV

Standard Features

- Replaces HID, CFL, and Incandescent
- Direct wire range voltage 100-277V
- Approved for totally enclosed fixtures**
- IP64-Damp location
- 3 CCT options
- High bay/low bay/post top • DLC listed*
- Long life — 50,000 hours • 5 Year limited warranty**



S39390 18W | S39392 36W | S39394 54W | S39397 120W

High Lumen Industrial/Commercial LED Lamps

DAMP LOCATION ** ENCLOSED FIXTURE c UL us LISTED CLASSIFIED c UL us * DLC

Item Number	Lamp Description	Replaces Inc/CFL/HID	W	V	Base Type	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Mstr.
S39670	18W/LED/HID/2700K/100-277V/E26	120/32/70	18	100-277	E26	2700K	2340	5 11/16	50K	045923306709	24
S39390	18W/LED/HID/5000K/100-277V/E26	120/32/70	18	100-277	E26	5000K	2610	5 11/16	50K	045923303906	24
S39671	22W/LED/HID/2700K/100-277V/E26	150/40/100	22	100-277	E26	2700K	2860	5 15/16	50K	045923306716	24
S39391	22W/LED/HID/5000K/100-277V/E26	150/40/100	22	100-277	E26	5000K	3080	5 15/16	50K	045923303913	24
S39672	36W/LED/HID/2700K/100-277V/E26	200/55/150	36	100-277	E26	2700K	4680	7 3/8	50K	045923306723	12
S39392	36W/LED/HID/5000K/100-277V/E26	200/55/150	36	100-277	E26	5000K	5148	7 3/8	50K	045923303920	12
S39738	45W/LED/HID/4000K/100-277V E26	300/65/175	45	100-277	E26	4000K	6300	8 1/2	50K	045923397387	12
S39739	45W/LED/HID/5000K/100-277V E26	300/65/175	45	100-277	E26	5000K	6435	8 1/2	50K	045923397394	12
S39673*	45W/LED/HID/4000K/100-277V/EX39	300/65/175	45	100-277	EX39	4000K	6300	8 13/16	50K	045923306730	12
S39393*	45W/LED/HID/5000K/100-277V/EX39	300/65/175	45	100-277	EX39	5000K	6435	8 13/16	50K	045923303937	12
S39674*	54W/LED/HID/4000K/100-277V/EX39	300/85/250	54	100-277	EX39	4000K	7560	9	50K	045923306747	12
S39394*	54W/LED/HID/5000K/100-277V/EX39	300/85/250	54	100-277	EX39	5000K	7722	9	50K	045923303944	12
S39675*	80W/LED/HID/4000K/100-277V/EX39	400/100/320	80	100-277	EX39	4000K	11200	8 3/4	50K	045923306754	4
S39395*	80W/LED/HID/5000K/100-277V/EX39	400/100/320	80	100-277	EX39	5000K	11440	8 3/4	50K	045923303951	4
S39676*	100W/LED/HID/4000K/100-277V/EX39	500/150/400	100	100-277	EX39	4000K	14000	9 3/4	50K	045923306761	4
S39396*	100W/LED/HID/5000K/100-277V/EX39	500/150/400	100	100-277	EX39	5000K	14300	9 3/4	50K	045923303968	4
S39677*	120W/LED/HID/4000K/100-277V/EX39	750/200/600	120	100-277	EX39	4000K	16800	10 3/8	50K	045923306778	4
S39397*	120W/LED/HID/5000K/100-277V/EX39	750/200/600	120	100-277	EX39	5000K	17160	10 3/8	50K	045923303975	4
Accessories											
92-406	Mog to Med Socket Reducer for S39390, S39391, S39392, S39670, S39671 and S39672									045923924064	
80-929	Hard Wire Surge Protector									045923809293	

** For minimum compartment size of enclosed fixture visit www.satco.com. Lamp life may vary depending on application and use. See warranty for details.

Product sheet SA2320

**See warranty for details.

Hi-Pro 277-347V high lumen LED lamps

High lumen, omni-directional lamps for industrial and commercial applications

- Replaces HID, CFL, and Incandescent
- Direct wire range voltage 277-347V
- Built-in surge protection 80-120W
- Approved for totally enclosed fixtures**
- IP65 rated
- 5000K
- Beam angle 300°
- CRI 80+
- High bay/low bay/post top
- DLC listed*
- 5 Year limited warranty

Stocked in Canada only.



S28710, S28711 S28712 | S28713, S28714 | S28715, S28716 | S28717

High Lumen Industrial/Commercial 277-347V LED Lamps

Item Number	Lamp Description	Replaces Inc/CFL/HID	W	V	Base Type	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Mstr.
S28710	18W/LED/HID/5000K/277-347V/E26	120/32/70	18	277-347	E26	5000K	2400	6 ¾	40K	045923287107	48
S28711	22W/LED/HID/5000K/277-347V/E26	150/40/100	22	277-347	E26	5000K	2950	6 9⁄16	40K	045923287114	48
S28712	36W/LED/HID/5000K/277-347V/E26	200/55/150	36	277-347	E26	5000K	4800	9 3⁄16	40K	045923287121	12
S28713*	45W/LED/HID/5000K/277-347V/EX39	300/65/175	45	277-347	EX39	5000K	6000	10 11⁄16	40K	045923287138	12
S28714*	54W/LED/HID/5000K/277-347V/EX39	300/85/250	54	277-347	EX39	5000K	7200	10 11⁄16	40K	045923287145	12
S28715*	80W/LED/HID/5000K/277-347V/EX39	400/100/320	80	277-347	EX39	5000K	10640	9 ¼	40K	045923287152	4
S28716*	100W/LED/HID/5000K/277-347V/EX39	500/150/400	100	277-347	EX39	5000K	13300	9 ⅝	40K	045923287169	4
S28717*	120W/LED/HID/5000K/277-347V/EX39	750/200/600	120	277-347	EX39	5000K	16000	10 ⅜	40K	045923287176	4
Accessories											
92-410	Mog to Med Socket Reducer									045923924064	
80-935	Hard Wire Surge Protector									045923809354	

** For minimum compartment size of enclosed fixture visit www.satco.com. Lamp life may vary depending on application and use.

Product sheet SA2308

**See warranty for details.

Hi-Pro LED 12-24V low voltage lamps

Low voltage, high lumen, omni-directional lamps for industrial and commercial applications

- Replaces HID, CFL, and Incandescent
- Approved for totally enclosed fixtures**
- IP65 rated
- 5000K
- Long life—50,000 hours
- 5 Year limited warranty



S9753 S9754 S9755

High Lumen Industrial/Commercial LED Lamps - 12-24V

DAMP LOCATION ENCLOSED FIXTURE

Item Number	Lamp Description	Replaces INC/HID	W	V	Base Type	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9753	10W/LED/HID/5000K/12V-24V E26	90/30	10	12-24	E26	5000K	1200	5 13⁄16	50K	045923097539	48
S9754	14W/LED/HID/5000K/12V-24V E26	150/50	14	12-24	E26	5000K	1680	6 3⁄16	50K	045923097546	48
S9755	18W/LED/HID/5000K/12V-24V E26	200/70	18	12-24	E26	5000K	2160	7	50K	045923097553	48


** For minimum compartment size of enclosed fixture visit www.satco.com. Lamp life may vary depending on application and use.

Product sheet SA2609

Hi-Pro LED post top lamps

- For use in any post top fixture to provide light out and down only
- Direct wire (ballast by-pass) 100-277V / E26
- Approved for enclosed fixtures**
- Long life—50,000 hours
- 5 Year limited warranty







Controls light pollution

** ENCLOSED FIXTURE c UL US LISTED

High Lumen LED Lamps

Item Number	Lamp Description	W	V	Base Type	CRI	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Mstr.
S9779	40W/LED/HID/PT/3000K/100-277V	40	100-277	E26	80+	3000K	5000	5 ½	50K	045923097799	12
Accessories											
92-410	Mog to Med Socket Reducer									045923924064	
80-929	Hard Wire Surge Protector									045923809293	

Product sheet SA2107

**See warranty for details.

Third generation Hi-Pro LED multi-beam lamps

High lumen, adjustable, multi-directional lamps for industrial and commercial applications

- Replaces HID, CFL, and incandescent
- Direct wire range voltage 100-277V
- Approved for totally enclosed fixtures**
- High bay, low bay, hanging sockets, and post top
- 2700K or 5000K
- Light panels lock into place creating
- 3 separate beam angle options
- Long life—50,000 hours
- 5 Year limited warranty



260° Beam



150° Beam



120° Beam

High Lumen Multi-Beam Industrial/Commercial LED Lamps

DAMP LOCATION ** ENCLOSED FIXTURE c UL US LISTED c CLASSIFIED UL US DLC LISTED


Item Number	Lamp Description	INC/CFL/HID	W	V	Base Type	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Mstr.
S39768	30W/LED/HID/MB/ 27K/100-277V/E26	200/55/150	30	100-277	E26	2700K	3840	6¾	50K	045923397684	24
S39750	30W/LED/HID/MB/ 5K/100-277V/E26	200/55/150	30	100-277	E26	5000K	4200	6¾	50K	045923397509	24
S39798	40W/LED/HID/MB /27K/100-277V/EX39	300/65/175	40	100-277	EX39	2700K	5120	7¼	50K	045923397981	12
S39751	40W/LED/HID/MB/ 5K/100-277V/EX39	300/65/175	40	100-277	EX39	5000K	5600	7¼	50K	045923397516	12
S39799	60W/LED/HID/MB/ 27K/100-277V/EX39	500/85/250	60	100-277	EX39	2700K	7680	7¾	50K	045923397998	12
S39752	60W/LED/HID/MB/ 5K/100-277V/EX39	500/85/250	60	100-277	EX39	5000K	8400	7¾	50K	045923397523	12
S39769	75W/LED/HID/MB/ 5K/100-277V/EX39	750/105/400	75	100-277	EX39	5000K	10500	8½	50K	045923397691	12
S39679	90W/LED/HID/MB/ 5K/100-277V/EX39	750/150/600	90	100-277	EX39	5000K	12600	10	50K	045923396793	6
Accessories											
86-215	Hi-Pro Motion Sensor/PIR (Passive Infrared)									045923862151	
80-929	Hard Wire Surge Protector - 10kV									045923809293	
92-410	Mog to Med Socket Reducer for S39750 and S39768									045923924101	

Product sheet SA2678

**See warranty for details.



270° Beam

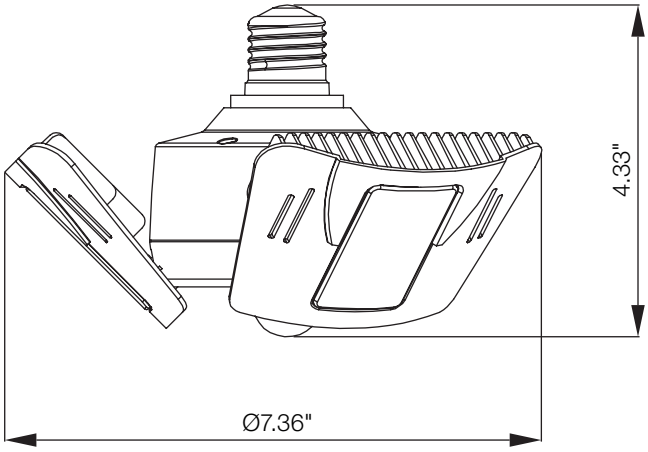

60W LED multi-beam Utility light with and without motion sensor

Applications


- Garage
- Barn
- Workshop
- Shed
- Utility room
- Large open spaces

Features

- **Replaces high-wattage HID CFL and Incandescent lamps, but uses only 60 Watts**
- LED panels adjust to 135° and a full 180°
- Rugged construction
- Built-in motion sensor option
- E26 medium base
- Direct wire range voltage 100-277V
- Damp location
- cULus Listed
- 3 Year warranty



120° Beam

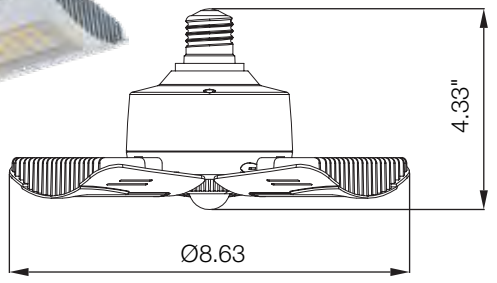

DAMP LOCATION | 50,000 HOURS | c UL us LISTED

60W LED multi-beam Utility light with and without motion sensor

Item Number	Lamp Description	W	V	CRI	Bulb Type	Base Type	CCT	Finish	Lm	Life/ Hrs	UPC	Pack/ Master
S13118	60W/LED/UTL/MB/4000K	60	100-277	80	MULTI-BEAM	E26	4000K	White	5880	50K	045923131189	12
S13119	60W/LED/UTL/MB/4000K/MOTION	60	100-277	80	MULTI-BEAM	E26	4000K	White	5880	50K	045923131196	12

Product sheet SA2320

See warranty for details.

High Voltage Hi-Pro LED Lamps 277V-480V

Features

- High Lumen Omni-directional LED for Industrial/ Commercial applications
- Direct wire range voltage 277–480V
- Approved for totally enclosed fixtures**
- 4KV Surge protection



S13123
54W



S13124
100W

277-480V DAMP LOCATION ** ENCLOSED FIXTURE

High Voltage Hi-Pro LED LAMPS 277V-480V

Item Number	Lamp Description	W	HID Equiv	V	CRI	CCT	Base Type	Lumens	Life/ Hrs.	UPC	Pack
S13123	54W/LED/HID/5K/277-480V/EX39	54	250W	277-480V	80	5000K	EX39	8100	50K	045923131233	12
S13124	100W/LED/HID/5K/277-480V/EX39	100	400W	277-480V	80	5000K	EX39	15000	50K	045923131240	4

Product sheet SA2698

**See warranty for details.

Hi-Pro 360


Innovation in every direction—literally! Rotating, multi-angle LED lamp

Applications

- Indoor/outdoor direct replacement
- Street lamps/shoe box
- High bays/low bays
- Parking garages
- Commercial and industrial security
- Gymnasiums and other high ceiling applications
- Outdoor canopies

Features

- Multi-angle rotating LED lamp with folding panel design
- Replaces HID, CFL, and incandescent
- Direct wire range voltage 100-277V
- Approved for totally enclosed fixtures
- 70 Watts
- 2700K 4000K or 5000K options
- Built-in 4K surge protection
- EX39 base
- IP64/Damp location
- Long life—50,000 hours
- 5 Year limited warranty

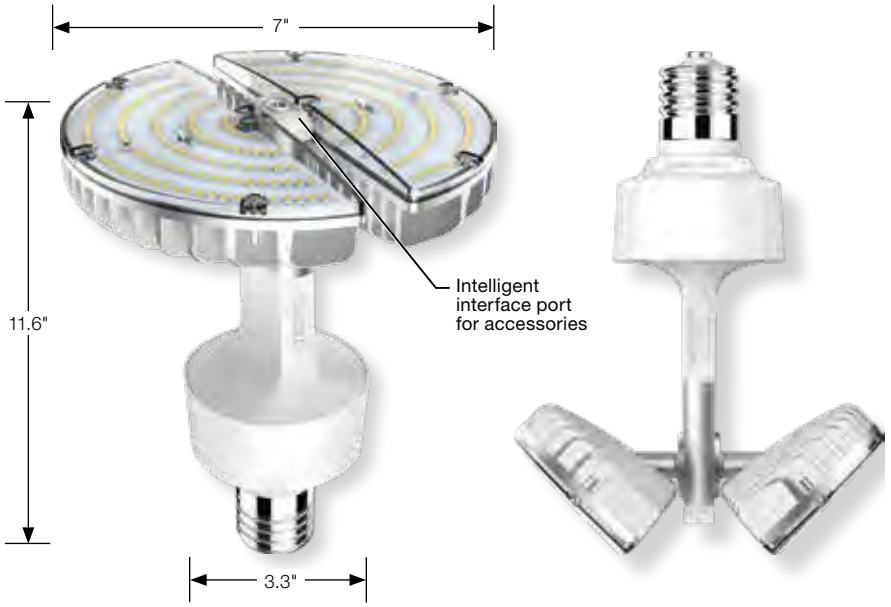





Up, down, tilt, angle one side or both—almost unlimited lighting options

† DIMMABLE · DAMP LOCATION · ** ENCLOSED FIXTURE · 100-277V · c UL us LISTED · c CLASSIFIED UL us · * DLC

Hi-Pro 360 Lamps

Item Number	Lamp Description	W	V	Base Type	CRI	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Mstr.
S13120*	70W/LED/HP360/827	70	100-277	EX39	80+	2700K	10500	11 9⁄16	50K	045923131202	8
S13121*	70W/LED/HP360/840	70	100-277	EX39	80+	4000K	10500	11 9⁄16	50K	045923131219	8
S13122*	70W/LED/HP360/850	70	100-277	EX39	80+	5000K	10500	11 9⁄16	50K	045923131226	8
Accessories											
80-929	Hard Wire Surge Protector – 10kV									045923809293	
80-954	Hi-Pro Wi-Fi Module – (Satco STARFISH in the App store)									045923809549	
80-956	Hi-Pro Photocell - On/Off with adjustable settings for daylight and timers									045923809563	
80-957	Hi-Pro Microwave motion sensor - On/Off with standby dimming option									045923809570	

† Dimmable via WiFi accessory only.

Product sheet SA2579

**See warranty for details.

GEN2 Hi-Pro shoebox lamp with smart port



Applications

- Shoebox/Parking lot
- Canopy
- Landscape Flood

Features

- Greater efficiency
- 4Kv surge protection
- Advanced heat dissipation
- Rotatable base
- New smart sensor port & accessories

BALLAST BYPASS | 80 CRI | DAMP LOCATION ** | ENCLOSED FIXTURE | c UL us LISTED | CLASSIFIED c UL us | DLC

Item Number	Lamp Description	W	V	Base Type	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
High Lumen Industrial/Commercial LED Lamps											
S28931	80W/LED/HID/SB/3K/EX39/100-277V	80	100-277V	EX39	3000K	10,400	180°	8 ¾	50K	045923289316	4
S28932	80W/LED/HID/SB/5K/EX39/100-277V	80	100-277V	EX39	5000K	10,400	180°	8 ¾	50K	045923289323	4
S28937	110W/LED/HID/SB/3K/EX39/100-277V	110	100-277V	EX39	3000K	14,300	180°	11 ¼	50K	045923289378	4
S28938	110W/LED/HID/SB/5K/EX39/100-277V	110	100-277V	EX39	5000K	14,300	180°	11 ¼	50K	045923289385	4
Accessories											
80-929	Hard Wire Surge Protector – 10kV									045923809293	
80-954	Hi-Pro Wi-Fi Module – (Satco STARFISH in the App store)									045923809549	
80-956	Hi-Pro Photocell - On/Off with adjustable settings for daylight and timers									045923809563	
80-957	Hi-Pro Microwave motion sensor - On/Off with standby dimming option									045923809570	
** For minimum compartment size of enclosed fixture visit www.satco.com. Lamp life may vary depending on application and use.											

Product sheet SA2687

**See warranty for details.


Hi-Pro LED wall pack lamp series

High lumen, directional lamps for industrial and commercial fixture applications

- For use in wall pack, canopy, shoe box, or cobra head fixtures
- 20/30/40/60 Watt options replaces 100/150/175/250 Watt HID
- Replaces HID
- Approved for totally enclosed fixtures**
- Direct wire range voltage 100-277V
- IP64, higher efficiency, improved heat dissipation
- 4KV Surge protection
- Reduced size
- 180˚ beam/adjustable base (E26/E39)
- Horizontal operation
- DLC listed*
- Damp location
- Long life—50,000 hours
- 5 Year limited warranty



Beam Profile



Beam Angle: 180°



High Lumen Industrial/Commercial LED Lamps

Item Number	Lamp Description	W	V	Rpl.	Base Type	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S8928	20W/LED/HID/WP/5K/E26/100-277V	20	100-277	100W	E26	5000K	3000	180°	5 ¼	50K	045923089282	12
S8980	30W/LED/HID/WP/5K/E26/100-277V	30	100-277	150W	E26	5000K	4500	180°	7	50K	045923089800	12
S8929	40W/LED/HID/WP/5K/E26/100-277V	40	100-277	175W	E26	5000K	6000	180°	7 7/8	50K	045923089299	12
S8930*	40W/LED/HID/WP/5K/E39/100-277V	40	100-277	175W	E39	5000K	6000	180°	8 ½	50K	045923089305	12
S8987*	60W/LED/HID/WP/5K/E39/100-277V	60	100-277	250W	E39	5000K	9000	180°	10 ¾	50K	045923089879	12
Accessories												
92-410	Mog to Med Socket Reducer for S9750										045923924064	
80-929	Hard Wire Surge Protector										045923809293	

** For minimum compartment size of enclosed fixture visit www.satco.com. Lamp life may vary depending on application and use.

Product sheet SA2173

**See warranty for details.

Hi-Pro LED high bay/low bay lamps

High lumen LED lamps for industrial and commercial applications

Features

- Replaces HID, CFL, and Incandescent
- 115º beam angle
- Long neck option fits more fixtures
- Direct wire range voltage 120-277V
- 6 KV Surge protection
- Light weight
- Advanced passive heat dissipation
- Long life—50,000 hours
- 5 Year limited warranty




S13112
S13113



S13114
S13115

Beam Profile



Average Beam Angle 115°

DAMP LOCATION ** ENCLOSED FIXTURE 120-277V 115° BEAM * DLC

High Lumen Industrial/Commercial LED Lamps

Item Number	Lamp Description	W	V	Base Type	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S13112*	80W/LED/HID-HB/4K/120-277V	80	120-277	EX39	80+	4000K	9300	115	10 ⅛	50K	045923131127	4
S13113*	80W/LED/HID-HB/5K/120-277V	80	120-277	EX39	80+	5000K	9700	115	10 ⅛	50K	045923131134	4
S13114*	130W/LED/HID-HB/4K/120-277V	130	120-277	EX39	80+	4000K	15500	115	12 ⅜	50K	045923131141	4
S13115*	130W/LED/HID-HB/5K/120-277V	130	120-277	EX39	80+	5000K	16100	115	12 ⅜	50K	045923131158	4
Accessories												
80-929	Hard Wire Surge Protector										045923809293	

** For minimum compartment size of enclosed fixture visit www.satco.com. Lamp life may vary depending on application and use.

Product sheet SA2530

**See warranty for details.

Hi-Pro Sensors

Adjustable controls for LED HID replacement lamps

Even more energy saving • Increased functionality • Simple installation (plug and play)

80-954 Hi-Pro WiFi Module



80-954

Features

- Access functions through Satco/Starfish App
- Dimming and time control
- Support single or group lamp control
- Available voice control:
- Amazon Echo, Google Home, etc.
- WiFi: 2.4GHz
- OS: Android 4.2 or newer, IOS 8.0 or newer

Specifications

- Operating voltage: 15V DC + 2V
- Current: 20mA
- IP rating: IP20
- WIFI: 2.4GHz
- OS: Android 4.2 or newer, IOS 8.0 or newer
- Operating Temperature: -20°C (+4°F) to +60°C (+140°F)
- Warranty: 5 years

80-955 Hi-Pro Motion Sensor / Infra-Red


80-955

Features

- Motion detection area: 6m (19.7')
- Standby bi-level dimming: Off, 20% dim, 40% dim or 60% dim
- Hold time: up to 10 minutes
- Standard 3.5mm Aux port connection
- Not for use in enclosed fixtures

Specifications

- Operating voltage: 15V DC + 2V
- Output voltage: 0-10V
- Current: 20mA
- IP rating: IP20
- Operating Temperature: -20°C (+4°F) to +35°C (+95°F)
- Warranty: 5 years

80-956 Hi-Pro Photocell


80-956

Features

- Natural light detection
- Reaction lux options: 20 lx, 50 lx, 100 lx, 300 lx
- Adjustable hold time
- Standard 3.5mm Aux port connection

Specifications

- Operating voltage: 15V DC + 2V
- Output voltage: 0-10V
- Current: 20mA
- IP rating: IP20
- Operating Temperature: -20°C (4°F) to +60°C (+140°F)
- Warranty: 5 years

80-957 Hi-Pro Motion Sensor / Microwave


80-957

Features

- Motion detection area: 10m (33')
- Standby bi-level dimming: Off, 20% dim, 40% dim or 60% dim
- Hold time: up to 10 minutes
- Suitable for use in enclosed fixtures (non-metallic)

Specifications

- Operating voltage: 15V DC + 2V
- Output voltage: 0-10V
- Current: 20mA
- IP rating: IP20
- Operating Temperature: -20°C (+4°F) to +60°C (+140°F)
- Warranty: 5 years

For Use with: Hi-Pro 360 (page 74), Shoebox Series (page 75)


Item Number	Description	UPC
80-954	Hi-Pro Wi-Fi Module – (Satco STARFISH in the App store)	045923809549
80-955	Hi-Pro Motion Sensor - Infra-Red - Standby bi-level dimming	045923809552
80-956	Hi-Pro Photocell - On/Off with adjustable settings for daylight and timers	045923809563
80-957	Hi-Pro Microwave motion sensor - On/Off with standby dimming option	045923809570

Product sheet SA2634

See warranty for details.



Screw terminals



E39 Mogul Base

Instant hi-bay fixture


Keyless porcelain mogul base lamp holder with screw terminals

- Perfect for use with LED HID replacement lamps
- Commercial/industrial applications
- Screw-in eye hook for safety cable included
- Holder rated at 1500W Max.
- 600V
- Max lamp weight 5 lbs.





Lamp and cables not included

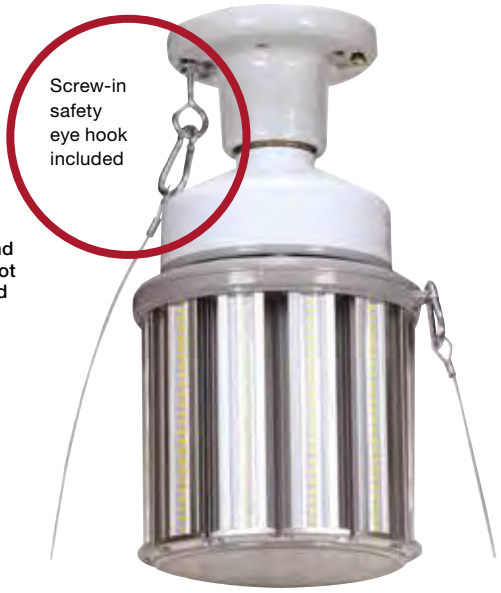

MOGUL BASE | 1500 WATTS | 600 VOLT | c UL us LISTED

Keyless Porcelain Mogul Base Lamp Holder

Item Number	Lamp Description	Max. W	Max. V	UPC	Pack
90-483	Keyless Mogul Lamp Holder	1500	600	045923904837	40

Product sheet SA2393

See warranty for details.

Hi-Pro LED temporary work lights

New Work Light Series: Built to Work on the Job Longer, Harder, Brighter than ever!


- Durable, lightweight with high impact cage
- Energy-efficient, high lumen led lighting
- Omni-directional 360° beam angle
- Grounded 3-prong plug
- T-handle for mounting





Linkable for longer runs from one power supply.




600W max linked units:
60W x 10 pcs. max
100W x 6 pcs. max
150W x 4 pcs. max





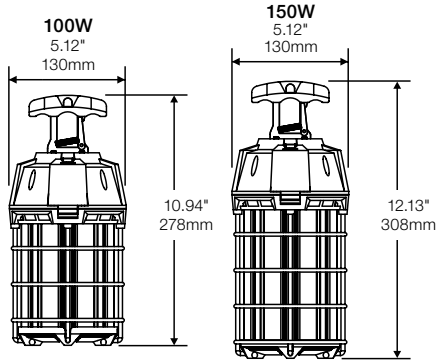



Hi-Pro LED Temporary Work Lights

Item Number	Lamp Description	W	V	CRI	CCT	Base Type	Lm	Life/ Hrs.	UPC	Pack
S38939	60W/LED/HID/TEMP/5K/120V	60	120V	85	5000K	Hook/Plug	6000	50K	045923389399	4
S38946	100W/LED/HID/TEMP/5K/120V	100	120V	85	5000K	Hook/Plug	10000	50K	045923389467	4
S38975	150W/LED/HID/TEMP/5K/120V	150	120V	85	5000K	Hook/Plug	15000	50K	045923389757	4

Product sheet SA2703

See warranty for details.


Hi-Pro temporary construction string light set - 50 ft.




Features

- For use in any commercial work area
- 5 Lights per string
- 50 Watt/6000 Lumens per string
- 10 ft. between lights
- Linkable up to 6 sets
- Replaces HID, CFL and Incandescent
- 360° Omni-directional light
- Portable/plug-in, 120V
- IP65—Water and dust proof
- 18 AWG cable



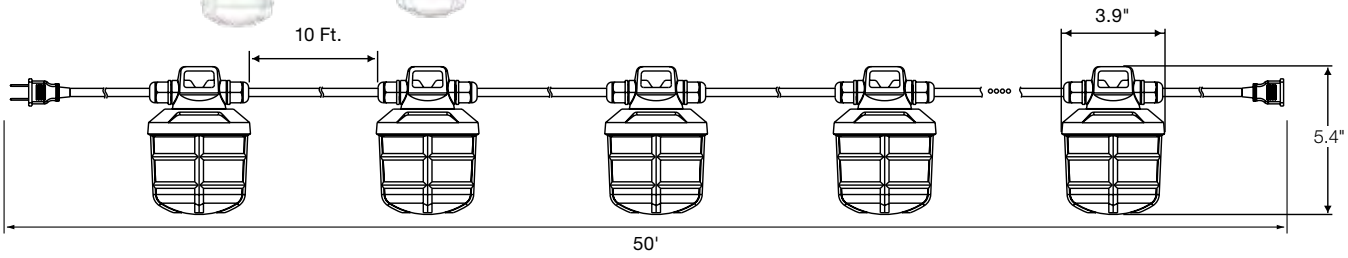

5 x 10W Lamps




Total 50W

Replace




5 x 75W Lamps



Total 375W

Beam Profile/Lamp



360° Illumination

360° BEAM · WET LOCATION · c UL us LISTED · RoHS COMPLIANT

Hi-Pro Temporary Construction String Light Set - 50 Ft.

Item Number	Lamp Description	W	V	CRI	CCT	Base Type	Lm	Life/ Hrs.	UPC	Pack
S28976	50W/LED/5PC/TEMP/STRING/120V	100	120	85	5000K	2 Prong Plug	10000	50K	045923289767	4

Product sheet SA2716

See warranty for details.



S18400




4.5 Watts 6 Watts

LED/CFL ballast bypass Type B replacement lamps

2-Pin G23, GX23 base

Applications / Features

- 4.5W G23 replaces 5W, 7W & 9W CFL
- 6W GX23 replaces 13W CFL
- 2-Sided illumination
- Instant on to full brightness / no flickering
- Vertical or horizontal applications
- Up to 50% energy saving
- c-UL-us Classified
- Long life—50,000 hours
- 5 Year warranty



Wiring diagram



S18400-S18404 G23 Base



S28725-S28729 GX23 Base

TYPE B | BALLAST BYPASS | 50,000 HOURS | 120-277V | 5 Year Warranty | c UL us CLASSIFIED

LED/CFL Ballast Bypass Type B Replacement Lamps

Item Number	Description	W	V	Base Type	CCT	CRI	Beam	M.O.L. (Inches)	LM	Life/ Hrs.	UPC	Pack/ Master
S18400	4.5W/LED/CFL/827/G23/BP	4.5	120-277	G23	2700K	80	360°	6 ½	450	50K	045923184000	50
S18401	4.5W/LED/CFL/830/G23/BP	4.5	120-277	G23	3000K	80	360°	6 ½	450	50K	045923184017	50
S18402	4.5W/LED/CFL/835/G23/BP	4.5	120-277	G23	3500K	80	360°	6 ½	450	50K	045923184024	50
S18403	4.5W/LED/CFL/840/G23/BP	4.5	120-277	G23	4000K	80	360°	6 ½	450	50K	045923184031	50
S18404	4.5W/LED/CFL/850/G23/BP	4.5	120-277	G23	5000K	80	360°	6 ½	450	50K	045923184048	50
S28725	6W/LED/CFL/827/GX23/BP/G2	6	120-277	GX23	2700K	80	360°	7 1⁄16	600	50K	045923287251	50
S28726	6W/LED/CFL/830/GX23/BP/G2	6	120-277	GX23	3000K	80	360°	7 1⁄16	600	50K	045923287268	50
S28727	6W/LED/CFL/835/GX23/BP/G2	6	120-277	GX23	3500K	80	360°	7 1⁄16	600	50K	045923287275	50
S28728	6W/LED/CFL/840/GX23/BP/G2	6	120-277	GX23	4000K	80	360°	7 1⁄16	600	50K	045923287282	50
S28729	6W/LED/CFL/850/GX23/BP/G2	6	120-277	GX23	5000K	80	360°	7 1⁄16	600	50K	045923287299	50

Product sheet SA2685

See warranty for details.







LED/CFL dual mode (ballast bypass type B/ ballast compatible type A) lamps

Direct replacements for CFL GX23 base lamps in existing fixtures with or without ballasts.*

Features

- Over 50% energy savings vs. standard
- Ballast compatible and ballast bypass in one lamp
- Instant-on full brightness / no flickering
- 120-277V in bypass mode
- Damp location
- Long life—50,000 hours
- c-UL-us Listed - Type A
- c-UL-us Classified - Type B
- 5 Year warranty**



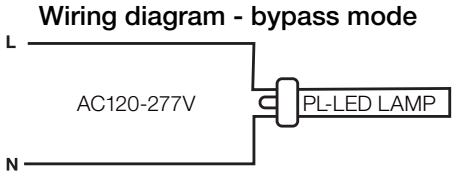

LED/CFL GX23 Base Dual Mode Lamps

DAMP LOCATION · TYPE A BALLAST · c UL us LISTED · TYPE B BALLAST BYPASS · CLASSIFIED c UL us

Item Number	Lamp Description	W	V (Bypass)	Base Type	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Mstr.
S11550	5.5W/LED/CFL/827/2P/DUAL	5.5	120/277	GX23	80	2700K	500	120°	6	50K	045923115509	25
S11551	5.5W/LED/CFL/830/2P/DUAL	5.5	120/277	GX23	80	3000K	500	120°	6	50K	045923115516	25
S11552	5.5W/LED/CFL/835/2P/DUAL	5.5	120/277	GX23	80	3500K	500	120°	6	50K	045923115523	25
S11553	5.5W/LED/CFL/840/2P/DUAL	5.5	120/277	GX23	80	4000K	550	120°	6	50K	045923115530	25
S11554	5.5W/LED/CFL/850/2P/DUAL	5.5	120/277	GX23	80	5000K	550	120°	6	50K	045923115547	25

* Visit www.satco.com for an approved list.

Product sheet SA2668

See warranty for details.

LED/CFL type A direct replacement lamps

4-pin (electronic ballasts)
2-pin (magnetic ballasts)

- 4-pin 26, 32, 42 Watt direct replacement
- 2-pin 26 Watt direct replacement
- 4-pin lamps fit G24q-3 & GX24q-3 and GX24q-4 sockets
- 2-pin lamps fit G24d-3 sockets
- No re-wiring needed
- Instant on to full brightness / no flickering
- Vertical and horizontal options
- Up to 70% energy saving
- DLC listed* (4-pin only)
- c-UL-us listed
- Long life—50,000 hours
- 5 Year warranty



S29858, S29859, S29860, S29861
G24Q



S9862, S9863, S9864, S9865
G24D

Rotates 270° when installed



S29850, S29851, S29852, S29853
G24Q



S9854, S9855, S9856, S9857
G24D

LED/CFL Replacement Lamps

Item Number	Lamp Description	W	Base Type	CCT	CRI	M.O.L. (Inches)	Lm	Life/ Hrs.	UPC	Pack/ Master
4-Pin Horizontal										
S29850*	9WPLH/LED/830/DR/4P	9	G24Q	3000K	82	6 ⅝	950	50K	045923298509	50/10
S29851*	9WPLH/LED/835/DR/4P	9	G24Q	3500K	82	6 ⅝	950	50K	045923298516	50/10
S29852*	9WPLH/LED/840/DR/4P	9	G24Q	4000K	82	6 ⅝	900	50K	045923098529	50/10
S29853*	9WPLH/LED/850/DR/4P	9	G24Q	5000K	82	6 ⅝	900	50K	045923298530	50/10
2-Pin Horizontal										
S9854	9WPLH/LED/830/DR/2P	9	G24D	3000K	82	6 ⅝	850	50K	045923098543	50/10
S9855	9WPLH/LED/835/DR/2P	9	G24D	3500K	82	6 ⅝	850	50K	045923098550	50/10
S9856	9WPLH/LED/840/DR/2P	9	G24D	4000K	82	6 ⅝	900	50K	045923098567	50/10
S9857	9WPLH/LED/850/DR/2P	9	G24D	5000K	82	6 ⅝	900	50K	045923098574	50/10
4-Pin Vertical										
S29858*	9WPLV/LED/830/DR/4P	9	G24Q	3000K	82	4 11⁄16	950	50K	045923298585	50/10
S29859*	9WPLV/LED/835/DR/4P	9	G24Q	3500K	82	4 11⁄16	950	50K	045923298592	50/10
S29860*	9WPLV/LED/840/DR/4P	9	G24Q	4000K	82	4 11⁄16	900	50K	045923298608	50/10
S29861*	9WPLV/LED/850/DR/4P	9	G24Q	5000K	82	4 11⁄16	900	50K	045923298615	50/10
2-Pin Vertical										
S9862	9WPLV/LED/830/DR/2P	9	G24D	3000K	82	4 11⁄16	850	50K	045923098628	50/10
S9863	9WPLV/LED/835/DR/2P	9	G24D	3500K	82	4 11⁄16	850	50K	045923098635	50/10
S9864	9WPLV/LED/840/DR/2P	9	G24D	4000K	82	4 11⁄16	900	50K	045923098642	50/10
S9865	9WPLV/LED/850/DR/2P	9	G24D	5000K	82	4 11⁄16	900	50K	045923098659	50/10

Product sheet SA1979

See warranty for details.

PL/LED
ballast bypass type B replacement lamps

UL Classified

2-pin replacement for up to 26 Watt pin based CFL, uses only 9 Watts

2-pin LED lamps works in both 2-pin (magnetic) and 4-pin (electronic) sockets

- G24d (2-pin)—18 and 26W rep.
- G24q (4-pin)—13, 18, and 26 rep.

Direct wire 120-277V

Instant on to full brightness / no flickering

Rotates up to 270° for various fixture applications

Vertical and horizontal options

Up to 70% energy saving

Damp location


Long life—50,000 hours


5 Year warranty




S8530, S8531, S8532, S8533, S8534









S8535, S8536, S8537,
S8538, S8539

PL/LED Replacement Lamps

Item Number	Lamp Description	W	Base Type	CCT	CRI	M.O.L. (Inches)	Lm	Life/ Hrs.	UPC	Pack/ Master
S8530	9WPLH/LED/827/BP/2P	9	G24d	2700K	82	6 5/8	900	50K	045923085307	50/10
S8531	9WPLH/LED/830/BP/2P	9	G24d	3000K	82	6 5/8	950	50K	045923085314	50/10
S8532	9WPLH/LED/835/BP/2P	9	G24d	3500K	82	6 5/8	950	50K	045923085321	50/10
S8533	9WPLH/LED/840/BP/2P	9	G24d	4000K	82	6 5/8	1000	50K	045923085338	50/10
S8534	9WPLH/LED/850/BP/2P	9	G24d	5000K	82	6 5/8	1000	50K	045923085345	50/10
S8535	9WPLV/LED/827/BP/2P	9	G24d	2700K	82	4 11/16	900	50K	045923085352	50/10
S8536	9WPLV/LED/830/BP/2P	9	G24d	3000K	82	4 11/16	950	50K	045923085369	50/10
S8537	9WPLV/LED/835/BP/2P	9	G24d	3500K	82	4 11/16	950	50K	045923085376	50/10
S8538	9WPLV/LED/840/BP/2P	9	G24d	4000K	82	4 11/16	1000	50K	045923085383	50/10
S8539	9WPLV/LED/850/BP/2P	9	G24d	5000K	82	4 11/16	1000	50K	045923085390	50/10

Product sheet SA2328


See warranty for details.

LED/CFL type A direct replacement lamps

4-pin (electronic ballasts)

- UL listed 4-pin 42 Watt direct replacement
- 4-pin lamps fit GX24q-4 sockets
- No re-wiring needed
- Instant on to full brightness / no flickering
- Vertical and horizontal options
- DLC Listed*
- c-UL-us listed
- Up to 60% energy saving
- Long life—50,000 hours
- 5 Year warranty

Rotates 270° when installed

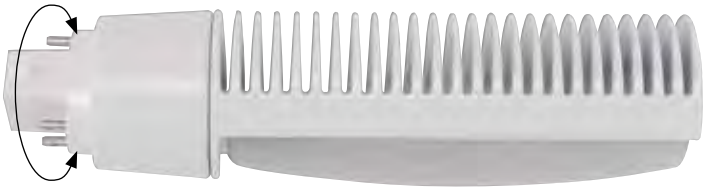

S21400, S21401, S21402, S21403



S21404, S21405, S21406, S21407

LED/CFL Replacement Lamps - Ballast Compatible♦

Item Number	Lamp Description	W	Base Type	CCT	CRI	M.O.L. (Inches)	Lm	Life/ Hrs.	UPC	Pack/ Mstr.
S21400*	PLT/16W/H/LED/830/4P/DR	16	G24Q	3000K	82	6 ⅜	1750	50K	045923224003	20
S21401*	PLT/16W/H/LED/835/4P/DR	16	G24Q	3500K	82	6 ⅜	1750	50K	045923224010	20
S21402*	PLT/16W/H/LED/840/4P/DR	16	G24Q	4000K	82	6 ⅜	1850	50K	045923224027	20
S21403*	PLT/16W/H/LED/850/4P/DR	16	G24Q	5000K	82	6 ⅜	1850	50K	045923224034	20
S21404*	PLT/16W/V/LED/830/4P/DR	16	G24Q	3000K	82	5 ¾	1750	50K	045923224041	20
S21405*	PLT/16W/V/LED/835/4P/DR	16	G24Q	3500K	82	5 ¾	1750	50K	045923224058	20
S21406*	PLT/16W/V/LED/840/4P/DR	16	G24Q	4000K	82	5 ¾	1850	50K	045923224065	20
S21407*	PLT/16W/V/LED/850/4P/DR	16	G24Q	5000K	82	5 ¾	1850	50K	045923224072	20

♦ Visit www.satco.com for ballast compatibility list.

Product sheet SA2471

See warranty for details.


LED/CFL ballast bypass type B replacement lamps

2-Pin GX23 ballast bypass GU24 Base, E26 Base

- 2-Pin 13 Watt CFL direct replacement
- GU24 Base and E26 Base are 13-18 Watt CFL and 60 Watt Incandescent direct replacements
- Instant on to full brightness / no flickering
- Rotates up to 270° for various fixture applications
- Vertical and horizontal options
- Up to 70% energy saving
- c-UL-us Classified—2-Pin ballast bypass
- c-UL-us listed—GU24 base, E26 base
- Long life—50,000 hours
- 5 Year warranty



GU24
S8745, S8746, S8747, S4748, S8749

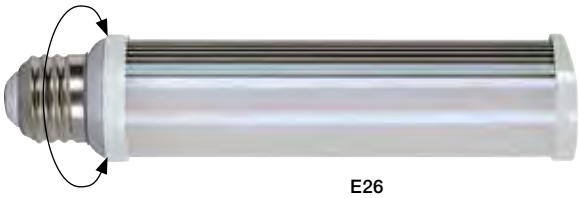

E26
S8755, S8756, S8757, S4758, S8759


LED/CFL Replacement Lamps

Item Number	Lamp Description	W	V	Base Type	CCT	CRI	M.O.L. (Inches)	Lm	Life/ Hrs.	UPC	Pack/ Master
GU24 Base—c-UL-us listed											
S8745	8W/H/LED/CFL/827/GU24	8	120-277V	GU24	2700K	83	6 1/3	920	50K	045923087455	50/10
S8746	8W/H/LED/CFL/830/GU24	8	120-277V	GU24	3000K	83	6 1/3	920	50K	045923087462	50/10
S8747	8W/H/LED/CFL/835/GU24	8	120-277V	GU24	3500K	83	6 1/3	960	50K	045923087479	50/10
S8748	8W/H/LED/CFL/840/GU24	8	120-277V	GU24	4000K	83	6 1/3	960	50K	045923087486	50/10
S8749	8W/H/LED/CFL/850/GU24	8	120-277V	GU24	5000K	83	6 1/3	960	50K	045923087493	50/10
E26 Base—c-UL-us listed											
S8755	8W/H/LED/CFL/827/E26	8	120-277V	E26	2700K	83	6 13/16	920	50K	045923087554	50/10
S8756	8W/H/LED/CFL/830/E26	8	120-277V	E26	3000K	83	6 13/16	920	50K	045923087561	50/10
S8757	8W/H/LED/CFL/835/E26	8	120-277V	E26	3500K	83	6 13/16	960	50K	045923087578	50/10
S8758	8W/H/LED/CFL/840/E26	8	120-277V	E26	4000K	83	6 13/16	960	50K	045923087585	50/10
S8759	8W/H/LED/CFL/850/E26	8	120-277V	E26	5000K	83	6 13/16	960	50K	045923087592	50/10

Product sheet SA2119

See warranty for details.


2G11
PLL 36W & 40W type B replacement lamps

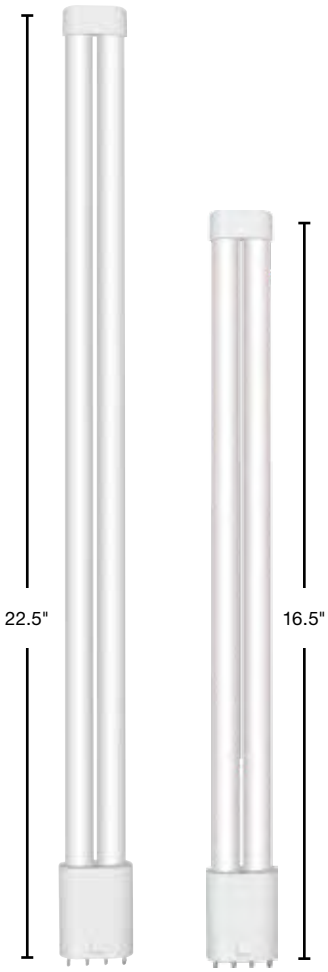

Ballast bypass replacement for 4-pin 40W PL-L

- Direct wire 120-277V
- All glass tube
- Over 40% energy savings
- Instant on to full brightness/no flickering
- c-UL-us classified
- Long life—50,000 hours
- 5 Year warranty

Wiring diagram



TYPE B · BALLAST BYPASS · DAMP LOCATION · CLASSIFIED c UL us · NSF · DLC

Satco 2G11 36W & 40W LED/CFL Replacement Lamps


Item Number	Lamp Description	W	CRI	Base Type	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9952	15PLL/LED/835/BP	15	80	2G11	3500K	2000	16 ½	50K	045923099526	10
S9953	15PLL/LED/840/BP	15	80	2G11	4000K	2000	16 ½	50K	045923099533	10
S9950	23PLL/LED/835/BP	23	82	2G11	3500K	2600	22 ½	50K	045923099502	10
S9951	23PLL/LED/840/BP	23	82	2G11	4000K	2800	22 ½	50K	045923099519	10

Product sheet SA2194

See warranty for details.

2', 3' & 6" U-bend LED type A T8 lamps

Direct replacement for linear or U-bend T8 fluorescent lamps in existing fixtures with instant or rapid start ballasts. No rewiring required♦

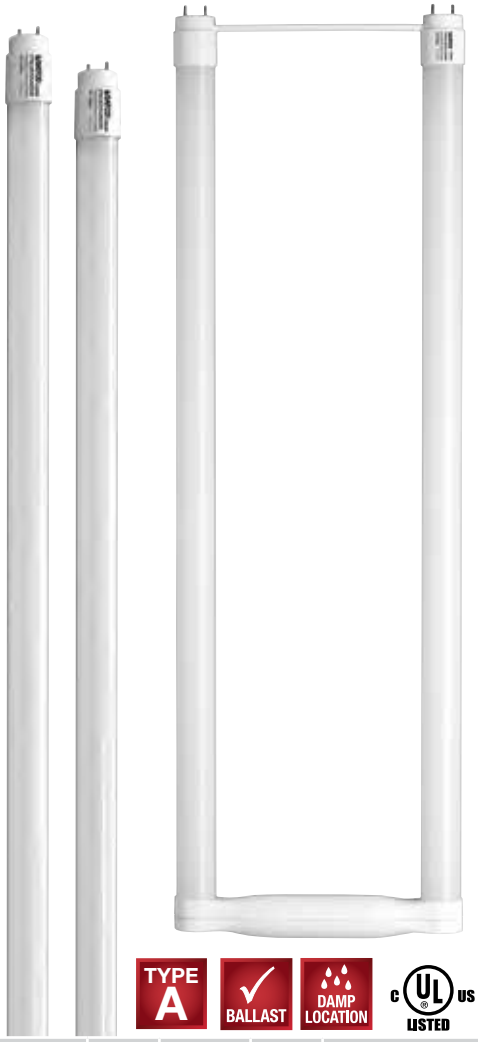

- Over 40% energy savings vs. standard T8 systems
- All glass tube
- Direct replacement solution allows the fixture to maintain the Original UL and CSA Compliance
- Compatible with emergency ballasts (2' & 3')††
- Integrated thermal fuse at pins
- Damp location
- DLC listed*
- NSF certified
- c-UL-us listed
- Long life—50,000 hours
- 5 Year warranty

TYPE A | BALLAST | DAMP LOCATION | c UL us LISTED | * DLC

LED T8 2', 3' & 6" U-Bend Ballast Compatible

Item Number	Lamp Description	W	CRI	Base Type	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
2' LED T8♦♦											
S9946*	8T8/LED/24-830/DR	8	82	Med Bi-Pin	220°	3000K	1200	24	50K	045923099465	10
S9947*	8T8/LED/24-835/DR	8	82	Med Bi-Pin	220°	3500K	1200	24	50K	045923099472	10
S9948*	8T8/LED/24-840/DR	8	82	Med Bi-Pin	220°	4000K	1250	24	50K	045923099489	10
S9949*	8T8/LED/24-850/DR	8	82	Med Bi-Pin	220°	5000K	1250	24	50K	045923099496	10
3' LED T8♦♦											
S29990*	10T8/LED/36-830/DR	10	82	Med Bi-Pin	220°	3000K	1400	36	50K	045923099908	10
S29991*	10T8/LED/36-835/DR	10	82	Med Bi-Pin	220°	3500K	1400	36	50K	045923099915	10
S29992*	10T8/LED/36-840/DR	10	82	Med Bi-Pin	220°	4000K	1450	36	50K	045923099922	10
S29993*	10T8/LED/36-850/DR	10	82	Med Bi-Pin	220°	5000K	1450	36	50K	045923099939	10
U-Bend 6" LED T8											
S9994*	11.5T8U6/LED/22.5-830/DR	11.5	82	Med Bi-Pin	230°	3000K	1700	22 ½	50K	045923099946	12
S9995*	11.5T8U6/LED/22.5-835/DR	11.5	82	Med Bi-Pin	230°	3500K	1700	22 ½	50K	045923099953	12
S9996*	11.5T8U6/LED/22.5-840/DR	11.5	82	Med Bi-Pin	230°	4000K	1800	22 ½	50K	045923099960	12
S9997*	11.5T8U6/LED/22.5-850/DR	11.5	82	Med Bi-Pin	230°	5000K	1800	22 ½	50K	045923099977	12

♦ May not be compatible with all ballasts. Visit www.satco.com for an approved list.
♦♦ 2' & 3' May not be compatible with all rapid start and emergency ballasts. Visit www.satco.com for an approved list.

Product sheets SA2361, SA2153

See warranty for details.

12W and 15W, 4' LED type A T8 lamps

Direct replacement for linear fluorescent T8 lamps in existing fixtures with instant or rapid start ballasts. No rewiring required♦

- Over 40% energy savings vs. standard 4' T8 systems
- All glass tube
- Compatible with emergency & dimming ballasts♦
- Integrated thermal fuse at pins
- Damp location
- c-UL-us listed
- NSF certified
- DLC listed*
- Long life—50,000 hours
- 5 Year warranty



TYPE A | BALLAST | DAMP LOCATION | c UL us LISTED | * DLC

LED T8 Ballast Compatible - 12W

Item Number	Lamp Description	W	CRI	Bulb Type	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S39934*	12T8/LED/48-830/DR	12	82	T8	210°	3000K	1700	48	50K	045923399343	25
S39935*	12T8/LED/48-835/DR	12	82	T8	210°	3500K	1700	48	50K	045923399350	25
S39936*	12T8/LED/48-840/DR	12	82	T8	210°	4000K	1800	48	50K	045923399367	25
S39937*	12T8/LED/48-850/DR	12	82	T8	210°	5000K	1800	48	50K	045923399374	25

ᵗ May not be compatible with all IS, RS, DM, and EM ballasts. Visit www.satco.com for an approved list.

Product sheet SA2305



TYPE A | BALLAST | DAMP LOCATION | c UL us LISTED | * DLC

LED T8 Ballast Compatible - 15W

Item Number	Lamp Description	W	CRI	Bulb Type	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S39975*	15T8/LED/48-830/DR	15	80	T8	210°	3000K	2100	48	50K	045923399756	25
S39976*	15T8/LED/48-835/DR	15	80	T8	210°	3500K	2100	48	50K	045923399763	25
S39977*	15T8/LED/48-840/DR	15	80	T8	210°	4000K	2200	48	50K	045923399770	25
S39978*	15T8/LED/48-850/DR	15	80	T8	210°	5000K	2200	48	50K	045923399787	25

♦ May not be compatible with all IS, RS, DM, and EM ballasts. Visit www.satco.com for an approved list.

Product sheet SA2487

See warranty for details.


Linear LED ballast bypass type B T8 series

Double ended wiring

- Works with existing sockets–shunted or non-shunted
- Reduces labor costs for installation
- Built-in shock resistant circuit (not hot until both ends are installed)
- No ballast or external driver required
- Direct wire 120-277V line voltage
- All glass tube
- Approved for use with tube guards
- Damp location
- c-UL-us Classified
- DLC Listed
- Long life—50,000 hours
- 5 Year warranty



Double Ended Wiring Diagram



TYPE B | BALLAST BYPASS | DAMP LOCATION | CLASSIFIED c UL us | DLC

LED T8 Ballast Bypass

Item Number	Lamp Description	W	CRI	Base Type	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
9W, 2'											
S29900	9T8/LED/24-830/BP 120-277V	9	82	Med Bi-Pin	220°	3000K	1100	24	50K	045923299001	25
S29901	9T8/LED/24-835/BP 120-277V	9	82	Med Bi-Pin	220°	3500K	1100	24	50K	045923299018	25
S29902	9T8/LED/24-840/BP 120-277V	9	82	Med Bi-Pin	220°	4000K	1150	24	50K	045923299025	25
S29903	9T8/LED/24-850/BP 120-277V	9	82	Med Bi-Pin	220°	5000K	1150	24	50K	045923299032	25
12W, 3'											
S29926	12T8/LED/36-830/BP 120-277V	12	82	Med Bi-Pin	220°	3000K	1400	36	50K	045923299261	25
S29927	12T8/LED/36-835/BP 120-277V	12	82	Med Bi-Pin	220°	3500K	1400	36	50K	045923299278	25
S29928	12T8/LED/36-840/BP 120-277V	12	82	Med Bi-Pin	220°	4000K	1450	36	50K	045923299285	25
S29929	12T8/LED/36-850/BP 120-277V	12	82	Med Bi-Pin	220°	5000K	1450	36	50K	045923299292	25
14W, 4'											
S29913	14T8/LED/48-830/BP 120-277V	14	82	Med Bi-Pin	220°	3000K	1800	48	50K	045923299131	25
S29914	14T8/LED/48-835/BP 120-277V	14	82	Med Bi-Pin	220°	3500K	1800	48	50K	045923299148	25
S29915	14T8/LED/48-840/BP 120-277V	14	82	Med Bi-Pin	220°	4000K	1800	48	50K	045923299155	25
S29916	14T8/LED/48-850/BP 120-277V	14	82	Med Bi-Pin	220°	5000K	1800	48	50K	045923299162	25
S11924	14T8/LED/48-865/BP 120-277V	14	82	Med Bi-Pin	210°	6500K	1800	48	50K	045923119248	25
17W, 4'											
S29904	17T8/LED/48-830/BP 120-277V	17	82	Med Bi-Pin	220°	3000K	2100	48	50K	045923299049	25
S29905	17T8/LED/48-835/BP 120-277V	17	82	Med Bi-Pin	220°	3500K	2100	48	50K	045923299056	25
S29906	17T8/LED/48-840/BP 120-277V	17	82	Med Bi-Pin	220°	4000K	2200	48	50K	045923299063	25
S29907	17T8/LED/48-850/BP 120-277V	17	82	Med Bi-Pin	220°	5000K	2200	48	50K	045923299070	25

Product sheet SA2405

See warranty for details.


Dimmable 13.5W linear LED T8 ballast bypass type B lamps



Features

- No ballast or external driver required
- Direct wire 120V line voltage*
- All glass tube
- Dimmable**
- Damp location
- Long life: 50,000 hours
- c-UL-us Classified
- DLC Listed
- NSF Certified
- 5 Year warranty

Single Ended Wiring*



(Non-shunted sockets)

TYPE B | DIMMABLE | BALLAST BYPASS | DAMP LOCATION | CLASSIFIED c UL us | DLC

LED T8 Fluorescent Replacement Lamps

Item Number	Lamp Description	W	V	CRI	Base Type	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	M/Case Qty
S11920	13.5T8/LED/48-830/DIM-BP	13.5	120	82	G13	220°	3000K	1700	48	50K	045923119200	25
S11921	13.5T8/LED/48-835/DIM-BP	13.5	120	82	G13	220°	3500K	1700	48	50K	045923119217	25
S11922	13.5T8/LED/48-840/DIM-BP	13.5	120	82	G13	220°	4000K	1800	48	50K	045923119224	25
S11923	13.5T8/LED/48-850/DIM-BP	13.5	120	82	G13	220°	5000K	1800	48	50K	045923119231	25

**See satco.com for dimmer compatibility list.

Product sheet SA2533

See warranty for details.


Premium LED T8 ballast bypass type B, true flicker-free lamps

- No ballast or external driver required
- Flicker free — Less than 2%
- Installation protection — will not light if ballast is not bypassed
- Low Wattage — only 11.5 watts
- High lumen — up to 2600
- Direct wire 120-277V line voltage*
- All glass tube
- PET Coated — shatterproof
- Long life: 50,000 hours
- c-UL-us Classified
- ETL Sanitation listed (conforms to NSF)
- DLC Listed
- 5 Year warranty




2 Installation Options

1. Double Ended Wiring



2. Single Ended Wiring

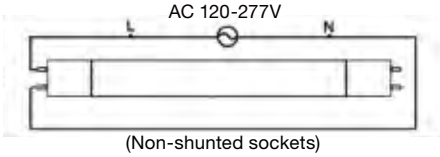

(Non-shunted sockets)

TYPE B | BALLAST BYPASS | DAMP LOCATION

LED T8 fluorescent replacement lamps

Item Number	Lamp Description	W	CRI	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Case Pack
S11910	11.5T8/LED/48-830/FF/BP 120-277V	11.5	80	190°	3000K	1650	48	50K	045923119101	25
S11911	11.5T8/LED/48-835/FF/BP 120-277V	11.5	80	190°	3500K	1650	48	50K	045923119118	25
S11912	11.5T8/LED/48-840/FF/BP 120-277V	11.5	80	190°	4000K	1750	48	50K	045923119125	25
S11913	11.5T8/LED/48-850/FF/BP 120-277V	11.5	80	190°	5000K	1800	48	50K	045923119132	25
S11914	18.5T8/LED/48-830/FF/BP 120-277V	18.5	80	190°	3000K	2400	48	50K	045923119149	25
S11915	18.5T8/LED/48-835/FF/BP 120-277V	18.5	80	190°	3500K	2400	48	50K	045923119156	25
S11916	18.5T8/LED/48-840/FF/BP 120-277V	18.5	80	190°	4000K	2500	48	50K	045923119163	25
S11917	18.5T8/LED/48-850/FF/BP 120-277V	18.5	80	190°	5000K	2600	48	50K	045923119170	25

Product sheet SA2527

See warranty for details.


15W Linear LED ballast bypass type B T8 series

Direct wire replacement for linear fluorescent T8 lamps in existing fixtures. Single ended wiring/non-shunted sockets.

Single ended wiring/non-shunted sockets
No ballast or external driver required
Direct wire 120-277V line voltage**
All glass tube
Damp location
c-UL-us Classified
DLC listed*
Long life—50,000 hours
5 Year warranty



Single Ended Wiring Diagram



Wiring harnesses available including non-shunted sockets, sold separately	
Item Number	Description
80/2626	1 LT BALLAST BYPASS WIRING HARNESS
80/2627	2 LT BALLAST BYPASS WIRING HARNESS
80/2628	3 LT BALLAST BYPASS WIRING HARNESS
80/2629	4 LT BALLAST BYPASS WIRING HARNESS

TYPE B BALLAST BYPASS DAMP LOCATION CLASSIFIED c UL us * DLC LISTED

LED T8 Ballast Bypass

Item Number	Lamp Description	W	CRI	Base Type	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9720*	15T8/LED/48-830/BP	15	82	Med Bi-Pin	230°	3000K	1700	48	50K	045923097201	10
S9721*	15T8/LED/48-835/BP	15	82	Med Bi-Pin	230°	3500K	1700	48	50K	045923097218	10
S9722*	15T8/LED/48-840/BP	15	82	Med Bi-Pin	230°	4000K	1800	48	50K	045923097225	10
S9723*	15T8/LED/48-850/BP	15	82	Med Bi-Pin	230°	5000K	1800	48	50K	045923097232	10

** Install on non-shunted lampholders


Product sheet SA1887

Linear LED ballast bypass type B T8 U-bend series

No ballast or external driver required
Direct wire 120-277V line voltage**
All glass tube
Damp location
c-UL-us Classified
DLC listed*
Long life—50,000 hours
5 Year warranty



Wiring Diagram



TYPE B BALLAST BYPASS DAMP LOCATION CLASSIFIED c UL us * DLC LISTED

Linear LED Ballast Bypass T8 U-Bend Series

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (inches)	Life/ Hrs.	UPC	Pack
S9930*	15T8U6/LED/22.5-830/BP	15	120-277	82	3000K	1700	220°	22 ½	50K	045923099304	12
S9931*	15T8U6/LED/22.5-835/BP	15	120-277	82	3500K	1700	220°	22 ½	50K	045923099311	12
S9932*	15T8U6/LED/22.5-840/BP	15	120-277	82	4000K	1800	220°	22 ½	50K	045923099328	12
S9933*	15T8U6/LED/22.5-850/BP	15	120-277	82	5000K	1800	220°	22 ½	50K	045923099335	12

** Install on non-shunted lampholders

Product sheet SA2189

See warranty for details.

Slimline 4', 6', 8' T8 ballast bypass type B series

- Double ended wiring
- Shatterproof coated
- Over 40% energy savings vs standard 8' T8 systems
- Slimline single pin base - replaces T8 & T12
- No ballast or external driver required
- Direct wire 120-277V line voltage
- All glass tube
- Damp location
- NSF certified
- c-UL-us Classified
- Long life—50,000 hours
- 5 Year warranty



Wiring Diagram



LED T8 Ballast Bypass

Item Number	Lamp Description	W	CRI	Base Type	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S11926	14T8/LED/48-840/BP	14	80	Single Pin (FA8)	210°	4000K	1900	48	50K	045923119262	25
S11927	24T8/LED/72-840/BP	24	80	Single Pin (FA8)	210°	4000K	3200	72	50K	045923119279	10
S9917*	43T8/LED/96-835/BP	43	82	Single Pin (FA8)	210°	3500K	5500	96	50K	045923099175	10
S9918*	43T8/LED/96-840/BP	43	82	Single Pin (FA8)	210°	4000K	5500	96	50K	045923099182	10
S9919*	43T8/LED/96-850/BP	43	82	Single Pin (FA8)	210°	5000K	5500	96	50K	045923099199	10


Product sheet SA2683

43W Linear LED ballast bypass 8' type B T8 series

- Double ended wiring
- Shatterproof coated
- Over 40% energy savings vs standard 8' T8 systems
- R17d base designed to replace 8' T8 HO and T12 HO Fluorescent lamps
- No ballast or external driver required
- Direct wire 120-277V line voltage
- All glass tube
- Damp location
- NSF certified
- c-UL-us Classified
- Long life—50,000 hours
- 5 Year warranty



Wiring Diagram



LED T8 Ballast Bypass

Item Number	Lamp Description	W	V	CRI	Base Type	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S9924	43T8/LED/96-840/BP/R17d	43	120-277V	82	R17d	210°	4000K	5500	96	50K	045923099243	10
S9925	43T8/LED/96-850/BP/R17d	43	120-277V	82	R17d	210°	5000K	5500	96	50K	045923099250	10
S9942	43T8/LED/96-865/BP/R17d	43	120-277V	82	R17d	210°	6500K	5500	96	50K	045923099427	10

Product sheet SA2611

See warranty for details.

25W, 4' Linear LED type A T5 lamps

Direct replacement for linear fluorescent F54T5HO lamps in existing fixtures with electronic ballasts. No rewiring required♦



- Over 50% energy savings vs. standard 4' T5 systems
- All glass tube • Compatible with rapid start ballasts♦
- Integrated thermal fuse at pins • Damp location • NSF certified • c-UL-us listed
- DLC listed* • Long life—50,000 hours • 5 Year warranty

LED T5 Ballast Compatible

Item Number	Lamp Description	W	CRI	Base Type	Bm	CCT	Lm	Nominal (M.O.L.)	Life/ Hrs.	UPC	Pack
S29912*	25T5/LED/46-835/DR	25	82	G5	185°	3500K	3300	48 (46)	50K	045923097126	10
S29910*	25T5/LED/46-840/DR	25	82	G5	185°	4000K	3500	48 (46)	50K	045923097102	10
S29911*	25T5/LED/46-850/DR	25	82	G5	185°	5000K	3500	48 (46)	50K	045923097119	10

♦ May not be compatible with all rapid start ballasts. Visit www.satco.com for an approved list.


Product sheet SA2306

LED T5 Type B ballast bypass series

Double or Single ended ballast bypass replacement for linear fluorescent T5 HO & HE lamps in existing fixtures.

- No ballast or external driver required
- Available in 2', 3' & 4'
- Direct wire 120-277V line voltage
- Single or double-ended wiring
- All glass tube • PET–shatterproof coated
- Damp location
- c-UL-us classified
- NSF certified
- DLC listed*
- Long life—50,000 hours
- 5 Year warranty





LED T5-Ballast Bypass Lamps

Item Number	Lamp Description	W	V	CRI	Base Type	Bm	CCT	Lm	Nominal Length (Inches)	Life/ Hrs.	UPC	Pk.
S28690*	13T5/LED/46-835/BP/HE/SE-DE	13	120-277	83	G5	240°	3500	1600	48	50K	045923286902	25
S28691*	13T5/LED/46-840/BP/HE/SE-DE	13	120-277	83	G5	240°	4000	1650	48	50K	045923286919	25
S28692*	13T5/LED/46-850/BP/HE/SE-DE	13	120-277	83	G5	240°	5000	1700	48	50K	045923286926	25
S28693	12T5/LED/24-835/BP/HO/SE-DE	12	120-277	83	G5	240°	3500	1400	24	50K	045923286933	25
S28694	12T5/LED/24-840/BP/HO/SE-DE	12	120-277	83	G5	240°	4000	1450	24	50K	045923286940	25
S28695	12T5/LED/24-850/BP/HO/SE-DE	12	120-277	83	G5	240°	5000	1500	24	50K	045923286957	25
S28696	16T5/LED/36-835/BP/HO/SE-DE	16	120-277	83	G5	240°	3500	1800	36	50K	045923286964	25
S28697	16T5/LED/36-840/BP/HO/SE-DE	16	120-277	83	G5	240°	4000	1850	36	50K	045923286971	25
S28698	16T5/LED/36-850/BP/HO/SE-DE	16	120-277	83	G5	240°	5000	1900	36	50K	045923286988	25
S39717*	25T5/LED/46-835/BP/HO/SE-DE	25	120-277	83	G5	240°	3500	3200	48	50K	045923397172	25
S39718*	25T5/LED/46-840/BP/HO/SE-DE	25	120-277	83	G5	240°	4000	3300	48	50K	045923397189	25
S39719*	25T5/LED/46-850/BP/HO/SE-DE	25	120-277	83	G5	240°	5000	3400	48	50K	045923397196	25

Product sheet SA2684

See warranty for details.


LED T5 mini bi-pin (G5) ballast bypass type B series

Ballast bypass replacement for mini bi-pin linear fluorescent T5 preheat lamps in existing fixtures.

- No ballast or external driver required
- Available in 6", 9", 12", & 21"
- Direct wire 120-277V line voltage
- PET Shatterproof coated
- Damp location
- c-UL-us classified
- Long life—50,000 hours
- 5 Year warranty



Double Ended Wiring



TYPE B | BALLAST BYPASS | DAMP LOCATION | CLASSIFIED c UL us

LED T5 Mini Bi-Pin Ballast Bypass Lamps

Item Number	Lamp Description	Replaces	W	V	CRI	Base Type	Bm	CCT	Lm	M.O.L. (Nominal)	Length (Inches)	Life/ Hrs.	UPC	Pack
S11900	2W/LED/T5/840	F4T5/CW	2	120-277	80	G5	240°	4000K	150	5 29/32	6	50K	045923119002	10
S11901	2W/LED/T5/865	F4T5/D	2	120-277	80	G5	240°	6500K	150	5 29/32	6	50K	045923119019	10
S11902	3W/LED/T5/840	F6T5/CW	3	120-277	80	G5	240°	4000K	270	8 29/32	9	50K	045923119026	10
S11903	3W/LED/T5/865	F6T5/D	3	120-277	80	G5	240°	6500K	270	8 29/32	9	50K	045923119033	10
S11904	4W/LED/T5/830	F8T5/WW	4	120-277	80	G5	240°	3000K	400	11 29/32	12	50K	045923119040	10
S11905	4W/LED/T5/840	F8T5/CW	4	120-277	80	G5	240°	4000K	400	11 29/32	12	50K	045923119057	10
S11906	4W/LED/T5/865	F8T5/D	4	120-277	80	G5	240°	6500K	400	11 29/32	12	50K	045923119064	10
S11907	7W/LED/T5/830	F13T5/WW	7	120-277	80	G5	240°	3000K	700	20 29/32	21	50K	045923119071	10
S11908	7W/LED/T5/840	F13T5/CW	7	120-277	80	G5	240°	4000K	700	20 29/32	21	50K	045923119088	10
S11909	7W/LED/T5/865	F13T5/D	7	120-277	80	G5	240°	6500K	700	20 29/32	21	50K	045923119095	10

Product sheet SA2463

See warranty for details.

LED T8 dual mode (ballast bypass type B/ ballast compatible type A) 1-5/8" u-bend lamps

Direct replacements for fluorescent T8 u-bend lamps in existing fixtures with or without ballasts.





- Over 50% energy savings vs. standard T8 systems
- Ballast compatible and ballast bypass in one lamp
- Bypass mode works in single or double ended wiring†
- Protection from arcing
- 120-277V in bypass mode
- Damp location
- NSF certified
- DLC 4.2 listed
- C-UL-us listed—ballast compatible
- c-UL-us Classified—ballast bypass
- Long life—50,000 hours
- 5 Year warranty

LED T8 Dual Mode U-bend Lamps—Ballast Compatible

Item Number	Lamp Description	W	CRI	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Mstr.
S18450	13T8/U1-G13/LED/830/DUAL	13	80	3000K	1800	22 ½	50K	045923184505	24
S18451	13T8/U1-G13/LED/835/DUAL	13	80	3500K	1800	22 ½	50K	045923184512	24
S18452	13T8/U1-G13/LED/840/DUAL	13	80	4000K	1900	22 ½	50K	045923184529	24
S18453	13T8/U1-G13/LED/850/DUAL	13	80	5000K	2000	22 ½	50K	045923184536	24

May not be compatible with all instant start, rapid start, dimmable, and emergency ballasts. Visit www.satco.com for an approved list.

Product sheet SA2462

LED T8 Dual Mode U-bend Lamps—Ballast Bypass

Item Number	Lamp Description	W	V	CRI	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Mstr.
S18450	13T8/U1-G13/LED/830/DUAL	13	120-277	80	3000K	1800	22 ½	50K	045923184505	24
S18451	13T8/U1-G13/LED/835/DUAL	13	120-277	80	3500K	1800	22 ½	50K	045923184512	24
S18452	13T8/U1-G13/LED/840/DUAL	13	120-277	80	4000K	1900	22 ½	50K	045923184529	24
S18453	13T8/U1-G13/LED/850/DUAL	13	120-277	80	5000K	2000	22 ½	50K	045923184536	24

Product sheet SA2462

See warranty for details.

LED T8 dual mode (ballast bypass type B/ ballast compatible type A) linear lamps

Direct replacements for fluorescent T8 lamps in existing fixtures with or without ballasts.

- Over 40% energy savings vs. standard T8 systems
- Ballast compatible (12W) and ballast bypass (13W) in one lamp
- Bypass mode works in single or double ended wiring♦♦
- Protection from arcing***
- All glass tube
- Compatible with emergency and dimming ballasts♦
- 120-277V in bypass mode
- Damp location
- PET coated
- NSF certified
- DLC 4.2 listed
- C-UL-us listed—ballast compatible
- c-UL-us Classified—ballast bypass
- Long life—50,000 hours
- 5 Year warranty



TYPE A ♦ BALLAST DAMP LOCATION c UL us LISTED NSF DLC

LED T8 Dual Mode Linear Lamps

Item Number	Lamp Description	W	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
Ballast Compatible♦										
S8890	12T8/LED/48-830/DUAL/BP-DR	12	83	3000K	1800	240˚	48	50K	045923088902	25
S8891	12T8/LED/48-835/DUAL/BP-DR	12	83	3500K	1800	240˚	48	50K	045923088919	25
S8892	12T8/LED/48-840/DUAL/BP-DR	12	83	4000K	1900	240˚	48	50K	045923088926	25
S8893	12T8/LED/48-850/DUAL/BP-DR	12	83	5000K	1900	240˚	48	50K	045923088933	25

♦ May not be compatible with all instant start, rapid start, dimmable, and emergency ballasts. Visit www.satco.com for an approved list. Product sheet SA2316

TYPE B ♦♦ BALLAST BYPASS DAMP LOCATION CLASSIFIED c UL us NSF DLC

LED T8 Dual Mode Linear Lamps

Item Number	Lamp Description	W	V	CRI	CCT	Lm	Bm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack/ Master
Ballast Bypass♦♦											
S8890	13T8/LED/48-830/DUAL/BP-DR	13	120-277	83	3000K	1800	240˚	48	50K	045923088902	25
S8891	13T8/LED/48-835/DUAL/BP-DR	13	120-277	83	3500K	1800	240˚	48	50K	045923088919	25
S8892	13T8/LED/48-840/DUAL/BP-DR	13	120-277	83	4000K	1900	240˚	48	50K	045923088926	25
S8893	13T8/LED/48-850/DUAL/BP-DR	13	120-277	83	5000K	1900	240˚	48	50K	045923088933	25

♦ May not be compatible with all instant start, rapid start, dimmable, and emergency ballasts. Visit www.satco.com for an approved list.
♦♦ Bypass mode works wired as a single ended lamp on non-shunted sockets or as a double ended lamp on either shunted or non-shunted sockets.

Product sheet SA2316

See warranty for details.

LED T8 dual mode linear lamps

Wiring–Ballast Compatible Type A


For instant start ballasts on the approved list, ensure that LED/fluorescent sockets are wired in a shunt configuration according to manufacturer's wiring diagram.

For rapid start ballasts on the approved list, non-shunted LED/fluorescent sockets are needed and wired according to manufacturer's wiring diagram.


Wiring Options–Ballast Bypass Type B - 120-277V



Single Ended—Non-Shunted Sockets



Double Ended—Non-Shunted Sockets



Double Ended—Shunted Sockets

System Performance - LED T8 Dual Mode Linear Lamps—Ballast Compatible

System Performance Chart				Bare Lamp (Rated)		Bare Lamp Wattage			System Wattage			Initial Lumens			Lifetime		
Item Nmbr	Description	CCT	Length (ft)	Nominal Wattage	Nominal Lumens	LBF (0.78)	NBF (0.88)	HBF (1.18)	LBF (0.78)	NBF (0.88)	HBF (1.18)	LBF (0.78)	NBF (0.88)	HBF (1.18)	LBF (0.78)	NBF (0.88)	HBF (1.18)▼
S8890	12T8/LED/48-830/DUAL/BP-DR	3000K	4	12	1800	11.0	12.0	17	13.5	15.5	20.0	1600	1800	2500	>50Khrs	>50Khrs	50Khrs
S8891	12T8/LED/48-835/DUAL/BP-DR	3500K	4	12	1800	11.0	12.0	17	13.5	15.5	20.0	1600	1800	2500	>50Khrs	>50Khrs	50Khrs
S8892	12T8/LED/48-840/DUAL/BP-DR	4000K	4	12	1900	11.0	12.0	17	13.5	15.5	20.0	1700	1900	2600	>50Khrs	>50Khrs	50Khrs
S8893	12T8/LED/48-850/DUAL/BP-DR	5000K	4	12	1900	11.0	12.0	17	13.5	15.5	20.0	1700	1900	2600	>50Khrs	>50Khrs	50Khrs

*** Power must be turned off prior to installing lamps. Sockets must be in good working order, not broken, cracked or electrically compromised. If arcing occurs at the lamp pin, thermal fuse may activate to avoid overheating of lamp.
▼ LED tube life will change with ballast factor, configurations producing ballast factors above 1.18 are not allowed.

Product sheet SA2316

See warranty for details.

Linear LED T8, T5HO Type C system

Dedicated LED linear lamps and driver system with integral 0-10V dimming.

Features

- For retrofit and installation in new fixtures
- Driver footprint matches ballast footprint
- High efficiency
- Compatible with instant start wiring
- Low flicker design
- 120-277V, 0-10V Dimming
- 3000, 35000, 4000, 5000K
- 82 CRI
- All glass lamps, damp rated, DLC listed
- Built-in surge protection
- 50,000 hour life
- 5 Year warranty

Applications

- Replacement of existing Linear Fluorescent lamps and ballast commonly found in commercial and industrial sites, and new installations

Satco Type C systems include

- Dedicated LED lamp and driver system
- DLC rated for use in utility programs



S8012
1-2 Lamp driver



S8013
3-4 Lamp driver



S8014
1-2 Lamp driver



S8015
3-4 Lamp driver

Linear LED
T8 Type C

Linear LED
T5 Type C



Note: Fluorescent lamps are not compatible with Type C drivers

See warranty for details.

Linear LED T8 Type C lamps

Item Number	Lamp Description	W	CRI	Bulb Type	Base Type	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	M/Case Qty
2FT												
S11930	8T8/LED/24-830/XD	8	82	LED	G13	220°	3000K	1200	24	50K	045923119309	25
S11931	8T8/LED/24-835/XD	8	82	LED	G13	220°	3500K	1200	24	50K	045923119316	25
S11932	8T8/LED/24-840/XD	8	82	LED	G13	220°	4000K	1200	24	50K	045923119323	25
S11933	8T8/LED/24-850/XD	8	82	LED	G13	220°	5000K	1200	24	50K	045923119330	25
3FT												
S11934	11T8/LED/36-830/XD	11	82	LED	G13	220°	3000K	1600	36	50K	045923119347	25
S11935	11T8/LED/36-835/XD	11	82	LED	G13	220°	3500K	1600	36	50K	045923119354	25
S11936	11T8/LED/36-840/XD	11	82	LED	G13	220°	4000K	1600	36	50K	045923119361	25
S11937	11T8/LED/36-850/XD	11	82	LED	G13	220°	5000K	1600	36	50K	045923119378	25
4FT												
S11938	12T8/LED/48-830/XD	12	82	LED	G13	220°	3000K	1800	48	50K	045923119385	25
S11939	12T8/LED/48-835/XD	12	82	LED	G13	220°	3500K	1800	48	50K	045923119392	25
S11940	12T8/LED/48-840/XD	12	82	LED	G13	220°	4000K	1800	48	50K	045923119408	25
S11941	12T8/LED/48-850/XD	12	82	LED	G13	220°	5000K	1800	48	50K	045923119415	25

LED T8 Type C drivers

Item Number	Description	Lamps driven	V in	V out	Current in 120V	Current in 277V	Current out 120V, 277V	Freq. input HZ	Power factor 120V	Power factor 277V	Operating temp.	Storage temp.	UPC
S8012	LED driver/ 2', 3', 4'/Type C/T8	1, 2	120-277	24-48	300	130	290	50/60	0.95	0.93	-20° to 55°C	-40° to 85°C	045923090127
S8013	LED driver/ 2', 3', 4'/Type C/T8	3, 4	120-277	24-48	590	230	290	50/60	0.95	0.93	-20° to 55°C	-40° to 85°C	045923090134

Linear LED T5 Type C lamps

Item Number	Lamp Description	W	CRI	Bulb Type	Base Type	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	M/Case Qty
4FT T5												
S11942	23T5/LED/48-835/XD	23	82	LED	G5	220°	3500K	3500	48	50K	045923119422	25
S11943	23T5/LED/48-840/XD	23	82	LED	G5	220°	4000K	3500	48	50K	045923119439	25
S11944	23T5/LED/48-850/XD	23	82	LED	G5	220°	5000K	3500	48	50K	045923119446	25

LED T5 Type C drivers

Item Number	Description	Lamps driven	V in	V out	Current in 120V	Current in 277V	Current out 120V, 277V	Freq. input HZ	Power factor 120V	Power factor 277V	Operating temp.	Storage temp.	UPC
S8014	LED driver/4'/ Type C/T5	1, 2	120-277	30-48	540	240	530	50/60	0.95	0.93	-20° to 55°C	-40° to 85°C	045923080142
S8015	LED driver/4'/ Type C/T5	3, 4	120-277	30-45	1020	450	530	50/60	0.98	0.96	-20° to 55°C	-40° to 85°C	045923080159

Product sheet SA2613

See warranty for details.

8" and 12" T9 LED ballast bypass Type B Circeline lamps

- No ballast or external driver required
- Over 40% energy savings vs. standard T9 systems
- Replaces 22W and 32W fluorescent Circlines
- 120–277V (direct wire)
- Damp location
- NSF certified
- c-ETL-us listed
- Long life—50,000 hours
- 5 Year warranty




12"–16 Watt



8"–11 Watt

Beam Profile



Beam Angle: 135°

TYPE B | BALLAST BYPASS | DAMP LOCATION | c ETL us LISTED | NSF

LED T9 8" and 12" Circeline Lamps

Item Number	Lamp Description	W	CRI	Base Type	V	Bm	CCT	Lm	M.O.L. (Inches)	Life/ Hrs.	UPC	Pack
S16500	FC8T9/11W/LED/CIR/830/BP	11	80	G10Q	120-277	135°	3000K	1100	8	50K	045923165009	12
S16501	FC8T9/11W/LED/CIR/840/BP	11	80	G10Q	120-277	135°	4000K	1210	8	50K	045923165016	12
S16502	FC8T9/11W/LED/CIR/865/BP	11	80	G10Q	120-277	135°	6500K	1210	8	50K	045923165023	12
S16503	FC12T9/16W/LED/CIR/830/BP	16	80	G10Q	120-277	135°	3000K	1600	12	50K	045923165030	12
S16504	FC12T9/16W/LED/CIR/840/BP	16	80	G10Q	120-277	135°	4000K	1760	12	50K	045923165047	12
S16505	FC12T9/16W/LED/CIR/865/BP	16	80	G10Q	120-277	135°	6500K	1760	12	50K	045923165054	12

Product sheet SA2461

See warranty for details.

LED Emergency Back-Up

For LED T8 and T5 ballast bypass lamps.

Features

- 5 Watt or 10 Watt output power options
- Driver type: Constant wattage LED emergency
- Approximate lumens output 500lms~1000lms
- LED test switch and indicator light included
- Operating frequency: 50/60 Hz
- Max. current: 100mA@120v / 215mA@120v
- 1.8 Watt standby power
- 90 minute battery run time
- Output and over-power protection
- Recharge 24 hours max
- Lithium Ion battery
- 120-277V input
- Damp location
- 32°F-122°F (0°C-50°C) Operating temperature
- 5 Year warranty




Compatability


- Satco 4' T8 (S9720–S9723)
- Satco U-Bend (S9930–S9933)
- Satco 4' T5 LED bypass lamps (S29717–S29719)
- Satco 2G11 PL-L (S9950-9951)
- Satco 2' T8 (S29900-S29905)
- Satco 4' T8 (S11924, S29913-S29916)
- Satco 3' T8 (S29926-S29929)
- Satco 4' T8 (S29904-S29907)

Wiring Instructions

Single Ended Wiring

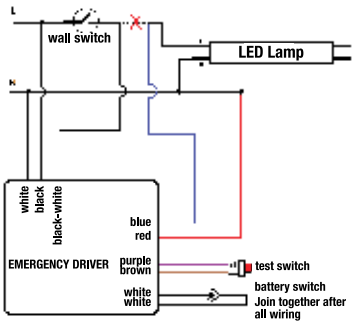


Double Ended Wiring

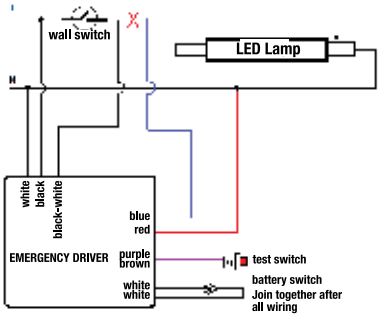


Dimensions

S8000

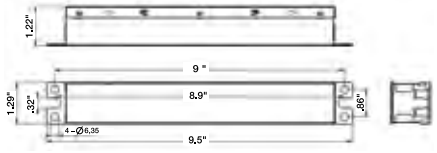

S8002

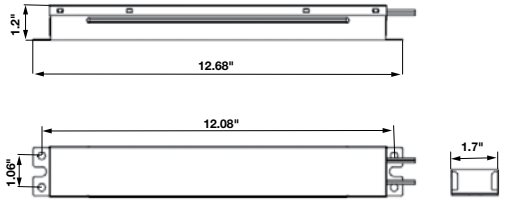

Emergency battery backup

Item #	Description	Watts	Voltage	M.O.L.	Max. Current	Dimensions	Power Factor	UPC	Case
S8000	5W Emergency LED driver	5	120-277	9.5"	100mA@120V	1.3"W x 1.22"H x 9.5"L	70.35	045923080005	25
S8002	10W Emergency LED driver	10	120-277	12.68"	215mA@120V	1.7"W x 1.20"H x 12.68"L	70.35	045923080029	12

Meets UL924, CEC Title 20, FCC15 Part 15 Class A, Compliance.

Product sheet SA2363


See warranty for details.

LED T8 Type B sign lamps extended line with new length options

- Over 40% savings vs. standard T8 systems
- 14 Length options from 2' to 10'
- Base rotates 90° for easy installation
- Full illumination for 2-way signs
- Wide, 330° beam angle • CRI >83
- No ballast and no external driver required
- Direct wire 120-277V line voltage
- Damp location • NSF Certified
- c-UL-us Classified • Long life—50,000 hours
- 5 Year warranty



Wiring Diagram - AC 120-277V
Single Ended Wiring Required



TYPE B | BALLAST BYPASS | DAMP LOCATION | CLASSIFIED c UL us | NSF

LED T8 Sign Lamps

Item Number	Lamp Description	W	CRI	Base	CCT	Lm	Nominal (MOL inches))	Life/ Hrs.	UPC	Pack/ Mstr.
S16412	7T8/LED/HO-SIGN/18-840/BP	7	83	R17D	4000K	950	18 (15.9)	50K	045923164125	10
S16413	7T8/LED/HO-SIGN/18-865/BP	7	83	R17D	6500K	950	18 (15.9)	50K	045923164132	10
S16400	9T8/LED/HO-SIGN/24-840/BP	9	83	R17D	4000K	1200	24 (21.9)	50K	045923164002	10
S16401	9T8/LED/HO-SIGN/24-865/BP	9	83	R17D	6500K	1200	24 (21.9)	50K	045923164019	10
S16414	11T8/LED/HO-SIGN/30-840/BP	11	83	R17D	4000K	1500	30 (27.9)	50K	045923164149	10
S16415	11T8/LED/HO-SIGN/30-865/BP	11	83	R17D	6500K	1500	30 (27.9)	50K	045923164156	10
S16402	12T8/LED/HO-SIGN/36-840/BP	12	83	R17D	4000K	1500	36 (33.9)	50K	045923164026	10
S16403	12T8/LED/HO-SIGN/36-865/BP	12	83	R17D	6500K	1500	36 (33.9)	50K	045923164033	10
S16416	15T8/LED/HO-SIGN/42-840/BP	15	83	R17D	4000K	2100	42 (40)	50K	045923164163	10
S16417	15T8/LED/HO-SIGN/42-865/BP	15	83	R17D	6500K	2100	42 (40)	50K	045923164170	10
S16404	18T8/LED/HO-SIGN/48-840/BP	18	83	R17D	4000K	2300	48 (46.0)	50K	045923164040	10
S16405	18T8/LED/HO-SIGN/48-865/BP	18	83	R17D	6500K	2300	48 (46.0)	50K	045923164057	10
S16406	24T8/LED/HO-SIGN/60-840/BP	24	83	R17D	4000K	3100	60 (57.9)	50K	045923164064	10
S16407	24T8/LED/HO-SIGN/60-865/BP	24	83	R17D	6500K	3100	60 (57.9)	50K	045923164071	10
S16418	26T8/LED/HO-SIGN/64-840/BP	26	83	R17D	4000K	3650	64 (61.9)	50K	045923164187	10
S16419	26T8/LED/HO-SIGN/64-865/BP	26	83	R17D	6500K	3650	64 (61.9)	50K	045923164194	10
S16408	30T8/LED/HO-SIGN/72-840/BP	30	83	R17D	4000K	4100	72 (69.9)	50K	045923164088	10
S16409	30T8/LED/HO-SIGN/72-865/BP	30	83	R17D	6500K	4100	72 (69.9)	50K	045923164095	10
S16420	32T8/LED/HO-SIGN/84-840/BP	32	83	R17D	4000K	4500	84 (81.9)	50K	045923164200	10
S16421	32T8/LED/HO-SIGN/84-865/BP	32	83	R17D	6500K	4500	84 (81.9)	50K	045923164217	10
S16410	36T8/LED/HO-SIGN/96-840/BP	36	83	R17D	4000K	5000	96 (93.9)	50K	045923164101	10
S16411	36T8/LED/HO-SIGN/96-865/BP	36	83	R17D	6500K	5000	96 (93.9)	50K	045923164118	10
S16422	42T8/LED/HO-SIGN/108-840/BP	42	83	R17D	4000K	5800	108 (105)	50K	045923164224	10
S16423	42T8/LED/HO-SIGN/108-865/BP	42	83	R17D	6500K	5800	108 (105)	50K	045923164231	10
S16424	45T8/LED/HO-SIGN/117-840/BP	45	83	R17D	4000K	6300	117 (114)	50K	045923164248	10
S16425	45T8/LED/HO-SIGN/117-865/BP	45	83	R17D	6500K	6300	117 (114)	50K	045923164255	10
S16426	48T8/LED/HO-SIGN/120-840/BP	48	83	R17D	4000K	6700	120 (117)	50K	045923164262	10
S16427	48T8/LED/HO-SIGN/120-865/BP	48	83	R17D	6500K	6700	120 (117)	50K	045923164279	10

4' and up - shipped in full cases only

Product sheet SA2494

See warranty for details.



Circular LED module retrofit kits

Upgrades most flush mount fixtures to efficient LED light

- Replaces 3 60W incandescent lamps, uses only 20 Watts
- Dimmable
- Dimensions: 8" W x 0.65" H
- Life—30,000 hours
- 3 Year warranty
- LED Circular light engine
- All necessary hardware for installation into a variety of flush mount fixtures
- Instructions and wiring diagrams



A. (1) circular light engine
B. (6) small wire nuts
C. (6) medium wire nuts
D. (1) lock-down retaining ring & washer
E. (3) 1" #4 screws
F. (4 x 2 each) assorted snap-in grommets (install grommets where supply wires enter fixture for power).
G. Wiring Diagram



Easily converts most standard flush mount fixtures to LED

DIMMABLE DAMP LOCATION Intertek

Circular LED Module Retrofit Kits

Item Number	Lamp Description	W	V	CCT	CRI	Lm	Life/ Hrs.	UPC	Pack
S9782	20W/LED/LIGHT ENGINE/27K/RK	20	120-277	2700K	90	1450	30K	045923097829	20/1
S9783	20W/LED/LIGHT ENGINE/30K/RK	20	120-277	3000K	90	1550	30K	045923097836	20/1
S9784	20W/LED/LIGHT ENGINE/40K/RK	20	120-277	4000K	90	1650	30K	045923097843	20/1

Product sheet SA2002

See warranty for details.



Educate consumers and increase sales!

At SATCO, we don't just bring great products to the market, we help you sell them! With powerful in-store selling tools your lighting center is both a focal point and profit center!

RETAIL SUPPORT

SATCO offers a continually expanding array of merchandise to support your in-store sales effort and create an educative and informative lighting section. From aisle flags and gondola headers to informative counter cards and shelf talkers that assist with LED technology information.

In addition, our entire library of high quality product photos and graphics are available for your use in your flyers, advertising and marketing.

COUNTER CARDS
Place these informational cards in alternate busy departments to remind customers about their lighting needs.



Left to Right Paint Department Counter Card SA1456, Energy Efficient Counter Card SA 1207, Energy Efficient Lamps and Fixtures Counter Card SA1458

RETAIL SUPPORT

BRAND AWARENESS



SATCO BRAND LOGO BANNER
SA1296

LIGHTING CENTER LOCATION TOOLS



AISLE FLAGS
Assist in defining shelving sections for easy product location and stocking. Shown here, LED Lamp. Other flags available.

LED LAMP AISLE VIOLATOR TAG SA1292/4
(mounting hardware available)



LED GONDOLA HEADER SA 2006 (header mounting hardware available)


LED GONDOLA HEADER
Assists customers in easily identifying the LED products that can be found in your lighting center, helping them better understand what technologies are available for both their needs today and in the future.



LED GONDOLA SHELF STRIP SA1265/4


SHELF STRIP
Assist in product location for the stocking and finding of products.

EDUCATIONAL TOOLS

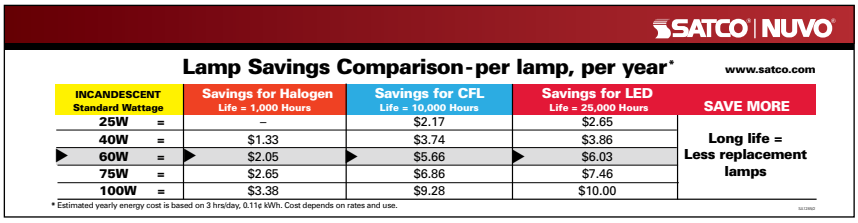

ENERGY EFFICIENT SHELF TALKER SA1205

GONDOLA HEADER AND SHELF TALKERS
Available on a number of topics, Gondola headers and shelf talkers can help educate consumers on a number of topics pertinent to products in your lighting center, helping you sell more!

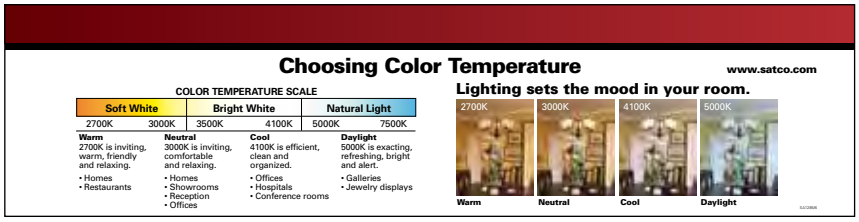

CHOOSING COLOR TEMPERATURE SA1285/2 (header mounting hardware available)



ENERGY EFFICIENT SHELF TALKER
SA1205

Item	Page
80-929	35, 55, 55, 70, 72, 73, 76, 77, 78, 79
80-935	71
80-954	76, 77, 80
80-955	80
80-956	76, 77, 80
80-957	76, 77, 80
86-215	73
90-483	81
92-406	70
92-410	35, 71, 72, 73, 78
S8000	106
S8002	106
S8012	104
S8013	104
S8014	104
S8015	104
S8189	41
S8190	41
S8191	41
S8480	27
S8481	27
S8482	27
S8483	31
S8484	31
S8485	31
S8486	33
S8487	33
S8488	33
S8489	32
S8490	34
S8494	49
S8495	50
S8496	51
S8497	52
S8498	52
S8499	32
S8530	87
S8531	87
S8532	87
S8533	87
S8534	87
S8535	87
S8536	87
S8537	87
S8538	87
S8539	87
S8542	38
S8543	38
S8544	38
S8545	38
S8550	7
S8551	15
S8552	16
S8553	11
S8554	17
S8555	17
S8556	17
S8559	17
S8564	32
S8565	32
S8566	34
S8567	34
S8568	34
S8570	38
S8571	38
S8572	40
S8573	40
S8581	49
S8582	50
S8583	51
S8584	52
S8585	56
S8588	58
S8589	58
S8598	49
S8600	61
S8601	61
S8603	56, 58, 59
S8604	59
S8605	59
S8609	21
S8610	22
S8611	22
S8612	22
S8615	21
S8616	21
S8635	57
S8636	57
S8637	57
S8638	57
S8639	57
S8640	57
S8641	57
S8642	57
S8643	57
S8644	57
S8650	31
S8651	31
S8652	33
S8653	33
S8676	58
S8677	58
S8678	58
S8679	58
S8688	62
S8689	62
S8735	35
S8736	35
S8737	35
S8738	35
S8745	89
S8746	89
S8747	89
S8748	89
S8749	89
S8755	89
S8756	89
S8757	89
S8758	89
S8759	89
S8778	35
S8779	35
S8839	14
S8840	16
S8841	17
S8849	12
S8851	17
S8890	101
S8891	101
S8892	101
S8893	101
S8914	26
S8915	26
S8916	26
S8920	26
S8928	78
S8929	78
S8930	78
S8950	41
S8951	41
S8952	41
S8953	41
S8980	78
S8987	78
S9004	60
S9005	60
S9021	45
S9022	45
S9029	45
S9030	40
S9031	40
S9032	40
S9033	40
S9058	45
S9064	40
S9065	40
S9067	40
S9068	40
S9150	24
S9151	24
S9152	24
S9153	24
S9154	24
S9155	24
S9156	24
S9157	24
S9158	24
S9159	24
S9160	24
S9161	24
S9162	24
S9163	24
S9164	24
S9165	24
S9166	24
S9167	24
S9168	24
S9169	24
S9170	24
S9171	24
S9172	24
S9173	24
S9174	24
S9175	24
S9176	24
S9177	24
S9200	41
S9201	41
S9202	41
S9203	41
S9280	56
S9281	56
S9282	56
S9283	56
S9316	38
S9317	38
S9318	38
S9319	38
S9380	58
S9381	58
S9382	58
S9383	58
S9384	58
S9385	58
S9386	56
S9387	56
S9388	56
S9389	56
S9400	49
S9401	49
S9402	49
S9403	49
S9404	49
S9405	49
S9406	49
S9407	49
S9408	49
S9409	49
S9410	50
S9411	50
S9412	50
S9413	50
S9414	50
S9415	50
S9416	50
S9417	50
S9418	50
S9419	50
S9420	50
S9421	50
S9422	50
S9423	50
S9424	50
S9425	51
S9426	51
S9427	51
S9428	51
S9429	51
S9430	51
S9431	51
S9432	51
S9433	51
S9434	51
S9435	51
S9436	51
S9437	51
S9438	51
S9439	51
S9440	52
S9441	52
S9442	52
S9443	52
S9444	52
S9445	52
S9446	52
S9447	52
S9448	52
S9449	52
S9450	52
S9451	52
S9452	52
S9453	52
S9454	52
S9455	52
S9456	52
S9457	52
S9480	52
S9481	52
S9482	52
S9483	52
S9484	52

Item	Page
S9485	49
S9486	50
S9487	51
S9488	52
S9490	57
S9491	57
S9492	57
S9493	57
S9494	57
S9495	57
S9496	57
S9497	57
S9498	57
S9499	57
S9542	61
S9543	61
S9544	61
S9545	61
S9546	61
S9547	61
S9550	56
S9551	56
S9552	57
S9553	57
S9564	12
S9565	13
S9566	13
S9567	15
S9569	15
S9571	16
S9575	17
S9576	17
S9577	18
S9578	18
S9579	18
S9580	17
S9581	17
S9582	17
S9583	18
S9584	18
S9585	18
S9588	18
S9590	25
S9591	25
S9592	25
S9593	26
S9594	26
S9595	26
S9598	67
S9599	67
S9616	57
S9620	43
S9621	43
S9622	43
S9623	43
S9624	43
S9627	43
S9630	43
S9631	43
S9632	43
S9633	43
S9634	44
S9635	44
S9636	44
S9637	44
S9638	44
S9639	44
S9640	44

Item	Page
S9641	44
S9698	44
S9703	27
S9704	27
S9707	27
S9708	27
S9720	96
S9721	96
S9722	96
S9723	96
S9729	67
S9753	72
S9754	72
S9755	72
S9760	55
S9761	55
S9762	55
S9763	55
S9764	55
S9765	55
S9779	72
S9782	108
S9783	108
S9784	108
S9806	37
S9807	17
S9826	8
S9827	12
S9828	12
S9845	9
S9846	9
S9854	86
S9855	86
S9856	86
S9857	86
S9862	86
S9863	86
S9864	86
S9865	86
S9868	14
S9869	16
S9870	11
S9872	17
S9873	18
S9892	17
S9893	12
S9895	17
S9917	97
S9918	97
S9919	97
S9924	97
S9925	97
S9930	96
S9931	96
S9932	96
S9933	96
S9942	97
S9946	91
S9947	91
S9948	91
S9949	91
S9950	90
S9951	90
S9952	90
S9953	90
S9960	14
S9961	14
S9962	16

Item	Page
S9963	16
S9964	14, 15
S9965	16
S9966	19
S9967	19
S9968	19
S9969	19
S9970	19
S9971	19
S9980	60
S9981	60
S9982	60
S9983	60
S9986	18
S9987	18
S9994	91
S9995	91
S9996	91
S9997	91
S11210	62
S11211	62
S11212	62
S11213	62
S11214	62
S11215	62
S11216	62
S11217	62
S11300	23
S11301	23
S11302	23
S11303	23
S11304	23
S11305	23
S11306	23
S11307	23
S11310	31
S11311	31
S11320	25
S11321	25
S11323	31
S11324	31
S11325	31
S11326	33
S11327	33
S11328	33
S11329	34
S11330	34
S11331	34
S11332	34
S11333	43
S11334	57
S11335	57
S11336	57
S11350	7
S11351	7
S11352	7
S11353	7
S11354	7
S11355	8
S11356	8
S11357	9
S11358	9
S11359	9
S11360	9
S11361	9
S11362	9
S11363	11
S11364	11

Item	Page
S11365	12
S11366	12
S11367	13
S11368	13
S11369	14
S11370	14
S11371	14
S11372	14
S11373	14
S11374	15
S11375	15
S11376	16
S11377	16
S11378	17
S11379	17
S11380	17
S11381	17
S11382	17
S11400	30
S11401	30
S11402	25
S11403	25
S11404	25
S11405	25
S11406	26
S11407	26
S11408	26
S11409	26
S11410	30
S11411	30
S11412	30
S11413	30
S11414	28
S11415	28
S11416	28
S11417	28
S11420	45
S11421	37
S11423	34
S11424	34
S11425	34
S11500	9
S11501	9
S11502	9
S11503	10
S11504	10
S11505	9
S11506	9
S11507	9
S11508	10
S11509	10
S11510	9
S11511	9
S11512	9
S11513	10
S11514	10
S11540	42
S11541	42
S11542	42
S11543	42
S11550	85
S11551	85
S11552	85
S11553	85
S11554	85
S11800	63
S11801	63
S11820	63

Item	Page
S11821	63
S11822	63
S11824	63
S11825	63
S11900	99
S11901	99
S11902	99
S11903	99
S11904	99
S11905	99
S11906	99
S11907	99
S11908	99
S11909	99
S11910	95
S11911	95
S11912	95
S11913	95
S11914	95
S11915	95
S11916	95
S11917	95
S11920	94
S11921	94
S11922	94
S11923	94
S11924	93
S11926	97
S11927	97
S11930	104
S11931	104
S11932	104
S11933	104
S11934	104
S11935	104
S11936	104
S11937	104
S11938	104
S11939	104
S11940	104
S11941	104
S11942	104
S11943	104
S11944	104
S12100	11
S12101	11
S12102	11
S12103	11
S12104	11
S12105	11
S12106	12
S12107	12
S12108	12
S12109	12
S12110	12
S12111	13
S12112	13
S12113	13
S12210	53
S12211	53
S12212	53
S12213	53
S12214	53
S12215	53
S12216	53
S12217	53
S12240	54
S12241	54

Item	Page
S12242	54
S12243	54
S12250	54
S12251	54
S12252	54
S12253	54
S29761	54
S13100	36
S13101	36
S13102	36
S13103	36
S13104	36
S13105	36
S13106	36
S13107	36
S13108	36
S13109	36
S13110	36
S13111	36
S13113	79
S13114	79
S13115	79
S13118	74
S13119	74
S13120	76
S13121	76
S13122	76
S13123	75
S13124	75
S14984	39
S14985	39
S14986	39
S14987	39
S14988	39
S14989	39
S15011	27
S15012	27
S16400	107
S16401	107
S16402	107
S16403	107
S16404	107
S16405	107
S16406	107
S16407	107
S16408	107
S16409	107
S16410	107
S16411	107
S16412	107
S16413	107
S16414	107
S16415	107
S16416	107
S16417	107
S16418	107
S16419	107
S16420	107
S16421	107
S16422	107
S16423	107
S16424	107
S16425	107
S16426	107
S16427	107
S16500	105
S16501	105
S16502	105

Item	Page
S16503	105
S16504	105
S16505	105
S18400	84
S18401	84
S18402	84
S18403	84
S18404	84
S18450	100
S18451	100
S18452	100
S18453	100
S21100	7
S21101	7
S21102	7
S21103	7
S21104	7
S21400	88
S21401	88
S21402	88
S21403	88
S21404	88
S21405	88
S21406	88
S21407	88
S21700	21
S21701	21
S21702	21
S21703	21
S21704	21
S21705	21
S21706	21
S21707	21
S21708	14
S21709	15
S21710	21
S21711	21
S21712	10
S21713	10
S21714	10
S21720	22
S21721	22
S21722	22
S21723	22
S21724	22
S21725	22
S21726	22
S21727	22
S21728	21
S21729	14
S21730	21
S21731	22
S21732	22
S21733	21
S21734	10
S21735	22
S21736	22
S21737	12
S21738	12
S21739	12
S21740	12
S21741	59
S21742	59
S21743	59
S21800	39
S21801	39
S21802	39
S21803	39

Item	Page
S21804	39
S21805	39
S21806	39
S21807	39
S22431	20
S22432	20
S22433	20
S22703	23
S22707	23
S22712	23
S22713	23
S23403	23
S23407	23
S23412	23
S23413	23
S28491	43
S28492	43
S28493	44
S28547	43
S28557	25
S28558	25
S28560	28
S28561	28
S28562	28
S28563	28
S28574	41
S28575	41
S28576	41
S28577	43
S28578	43
S28579	43
S28580	44
S28593	25
S28594	25
S28595	41
S28596	43
S28597	44
S28602	61
S28613	21
S28614	22
S28617	41
S28618	41
S28619	43
S28680	61
S28681	61
S28682	61
S28683	61
S28684	62
S28685	62
S28686	62
S28687	62
S28690	98
S28691	98
S28692	98
S28693	98
S28694	98
S28695	98
S28696	98
S28697	98
S28698	98
S28710	71
S28711	71
S28712	71
S28713	71
S28714	71
S28715	71
S28716	71
S28717	71

Item	Page
S28725	84
S28726	84
S28727	84
S28728	84
S28729	84
S28765	31
S28766	31
S28767	31
S28768	31
S28769	32
S28770	32
S28785	33
S28786	33
S28787	33
S28788	33
S28789	34
S28790	34
S28850	8
S28931	77
S28932	77
S28937	77
S28938	77
S28976	83
S29188	45
S29312	66
S29313	66
S29314	66
S29315	66
S29400	46
S29401	46
S29402	46
S29403	46
S29404	46
S29405	46
S29406	46
S29407	46
S29408	46
S29409	46
S29410	47
S29411	47
S29412	47
S29413	47
S29414	47
S29415	47
S29416	47
S29417	47
S29418	47
S29419	47
S29420	47
S29421	47
S29422	47
S29423	47
S29424	47
S29425	47
S29426	47
S29427	47
S29428	47
S29429	47
S29430	47
S29431	47
S29432	47
S29433	47
S29434	47
S29435	47
S29436	47
S29437	47
S29438	47
S29439	47

Item	Page
S29440	48
S29441	48
S29442	48
S29443	48
S29444	48
S29445	48
S29446	48
S29447	48
S29448	48
S29449	48
S29450	48
S29451	48
S29452	48
S29453	48
S29454	48
S29455	48
S29456	48
S29457	48
S29548	61
S29549	61
S29558	28
S29563	12
S29589	28
S29596	28
S29597	28
S29614	43
S29615	44
S29618	41
S29619	41
S29625	43
S29626	43
S29628	45
S29629	29
S29697	61
S29699	29
S29760	54
S29761	54
S29764	54
S29765	54
S29804	31
S29805	33
S29810	31
S29811	31
S29812	31
S29813	31
S29814	31
S29815	33
S29816	33
S29817	33
S29818	33
S29819	33
S29824	7
S29830	25
S29831	25
S29832	25
S29833	25
S29834	25
S29835	26
S29836	26
S29837	26
S29838	26
S29839	26
S29840	26
S29841	26
S29842	26
S29843	26
S29844	26
S29850	86

Item	Page
S29851	86
S29852	86
S29853	86
S29858	86
S29859	86
S29860	86
S29861	86
S29866	14
S29867	16
S29871	11
S29874	7
S29875	7
S29876	8
S29877	14
S29878	12
S29879	8
S29890	14
S29891	16
S29894	8
S29900	93
S29901	93
S29902	93
S29903	93
S29904	93
S29905	93
S29906	93
S29907	93
S29910	98
S29911	98
S29912	98
S29913	93
S29914	93
S29915	93
S29916	93
S29920	14
S29921	16
S29922	14
S29923	16
S29926	93
S29927	93
S29928	93
S29929	93
S29988	11
S29990	91
S29991	91
S29992	91
S29993	91
S38939	82
S38946	82
S38975	82
S39390	70
S39391	70
S39392	70
S39393	70
S39394	70
S39395	70
S39396	70
S39397	70
S39463	64
S39464	64
S39465	64
S39466	64
S39467	64
S39468	64
S39472	65
S39473	65
S39474	65
S39670	70

Item	Page
S39671	70
S39672	70
S39673	70
S39674	70
S39675	70
S39676	70
S39677	70
S39679	73
S39713	64
S39714	64
S39715	64
S39716	64
S39717	98
S39718	98
S39719	98
S39724	65
S39725	65
S39726	65
S39727	65
S39738	70
S39739	70
S39740	65
S39741	65
S39742	65
S39743	65
S39744	64
S39745	65
S39750	73
S39751	73
S39752	73
S39756	68
S39757	68
S39758	68
S39759	68
S39768	73
S39769	73
S39770	69
S39771	69
S39772	69
S39773	69
S39798	73
S39799	73
S39809	8
S39825	8
S39847	64
S39848	65
S39934	92
S39935	92
S39936	92
S39937	92
S39975	92
S39976	92
S39977	92
S39978	92

SATCO | NUVO

To learn more about Satco | Nuvo,
visit satco.com or contact 800-437-2826.

DISTRIBUTION CENTERS

New York (Headquarters)
110 Heartland Blvd., Brentwood, NY 11717
Tel. 631-243-2022, Fax: 631-243-2027

Texas
2000 Valwood Parkway, Farmers Branch, TX 75234
Tel. 972-247-2437, Fax: 972-247-5408

Florida
900 N.W. 159th Drive, Miami, FL 33169
Tel. 305-624-2044, Fax: 305-623-0286

California
31288 San Benito Street, Hayward, CA 94544
Tel. 510-487-4822, Fax: 510-487-8955

Washington
4710 116th S.W., Mukilteo, WA 98275
Tel. 425-789-3300, Fax: 425-789-3310

Puerto Rico
Campeche Street. 23 Julio
N. Matos Industrial Park, Carolina, PR 00984
Tel. 787-757-3510, Fax: 787-757-3540

© 2020 Satco Products, Inc.
All rights reserved
7/20 SA2000-3
$10.00