



RP

LIGHTING • FANS

CATALOG VOL. 3

**Over 30 Years  
Experience**



**Quality Product  
Priced Right**



# Apartments, Assisted Living, Dorms Your Multi-Family Specialists



**Value Engineering  
Light Commercial**



For over 30 years, RP Lighting + Fans has been a valued supplier of ceiling fans and lighting fixtures to electrical distributors and lighting showrooms. In that time our product offering has grown to encompass all types of lighting fixtures typically installed in multi-family or mixed use facilities, as well as many LED fixtures applicable for light commercial installations.











With our Headquarters located in Albuquerque, NM and several strategically placed warehouses across the country, RP provides fast and efficient delivery to our customers when and where they need it.

RP Lighting + Fans is committed to continuously expanding its catalog of quality products that our customers require. This volume 3.0 catalog presents our latest offering of energy efficient, high quality products priced right.





## Sections

	<b>Ceiling Fans.....</b>	<b>6 - 56</b>
	Fans.....	10 - 45
	Light Kits.....	46 - 50
	Controls.....	51
	Specifications.....	52 - 56
	<b>Recessed Lighting.....</b>	<b>58 - 103</b>
	Commercial Recessed.....	62 - 76
	Residential Recessed.....	78 - 96
	Recessed Alternative.....	97 - 102
	<b>Wall / Ceiling Mount.....</b>	<b>104 - 122</b>
	<b>Vanity Lighting.....</b>	<b>124 - 131</b>
	<b>Decorative Suspended.....</b>	<b>132 - 139</b>
	<b>Linear Lighting.....</b>	<b>140 - 149</b>
	<b>Exit &amp; Emergency Lighting.....</b>	<b>150 - 167</b>
	<b>Outdoor Lighting.....</b>	<b>168 - 181</b>
	<b>Step Lighting.....</b>	<b>182 - 184</b>
	<b>Track Lighting.....</b>	<b>186 - 195</b>



# Ceiling Fans





# Ceiling Fan Overview

## Contemporary Fans



**1079LED/1079-E26-L**  
**Contempo**  
3-Blade 50" Ceiling Fan  
Page 10



**1078LED/1078-E26-L**  
**Contempo I**  
3-Blade 50" Ceiling Fan  
Page 11



**1049LED/1049-E26-L**  
**Contempo II**  
3-Blade 44" Ceiling Fan  
Page 12



**1043LED**  
**Contempo IV**  
3-Blade 52" Ceiling Fan  
Page 13



**1008LED/1004-E26-L**  
**Europa**  
4-Blade 50" Ceiling Fan  
Page 14



**1007LED/1007-E26-L**  
**Europa I**  
4-Blade 50" Ceiling Fan  
Page 15



**1041LED/1041-E26-L**  
**Europa II**  
4-Blade 44" Ceiling Fan  
Page 16



**1044LED**  
**Europa IV**  
4-Blade 52" Ceiling Fan  
Page 17



**1005LED/1005-E26-L**  
**Mirage**  
5-Blade 50" Ceiling Fan  
Page 18



**1025LED/1025-E26-L**  
**Mirage I**  
5-Blade 50" Ceiling Fan  
Page 19



**1042LED/1042-E26-L**  
**Mirage II**  
5-Blade 44" Ceiling Fan  
Page 20



**1045LED**  
**Mirage IV**  
5-Blade 52" Ceiling Fan  
Page 21



**1074/1074LED**  
**Aldea II**  
3-Blade 52" Ceiling Fan  
Page 22



**1046/1046LED**  
**Aldea III**  
3-Blade 52" Ceiling Fan  
Page 23



**1071/1071LED**  
**Aldea**  
4-Blade 52" Ceiling Fan  
Page 24



# Ceiling Fan Overview

## Contemporary Fans (cont.)



**1047/1047LED**  
Aldea IV  
4-Blade 52" Ceiling Fan  
Page 25



**1065/1065LED**  
Aldea V  
5-Blade 52" Ceiling Fan  
Page 26



**1048/1048LED**  
Aldea VI  
5-Blade 52" Ceiling Fan  
Page 27



**1021**  
Sabio  
3-Blade 42" Hugger Fan  
Page 28



**1022**  
Sabio  
3-Blade 52" Hugger Fan  
Page 28



**1023**  
Metalis  
4-Blade 42" Hugger Fan  
Page 29



**1024**  
Metalis  
4-Blade 52" Hugger Fan  
Page 29



**1073/1073LED**  
Torque  
3-Blade 52" Ceiling Fan  
Page 30



**1072/1072LED**  
Colibri  
3-Blade 60" Ceiling Fan  
Page 31

## Wet Listed Fans



**1067**  
Aldea VII  
3-Blade 52" Ceiling Fan  
Page 32



**1068**  
Aldea VIII  
4-Blade 52" Ceiling Fan  
Page 33



**1069**  
Aldea IX  
5-Blade 52" Ceiling Fan  
Page 34



**1015W**  
Sunset  
5-Blade 52" Ceiling Fan  
Page 35



**1016W**  
Sunset II  
5-Blade 42" Ceiling Fan  
Page 36



# Ceiling Fan Overview

## Industrial Fans



**1070W/1080W**

**Arctic**

7-Blade 70" & 80" Ceiling Fan

Page 37



**1088/1088LED**

**Rio Grande**

3-Blade 88" Ceiling Fan

Page 38



**1091**

**Industrial Fan**

3-Blade 56" Ceiling Fan

Page 39

## Traditional Fans



**1057-L**

**Star Light**

5-Blade 52" Ceiling Fan

Page 40



**1032**

**Desert Moon**

5-Blade 52" Ceiling Fan

Page 41



**1052**

**Royal Star**

5-Blade 52" Ceiling Fan

Page 42



**1053**

**Royal Knight**

5-Blade 42" Ceiling Fan

Page 43



**1054**

**Royal Knight**

5-Blade 30" Ceiling Fan

Page 43



**1062-1**

**Royal Knight Hugger**

5-Blade 52" Hugger Fan

Page 44



**1063-1**

**Royal Knight Hugger**

5-Blade 42" Hugger Fan

Page 44



**1064-1**

**Royal Knight Hugger**

5-Blade 30" Hugger Fan

Page 44



**1051**

**Caribbean**

5-Blade 52" Ceiling Fan

Page 45

## Warranty Information



**Fan Motor**



**Integrated LED Light Kits**



**E26 A19 LED Light Kits  
Other Components**

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Contempo



- AC Motor | 3 Speed | Reversible
- 3 Plywood Blades | 12° pitch | 4" Downrod
- Pull Chain Standard
- 50" Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1079-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1079LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Brushed Nickel Motor /  
Brushed Nickel Blades



Brushed Nickel Motor /  
Walnut Blades



Black Motor / Black Blades




Oil Rubbed Bronze Motor /  
Oil Rubbed Bronze Blades



White Motor / White Blades



Matte Black Motor /  
Matte Black Blades

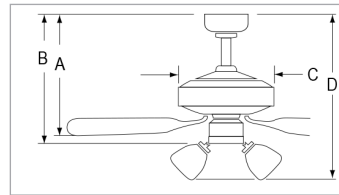

### Dimensions

1079LED	1079-E26-L
A: 10-1/4"	A: 10-1/4"
B: -	B: -
C: 10"	C: 10"
D: 15-1/4"	D: 16"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1079LED</b> <b>1079-E26-L</b>	5204	57.74	120V

### ORDERING GUIDE

Example: 1079LED-BN-BN

Model	Motor / Blade Finish
<b>1079LED-</b> 50" Sweep with integral LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel
	<b>BN-WT</b> Brushed Nickel / Walnut
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze
	<b>BK-BK</b> Black / Black
	<b>MBK-MBK</b> Matte Black / Matte Black
	<b>WW-WW</b> White / White

Example: 1079BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
<b>1079</b> 50" Sweep with E26 LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel	<b>-E26</b> socket base	<b>-L</b> A19 LED Lamps Included
	<b>BN-WT</b> Brushed Nickel / Walnut		
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze		
	<b>BK-BK</b> Black / Black		
	<b>MBK-MBK</b> Matte Black / Matte Black		
	<b>WW-WW</b> White / White		

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Contempo I



- AC Motor | 3 Speed | Reversible
- 3 Plywood Blades | 12 ° Pitch | 4" Downrod
- Pull Chain Standard
- 50" Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1078-E26-L: E26 LED Light Kit; 2x9W A19 LED lamps included, 3000K, Dimmable
- 1078LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Black Motor / Black Blades




Brushed Nickel Motor / Brushed Nickel Blades



Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades



White Motor / White Blades

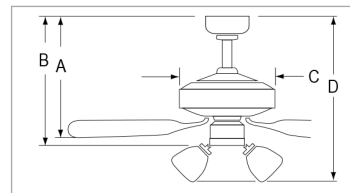

### Dimensions

1078LED	1078-E26-L
A: 10-1/2"	A: 10-1/2"
B: -	B: -
C: 10"	C: 10"
D: 15-1/4"	D: 16"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1078LED</b> <b>1078-E26-L</b>	5449	57.26	120V

### ORDERING GUIDE

Example: 1078LED-BN-BN

Model	Motor / Blade Finish
<b>1078LED-</b>	<b>BN-BN</b> Brushed Nickel / Brushed Nickel
50" Sweep with integral LED Light Kit	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze
	<b>BK-BK</b> Black / Black
	<b>WW-WW</b> White / White

Example: 1078BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
<b>1078</b>	<b>BN-BN</b> Brushed Nickel / Brushed Nickel	<b>-E26</b> socket base	<b>-L</b> A19 LED Lamps Included
50" Sweep with E26 LED Light Kit	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze		
	<b>BK-BK</b> Black / Black		
	<b>WW-WW</b> White / White		

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Contempo II



- AC Motor | 3 Speed | Reversible
- 3 Plywood Blades | 12° pitch | 4" Downrod
- Pull Chain Standard
- 44" Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1049-E26-L: E26 LED Light Kit; 2x9W A19 LED lamps included, 3000K, Dimmable
- 1049LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades




Black Motor / Black Blades



Brushed Nickel Motor / Brushed Nickel Blades



White Motor / White Blades



Dimensions  
 A: 10-1/4"  
 B: -  
 C: 10"  
 D: 15-1/4"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1049LED</b> <b>1049-E26-L</b>	4361	47.71	120V

### ORDERING GUIDE

Example: 1049LED-BN-BN

Model	Motor / Blade Finish
<b>1049LED-</b>	<b>BN-BN</b> Brushed Nickel / Brushed Nickel
44" Sweep with integral LED Light Kit	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze
	<b>BK-BK</b> Black / Black
	<b>WW-WW</b> White / White

Example: 1049BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
<b>1049</b>	<b>BN-BN</b> Brushed Nickel / Brushed Nickel	<b>-E26</b> socket base	<b>-L</b> A19 LED Lamps Included
44" Sweep with E26 LED Light Kit	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze		
	<b>BK-BK</b> Black / Black		
	<b>WW-WW</b> White / White		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.



# Contempo IV



- AC Motor | 3 Speed | Reversible
- 3 Plywood blades | 12° pitch | 4" downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Integral LED Light Kit: satin white glass, 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, dimmable
- Energy Star 4.0 Compliant



Brushed Nickel Motor /  
Brushed Nickel Blades




Black Motor / Black Blades



Oil Rubbed Bronze Motor /  
Oil Rubbed Bronze Blades



White Motor / White Blades

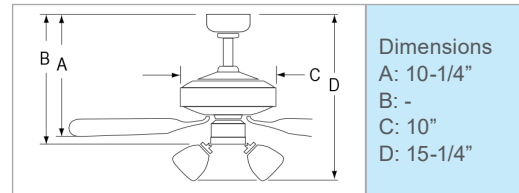

## Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1043LED</b>	5540	49	120V

## ORDERING GUIDE

Example: 1043LED-BN-BN

Model	Motor / Blade Finish
<b>1043LED-</b> 52" Sweep, with Integral LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze <b>BK-BK</b> Black / Black <b>WW-WW</b> White / White

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Europa



Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- 1004-E26-L: 50" Sweep | 153 x 15mm
- 1008LED: 50" Sweep | 153 x 15mm
- Remote and Wall Control Optional
- 1004-E26-L: E26 LED Light Kit; 2x9W A19 LED lamps included, 3000K, Dimmable
- 1008LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable; JA8/Title 24 Compliant



Brushed Nickel Motor /  
Brushed Nickel Blades



Matte Black Motor /  
Matte Black Blades



Black Motor / Black Blades




Oil Rubbed Bronze Motor /  
Oil Rubbed Bronze Blades



Brushed Nickel Motor /  
Walnut Blades



White Motor / White Blades

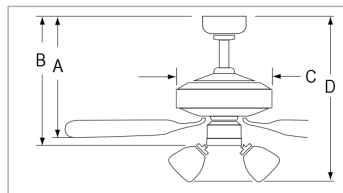

### Dimensions

1004-E26-L	1008LED
A: 10-1/4"	A: 10-1/4"
B: -	B: -
C: 10"	C: 10"
D: 16"	D: 15-1/4"

### Performance

Model Number	Energy Information at High Speed		
	Airflow CFM	Power Use Watts	Voltage
<b>1008LED</b> <b>1004-E26-L</b>	5351	61.96	120V

### ORDERING GUIDE

Example: 1008LED-BN-BN

Model	Motor / Blade Finish
<b>1008LED-</b> 50" Sweep with Integral LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel
	<b>BN-WT</b> Brushed Nickel / Walnut
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze
	<b>BK-BK</b> Black / Black
	<b>MBK-MBK</b> Matte Black / Matte Black
	<b>WW-WW</b> White / White

Example: 1004BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
<b>1004</b> 50" Sweep with E26 LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel	<b>-E26</b> socket base	<b>-L</b> A19 LED Lamps Included
	<b>BN-WT</b> Brushed Nickel / Walnut		
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze		
	<b>BK-BK</b> Black / Black		
	<b>MBK-MBK</b> Matte Black / Matte Black		
	<b>WW-WW</b> White / White		

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Europa I



1007-E26



Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 Curved Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- 50" Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1007-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1007LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Oil Rubbed Bronze Finish / Oil Rubbed Bronze Blades




Black Motor / Black Blades



Brushed Nickel Motor / Brushed Nickel Blades



White Motor / White Blades



### Dimensions

1007LED	1007-E26-L
A: 10-1/2"	A: 10-1/2"
B: -	B: -
C: 10"	C: 10"
D: 15-1/4"	D: 16"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1007LED</b> <b>1007-E26-L</b>	5300	58.66	120V

### ORDERING GUIDE

Example: 1007LED-BN-BN

Model	Motor / Blade Finish	Socket Base	Light Kit
<b>1007LED-</b> 50" Sweep with Integral LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze <b>BK-BK</b> Black / Black		
<b>1007</b> 50" Sweep with E26 LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze <b>BK-BK</b> Black / Black <b>WW-WW</b> White / White	<b>-E26</b> socket base	<b>-L</b> A19 LED Lamps Included

Example: 1007BN-BN-E26-L

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Europa II



1041-E26

Intertek

Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- 44" Sweep | 153 x 15mm
- Remote or Wall Control Optional
- 1041-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1041LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



White Motor / White Blades




Black Motor / Black Blades



Brushed Nickel Motor / Brushed Nickel Blades



Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades



Dimensions  
 A: 10-1/4"  
 B: -  
 C: 10"  
 D: 15-1/4"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1041LED</b> <b>1041-E26-L</b>	4255	49.48	120V

### ORDERING GUIDE

Example: 1041LED-BN-BN

Model	Motor / Blade Finish
<b>1041LED-</b>	<b>BN-BN</b> Brushed Nickel / Brushed Nickel
44" Sweep with Integral LED Light Kit	<b>BK-BK</b> Black / Black
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze
	<b>WW-WW</b> White / White

Example: 1041BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
<b>1041</b>	<b>BN-BN</b> Brushed Nickel / Brushed Nickel	<b>-E26</b> socket base	<b>-L</b> A19 LED Lamps Included
44" Sweep with E26 LED Light Kit	<b>BK-BK</b> Black / Black		
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze		
	<b>WW-WW</b> White / White		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Europa IV



- AC Motor | 3-Speed | Reversible
- 4 Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 172 x 14mm
- Remote or Wall Control Optional
- Energy Star 4.0 Listed
- Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Brushed Nickel Motor /  
Brushed Nickel Blades




White Motor / White Blades



Black Motor / Black Blades



Oil Rubbed Bronze Motor /  
Oil Rubbed Bronze Blades

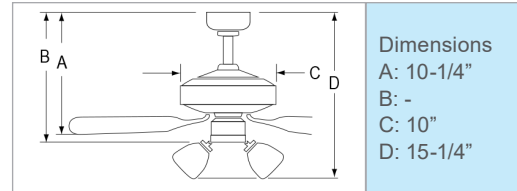

## Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1044LED</b>	5454	49.21	120V

## ORDERING GUIDE

Example: 1044LED-BN-BN

Model	Motor / Blade Finish
<b>1044LED-</b>	<b>BN-BN</b> Brushed Nickel / Brushed Nickel
52" Sweep, AC Motor, Pull Chain, with Integral LED Light Kit	<b>BK-BK</b> Black / Black
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze
	<b>WW-WW</b> White / White



# Mirage



- AC Motor | 3-Speed | Reversible
- 5 Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Remote Control Optional
- 50" Sweep | 153 x 15mm
- 1005-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1005LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Brushed Nickel Motor /  
Brushed Nickel Blades



Matte Black Motor /  
Matte Black Blades



Black Motor / Black Blades




Oil Rubbed Bronze Motor /  
Oil Rubbed Bronze Blades



White Motor / White Blades



Brushed Nickel Motor /  
Walnut Blades



### Dimensions

1005LED	1005-E26-L
A: 10-1/4"	A: 10-1/4"
B: -	B: -
C: 10"	C: 10"
D: 15-1/4"	D: 16"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1005LED</b> <b>1005-E26-L</b>	5149	59.6	120V

### ORDERING GUIDE

Example: 1005LED-BN-BN

Model	Motor / Blade Finish
<b>1005LED-</b> 50" Sweep with integral LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel
	<b>BN-WT</b> Brushed Nickel / Walnut
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze
	<b>BK-BK</b> Black / Black
	<b>MBK-MBK</b> Matte Black / Matte Black
	<b>WW-WW</b> White / White

Example: 1005BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
<b>1005</b> 50" Sweep with E26 LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel	<b>-E26</b> socket base	<b>-L A19 LED</b> Lamps Included
	<b>BN-WT</b> Brushed Nickel / Walnut		
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze		
	<b>BK-BK</b> Black / Black		
	<b>MBK-MBK</b> Matte Black / Matte Black		
	<b>WW-WW</b> White / White		

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Mirage I



- AC Motor | 3-Speed | Reversible
- 5 Curved Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Remote or Wall Control Optional
- 50" Sweep | 153 x 15mm
- 1025-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1025LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Brushed Nickel Motor /  
Brushed Nickel Blades




Black Motor / Black Blades



Oil Rubbed Bronze Motor /  
Oil Rubbed Bronze Blades



White Motor / White Blades



### Dimensions

1025LED	1025-E26-L
A: 10-1/2"	A: 10-1/2"
B: -	B: -
C: 10"	C: 10"
D: 15-1/4"	D: 16"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1025LED</b> <b>1025-E26-L</b>	5246	59.23	120V

### ORDERING GUIDE

Example: 1025LED-BN-BN

Model	Motor / Blade Finish
<b>1025LED-</b> 50" Sweep with integral LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>BK-BK</b> Black / Black <b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze <b>WW-WW</b> White / White

Example: 1025BN-BN-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
<b>1025</b> 50" Sweep with E26 LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze <b>WW-WW</b> White / White	<b>-E26</b> socket base	<b>-L</b> A19 LED Lamps Included

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Mirage II



- AC Motor | 3-Speed | Reversible
- 5 Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Remote or Wall Control Optional
- 44" Sweep | 153 x 12mm
- 1042-E26-L: E26 LED Light Kit: 2x9W A19 LED lamps included, 3000K, Dimmable
- 1042LED: Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades




Brushed Nickel Motor / Walnut Blades



Brushed Nickel Motor / Brushed Nickel Blades



White Motor / White Blades



Dimensions  
 A: 10-1/4"  
 B: -  
 C: 10"  
 D: 15-1/4"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1042LED</b> <b>1042-E26-L</b>	4020	48.63	120V

### ORDERING GUIDE

Example: 1042LED-BN-WT

Model	Motor / Blade Finish
<b>1042LED-</b>	<b>BN-BN</b> Brushed Nickel / Brushed Nickel
44" Sweep with integral LED Light Kit	<b>BN-WT</b> Brushed Nickel / Walnut
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze
	<b>WW-WW</b> White / White

Example: 1042BN-WT-E26-L

Model	Motor / Blade Finish	Socket Base	Light Kit
<b>1042</b>	<b>BN-BN</b> Brushed Nickel / Brushed Nickel	<b>-E26</b> socket base	<b>-L</b> A19 LED Lamps Included
44" Sweep with E26 LED Light Kit	<b>BN-WT</b> Brushed Nickel / Walnut		
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze		
	<b>WW-WW</b> White / White		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Mirage IV



- AC Motor | 3-Speed | Reversible
- 5 Plywood Blades | 12° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 172 x 14mm
- Remote or Wall Control Optional
- Energy Star 4.0 Listed
- Integral LED Light Kit: 16W, 1302 lms (source), 822 lms (delivered), 3000K, 90 CRI, Dimmable



Brushed Nickel Motor /  
Brushed Nickel Blades




Black Motor / Black Blades



Oil Rubbed Bronze Motor /  
Oil Rubbed Bronze Blades



White Motor / White Blades

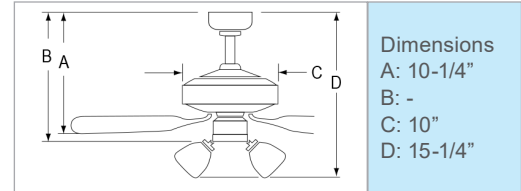

## Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1045LED</b>	5224	50.16	120V

## ORDERING GUIDE

Example: 1045LED-BN-BN

Model	Motor / Blade Finish
<b>1045LED-</b> 52" Sweep, with Integral LED Light Kit	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>BK-BK</b> Black / Black <b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze <b>WW-WW</b> White / White

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Aldea II



- AC Motor | 3-Speed | Reversible
- 3 MDF Blades | 11° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 153 x 12mm
- Remote or Wall Control Optional
- 1074: Light Kit Adaptable
- 1074LED: Integral LED Light Kit: 16 W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable



1074 Brushed Nickel Motor /  
Brushed Nickel Blades

### 1074LED



Oil Rubbed Bronze Motor /  
Walnut Blades

### 1074



Oil Rubbed Bronze Motor /  
Walnut Blades



Brushed Nickel Motor /  
Brushed Nickel Blades



Brushed Nickel Motor /  
Walnut Blades



Brushed Nickel Motor /  
Walnut Blades



White Motor /  
White Blades




White Motor /  
White Blades



Matte Black Motor /  
Matte Black Blades



Matte Black Motor /  
Matte Black Blades



### Dimensions

1074	1074LED
A: 9-3/4"	A: 9-3/4"
B: 12-1/4"	B: 13"
C: 6-7/8"	C: 6-7/8"
D: -	D: -

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1074</b>	5062	57.38	120V
<b>1074LED</b>	5062	57.45	

### ORDERING GUIDE

Example: 1074BN-BN or 1074LED-BN-BN

Model	Motor / Blade Finish	
<b>1074</b>		
52" Sweep, Pull Chain Light Kit Adaptable	<b>BN-BN</b>	Brushed Nickel / Brushed Nickel
	<b>BN-WT</b>	Brushed Nickel / Walnut
	<b>MBK-MBK</b>	Matte Black / Matte Black
	<b>OB-WT</b>	Oil Rubbed Bronze / Walnut
	<b>WW-WW</b>	White / White
<b>1074LED-</b>		
52" Sweep, Pull Chain Integrated Light Kit		

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



# Aldea III



1046

1046LED

Intertek

Fan Motor

- AC Motor | 3-Speed | Reversible
- 3 MDF Blades | 11° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 172 x 14mm
- Remote or Wall Control Optional
- 1046: Light Kit Adaptable
- 1046LED: Integral LED Light Kit: 16W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable



1046



Oil Rubbed Bronze Motor / Walnut Blades

1046LED Oil Rubbed Bronze Motor / Walnut Blades


1046LED



Brushed Nickel Motor / Brushed Nickel Blades



Brushed Nickel Motor / Brushed Nickel Blades

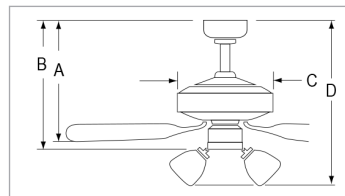

### Dimensions

1046	1046LED
A: 9-3/4"	A: 9-3/4"
B: 12-1/4"	B: 12-1/4"
C: 7-5/8"	C: -
D: -	D: 13"



Brushed Nickel Motor / Walnut Blades



Brushed Nickel Motor / Walnut Blades

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1046</b>	5538	50	120V
<b>1046LED</b>	5531	50.22	



White Motor / White Blades



White Motor / White Blades

### ORDERING GUIDE

Example: 1046BN-BN or 1046LED-BN-BN

Model	Motor / Blade Finish
<b>1046</b> 52" Sweep, Pull Chain Light Kit Adaptable	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>BN-WT</b> Brushed Nickel / Walnut <b>OB-WT</b> Oil Rubbed Bronze / Walnut <b>WW-WW</b> White / White
<b>1046LED-</b> 52" Sweep, Pull Chain Integrated Light Kit	

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Aldea



1071



Intertek



Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 MDF Blades | 11° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 153 x 12mm
- Remote or Wall Control Optional
- Light Kit Adaptable
- 1071LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable
- 1071: Title 20 Compliant



1071LED Brushed Nickel Motor /  
Brushed Nickel Blades

### 1071LED



Oil Rubbed Bronze Motor / Walnut Blades



Brushed Nickel Motor /  
Brushed Nickel Blades



Brushed Nickel Motor /  
Walnut Blades



White Motor /  
White Blades



Matte Black Motor /  
Matte Black Blades

### 1071



Oil Rubbed Bronze Motor /  
Walnut Blades




Brushed Nickel Motor /  
Walnut Blades



White Motor /  
White Blades



Matte Black Motor /  
Matte Black Blades



### Dimensions

1071	1071LED
A: 9-3/4"	A: 9-3/4"
B: 12-1/4"	B: 13"
C: 6-7/8"	C: 6-7/8"
D: -	D: -

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1071</b>	4899	57	120V
<b>1071LED</b>	4945	57.63	

### ORDERING GUIDE

Example: 1071BN-BN

Model	Motor / Blade Finish
<b>1071</b> 52" Sweep, Pull Chain	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>BN-WT</b> Brushed Nickel / Walnut <b>MBK-MBK</b> Matte Black <b>OB-WT</b> Oil Rubbed Bronze / Walnut <b>WW-WW</b> White / White
<b>1071LED-</b> 52" Sweep, Pull Chain Integrated Light Kit	

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Aldea IV



- AC Motor | 3-Speed | Reversible
- 4 MDF Blades | 11° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 172 x 14mm
- Remote or Wall Control Optional
- 1047LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable




1047LED: Brushed Nickel Motor / Walnut Blades

1047



Brushed Nickel Motor / Walnut Blades


1047LED



Brushed Nickel Motor / Brushed Nickel Blades



Brushed Nickel Motor / Brushed Nickel Blades

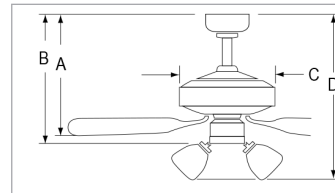

### Dimensions

1047	1047LED
A: 9-3/4"	A: 9-3/4"
B: 12-1/4"	B: 12-1/4"
C: 7-5/8"	C: -
D: -	D: 13"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1047</b>	5400	50.4	120V
<b>1047LED</b>	5420	50.5	



Oil Rubbed Bronze Motor / Walnut Blades



Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades



White Motor / White Blades

### ORDERING GUIDE

Example: 1047BN-BN or 1047LED-BN-BN

Model	Motor / Blade Finish
<b>1047</b> 52" Sweep, Pull Chain Light Kit Adaptable	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>BN-WT</b> Brushed Nickel / Walnut <b>OB-WT</b> Oil Rubbed Bronze / Walnut <b>WW-WW</b> White / White
<b>1047LED-</b> 52" Sweep, Pull Chain Integrated Light Kit	

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Aldea V



- AC Motor | 3-Speed | Reversible
- 52" Sweep | 153 x 12mm
- 1065LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable
- 5 MDF Blades | 11° pitch | 4" downrod
- Remote or Wall Control Optional
- Pull Chain Standard



1065LED: Brushed Nickel Motor / Brushed Nickel Blades



Brushed Nickel Motor / Brushed Nickel Blades



Brushed Nickel Motor / Walnut Blades



Brushed Nickel Motor / Walnut Blades



Oil Rubbed Bronze Motor / Walnut Blades




Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades



White Motor / White Blades

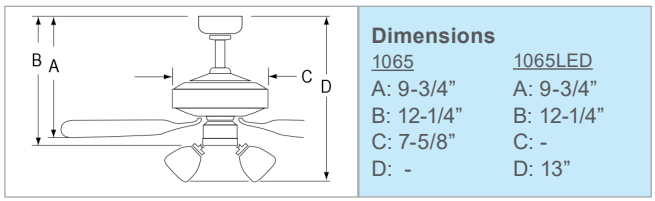

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1065</b> <b>1065LED</b>	5156	58.64	120V

### ORDERING GUIDE

Example: 1065BN-BN or 1065LED-BN-BN

Model	Motor / Blade Finish
<b>1065</b> 52" Sweep, Pull Chain Light Kit Adaptable	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>BN-WT</b> Brushed Nickel / Walnut <b>OB-WT</b> Oil Rubbed Bronze / Walnut <b>WW-WW</b> White / White
<b>1065LED-</b> 52" Sweep, Pull Chain Integrated Light Kit	

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Aldea VI



1048

1048LED

Intertek

Fan Motor

- AC Motor | 3-Speed | Reversible
- 52" Sweep | 172 x 14mm
- 5 MDF Blades | 11° pitch | 4" downrod
- Remote or Wall Control Optional
- Pull Chain Standard
- 1048LED: Integral LED Light Kit: 15W, 1251 lms (sourced), 983 lms (delivered), 3000K, 90 CRI, Dimmable



1048LED: Brushed Nickel Motor / Walnut Blades

1065



Brushed Nickel Motor / Walnut Blades


1065LED



Brushed Nickel Motor / Brushed Nickel Blades



Brushed Nickel Motor / Brushed Nickel Blades

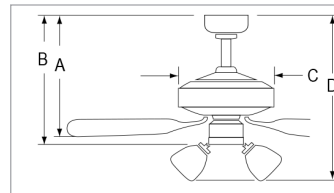

### Dimensions

1065	1065LED
A: 9-3/4"	A: 9-3/4"
B: 12-1/4"	B: 12-1/4"
C: 7-5/8"	C: -
D: -	D: 13"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
1048	5314	51	120V
1048LED	5333	51	



Oil Rubbed Bronze Motor / Walnut Blades



Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades



White Motor / White Blades

### ORDERING GUIDE

Example: 1048BN-BN or 1048LED-BN-BN

Model	Motor / Blade Finish
<b>1048</b> 52" Sweep, Pull Chain Light Kit Adaptable	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>BN-WT</b> Brushed Nickel / Walnut <b>OB-WT</b> Oil Rubbed Bronze / Walnut <b>WW-WW</b> White / White
<b>1048LED-</b> 52" Sweep, Pull Chain Integrated Light Kit	

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



# Sabio



- AC Motor | 3-speed | Reversible
- 3 MDF Blades | 12° pitch | Hugger
- Pull Chain Standard
- 1021-PC: 42" Sweep | 153 x 9mm
- 1022-PC: 52" Sweep | 153 x 14mm
- Remote or Wall Control Optional
- Integral LED Light Kit: 15W, 1521 lms (source), 789 lms (delivered), 3000K, 80 CRI, Dimmable



Brushed Nickel Motor / Walnut Blades




Brushed Nickel Motor / Brushed Nickel Blades



Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades

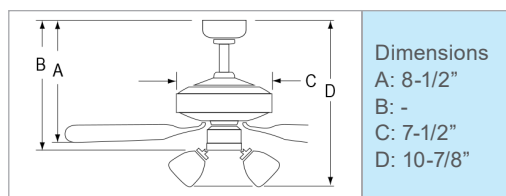

Dimensions  
 A: 8-1/2"  
 B: -  
 C: 7-1/2"  
 D: 10-7/8"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1021-PC</b>	3214	43.57	120V
<b>1022-PC</b>	4498	55.94	

### ORDERING GUIDE

Example: 1021BN-BN-PC

Model	Motor / Blade Finish	Control
<b>1021</b> 42" Sweep Hugger	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>BN-WT</b> Brushed Nickel / Walnut <b>OB-WT</b> Oil Rubbed Bronze / Walnut <b>WW-WW</b> White / White	<b>-PC</b> Pull chain included
<b>1022</b> 52" Sweep Hugger		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Metalis



- AC Motor | 4-speed | Reversible
- 4 MDF Blades | 12° pitch | Hugger
- Pull Chain Standard
- 1023-PC: 42" Sweep | 153 x 9mm
- 1024-PC: 52" Sweep | 153 x 14mm
- Remote or Wall Control Optional
- Integral LED Light Kit: 15W, 1521 lms (source), 789 lms (delivered), 3000K, 80 CRI, Dimmable



Brushed Nickel Motor / Walnut Blades




Brushed Nickel Motor / Brushed Nickel Blades



Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades

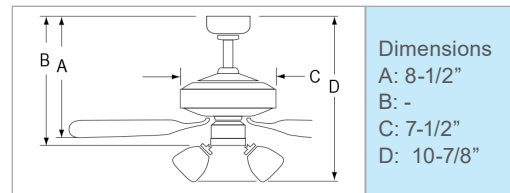

## Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1023-PC</b>	3002	42.83	120V
<b>1024-PC</b>	4486	56.79	

## ORDERING GUIDE

Example: 1024BN-BN-PC

Model	Motor / Blade Finish	Control
<b>1023</b> 42" Sweep Hugger	<b>BN-BN</b> Brushed Nickel / Brushed Nickel <b>BN-WT</b> Brushed Nickel / Walnut <b>OB-WT</b> Oil Rubbed Bronze / Walnut <b>WW-WW</b> White / White	<b>-PC</b> Pull chain included
<b>1024</b> 52" Sweep Hugger		

Specifications and dimensions subject to change.  
 Lumens are delivered unless otherwise noted.  
 See website for most current information.

# Torque



- AC Motor | 3 Speed | Reversible
- 3 Wood blades | 11° pitch | 4" downrod
- Pull Chain Standard
- 52" Sweep | 153 x 18 mm
- Remote or Wall Control Optional
- 1073LED-PC: Integral LED Light Kit: 16W, 1293 lms (source), 908 lms (delivered), 3000K, 90 CRI, Dimmable



1073LED-PC Brushed Nickel Motor / Maple Blades

1073-PC



Oil Rubbed Bronze Motor / Walnut Blades


1073LED-PC



Oil Rubbed Bronze Motor / Walnut Blades



Brushed Nickel Motor / Maple Blades

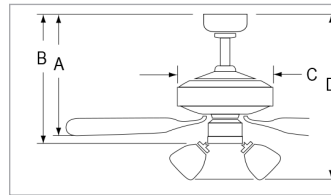

### Dimensions

1073-PC	1073LED-PC
A: 9-1/2"	A: 9-1/2"
B: 12"	B: -
C: 6-1/2"	C: 6-1/2"
D: -	D: 13"

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1073-PC</b> <b>1073LED-PC</b>	5666	60	120V

### ORDERING GUIDE

Example: 1073BN-WT-PC or 1073LED-BN-NM-PC

Model	Motor / Blade Finish	Pull Chain
<b>1073</b> 52" Sweep, Pull Chain	<b>BN-NM</b> Brushed Nickel / Natural Maple <b>OB-WT</b> Oil Rubbed Bronze / Walnut	<b>-PC</b> Pull Chain included
<b>1073LED-</b> 52" Sweep, Pull Chain with Integral LED Light Kit		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Colibri



- AC Motor | 3 Speed | Reversible
- 60" Sweep | 188 x 12mm
- 3 ABS blades | 11° pitch | 4" downrod
- Remote or Wall Control Optional
- Pull Chain Standard
- 1072LED-PC: Integrated LED Light Kit: 15W LED, 1461 lms (source), 1018 lms (delivered), 3000K, 90 CRI, Dimmable



1072LED-PC Brushed Nickel Motor / Natural Maple Blades

1072-PC



Oil Rubbed Bronze Motor / Walnut Blades


1072LED-PC



Oil Rubbed Bronze Motor / Walnut



Brushed Nickel Motor / Maple Blades

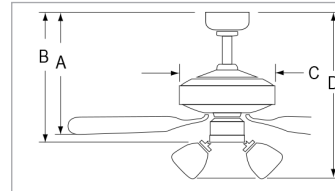

### Dimensions

1072-PC	1072LED-PC
A: 8-1/2"	A: 9-31-32"
B: 11-1/2"	B: 13"
C: 9-1/4"	C: 9"
D: -	D: -

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1072-PC</b>	7827	65.46	120V
<b>1072LED-PC</b>	7681	61.18	

## ORDERING GUIDE

Example: 1072BN-NM-PC or 1072LED-BN-NM

Model	Motor / Blade Finish	Pull Chain
<b>1072</b> 60" Sweep		
<b>1072LED-</b> 60" Sweep with Integral LED Light Kit	<b>BN-NM</b> Brushed Nickel / Natural Maple <b>OB-WT</b> Oil Rubbed Bronze / Walnut	<b>-PC</b> Pull Chain included

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Aldea VII



Fan Motor

- AC Motor | 3-Speed | Reversible
- 3 ABS Waterproof Blades
- 11° pitch | 4" downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Light Kit Adaptable with wet listed 1RP69LED Light Kit (sold separately)
- Wet Location Listed



Matte Black Motor /  
Matte Black Blades




Brushed Pewter Motor /  
Brushed Pewter Blades



White Motor / White Blades



Oil Rubbed Bronze Motor /  
Oil Rubbed Bronze Blades

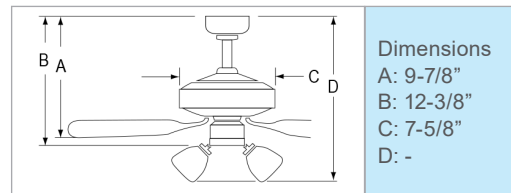

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1067</b>	5600	50.9	120V

### ORDERING GUIDE

Example: 1067BP-BP

Model	Motor / Blade Finish	
<b>1067</b> 52" Sweep, Pull Chain Light Kit Adaptable	<b>BP-BP</b>	Brushed Pewter / Brushed Pewter
	<b>MBK-MBK</b>	Matte Black / Matte Black
	<b>OB-OB</b>	Oil Rubbed Bronze / Oil Rubbed Bronze
	<b>WW-WW</b>	White / White

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



# Aldea VIII



Intertek Fan Motor

- AC Motor | 3-Speed | Reversible
- 4 ABS Waterproof Blades
- 11° pitch | 4" downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Light Kit Adaptable with wet listed 1RP69LED Light Kit (sold separately)
- Wet Location Listed



Matte Black Motor /  
Matte Black Blades




Brushed Pewter Motor /  
Brushed Pewter Blades



White Motor / White Blades



Oil Rubbed Bronze Motor /  
Oil Rubbed Bronze Blades

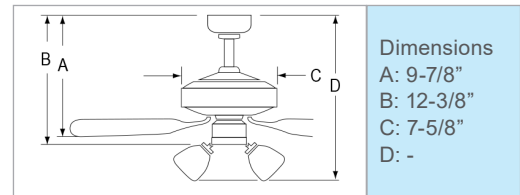

## Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1068</b>	5500	50.5	120V

## ORDERING GUIDE

Example: 1068BP-BP

Model	Motor / Blade Finish
<b>1068</b>	
52" Sweep, Pull Chain Light Kit Adaptable	<b>BP-BP</b> Brushed Pewter / Brushed Pewter <b>MBK-MBK</b> Matte Black / Matte Black <b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze <b>WW-WW</b> White / White

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Aldea IX



- AC Motor | 3-Speed | Reversible
- 5 ABS Waterproof Blades
- 11° pitch | 4" downrod
- 52" Sweep | 172 x 14mm
- Pull Chain Standard
- Remote or Wall Control Optional
- Light Kit Adaptable with wet listed 1RP69LED Light Kit (sold separately)
- Wet Location Listed




Matte Black Motor /  
Matte Black Blades




Brushed Pewter Motor /  
Brushed Pewter Blades



White Motor / White Blades



Oil Rubbed Bronze Motor /  
Oil Rubbed Bronze Blades

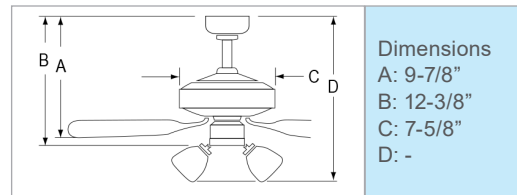

Dimensions  
A: 9-7/8"  
B: 12-3/8"  
C: 7-5/8"  
D: -

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1069</b>	5197	50.28	120V

### ORDERING GUIDE

Example: 1069BP-BP

Model	Motor / Blade Finish
<b>1069</b> 52" Sweep, Pull Chain Light Kit Adaptable	<b>BP-BP</b> Brushed Pewter / Brushed Pewter <b>MBK-MBK</b> Matte Black / Matte Black <b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze <b>WW-WW</b> White / White

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Sunset



- AC Motor | 3 Speed | Reversible
- 52" Sweep | 153 x 12mm
- 5 ABS blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Light Kit Adaptable
- Wet Location Listed



Brushed Pewter Motor /  
Brushed Pewter Blades




Matte Black Motor / Matte Black Blades



Oil Rubbed Bronze Motor / Oil Rubbed Bronze Blades



White Motor / White Blades

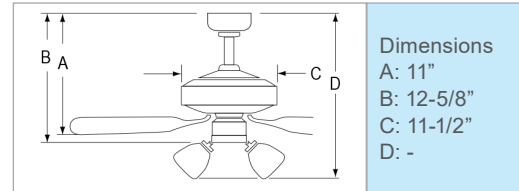

## Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1015W</b>	4246	55.78	120V

## ORDERING GUIDE

Example: 1015W-BN-BN

Model	Motor / Blade Finish
<b>1015W-</b> 52" Sweep, Wet Listed	<b>BP-BP</b> Brushed Pewter / Brushed Pewter
	<b>MBK-MBK</b> Matte Black / Matte Black
	<b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze
	<b>WW-WW</b> White / White

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Sunset II



Fan Motor


- AC Motor | 3 Speed | Reversible
- 42" Sweep | 153 x 9mm
- Light Kit Adaptable
- 5 ABS blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Wet Location Listed



Brushed Pewter Motor /  
Brushed Pewter Blades



White Motor / White Blades

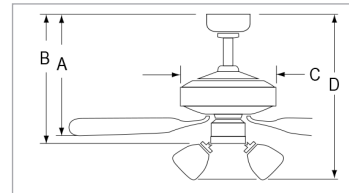

Dimensions  
A: 10"  
B: 11-1/2"  
C: 9"  
D: -

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1016W</b>	3076	46.65	120V

### ORDERING GUIDE

Example: 1016W-BP-BP

Model	Motor / Blade Finish
<b>1016W-</b> 42" Sweep, Wet Listed	<b>BP-BP</b> Brushed Pewter / Brushed Pewter <b>WW-WW</b> White / White

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Arctic



- DC Motor | 5-Speed | Reversible
- 7 Aluminum Blades | 18° pitch
- 8" & 24" downrod Included
- 1070W-WC: 70" Sweep | 180 x 17mm | WRC-70 Wall Control Included
- 1080W-WC: 80" Sweep | 180 x 17mm | WRC-80 Wall Control Included
- Energy Star 4.0 Compliant
- Wet Location Listed
- Light Kit Adaptable




Brushed Pewter Motor /  
Brushed Pewter Blades



White Motor / White Blades



Oil Rubbed Bronze Motor /  
Oil Rubbed Bronze Blades

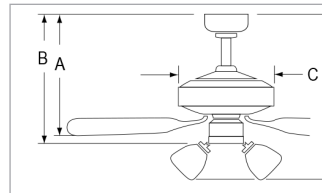

### Dimensions

1070W	1080W
A: 11-1/4"	A: 11-1/4"
B: 17-1/4"	B: 17-1/4"
C: 8-3/4"	C: 8-3/4"
D: -	D: -

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1070W</b>	10012	39.92	120V
<b>1080W</b>	11274	46.94	

### ORDERING GUIDE

Example: 1070W-BP-BP-WC

Model	Motor / Blade Finish	Control
<b>1070W-</b> 70" Sweep	<b>BP-BP</b> Brushed Pewter / Brushed Pewter <b>OB-OB</b> Oil Rubbed Bronze / Oil Rubbed Bronze <b>WW-WW</b> White / White	<b>-WC</b> wall control included
<b>1080W-</b> 80" Sweep		

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



# Rio Grande



- DC Motor | 5-Speed | Reversible
- 3 Platane Curved Wood Blades | 16° pitch | 8" & 24" downrods included
- 88" Sweep | 155 x 20mm
- WCR-88 Wall Control Included
- 1088: Not Light Kit Adaptable
- 1088LED: Integral LED Light Kit: 16W, 1521 lms (source), 551 lms (delivered), 3000K, 80 CRI, Dimmable




Oil Rubbed Bronze / Walnut Blades

### 1088LED



Oil Rubbed Bronze Motor / Walnut Blades

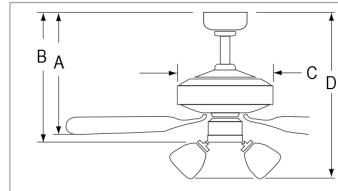

Dimensions	
1088	1088LED
A: 14"	A: 14"
B: 16-3/8"	B: 16-3/8"
C: 5-15/16"	C: 5-15/16"
D: -	D: -

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1088</b>	10956	44.37	120V
<b>1088LED</b>	10066	44.37	

### ORDERING GUIDE

Example: 1088OB-WT or 1088LED-OB-WT


Model	Motor / Blade Finish
<b>1088</b> 88" Sweep	
<b>1088LED-</b> 88" Sweep, Integral LED Light Kit	<b>OB-WT</b> Oil Rubbed Bronze / Walnut

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Industrial




- AC Motor | 1 Speed
- 3 Metal blades | 11° pitch | 12" downrod
- 56" Sweep | 194 x 16mm
- Multiple Speeds Available with Optional Wall Control
- Fan Motor: 10 Year Limited Warranty

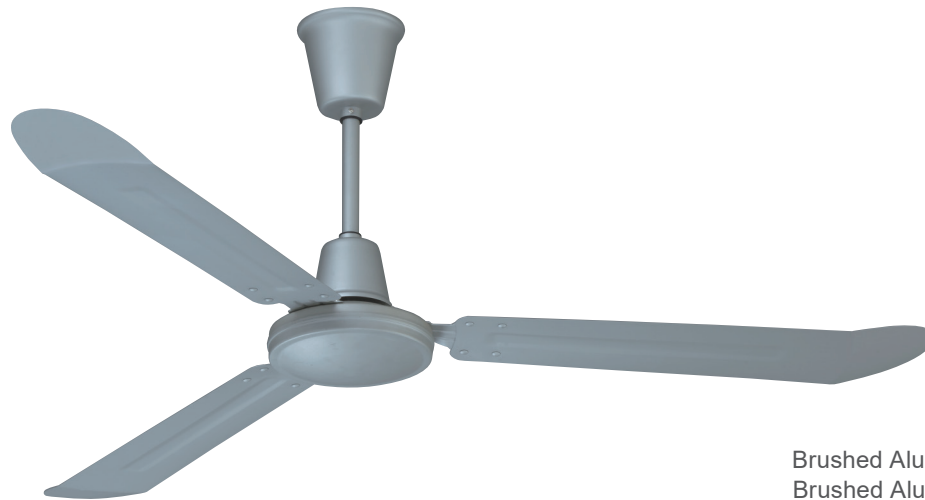

Brushed Aluminum Motor /  
Brushed Aluminum Blades



White Motor / White Blades

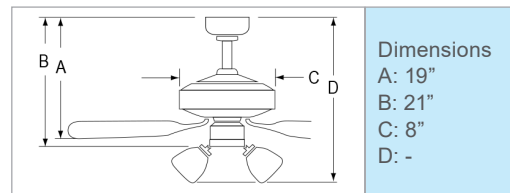

## Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1091</b>	7876	58.9	120V

## ORDERING GUIDE

Example: 1091BA-BA

Model	Motor / Blade Finish
<b>1091</b> 56" Sweep	<b>BA-BA</b> Brushed Aluminum / Brushed Aluminum <b>WW-WW</b> White / White

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Star Light



- AC Motor | 3 Speed | Reversible
- 52" Sweep | 153 x 12mm
- LED Light Kit Included: (3x) Candelabra E12 Socket, (3x) 4.5W LED bulbs included, 1050 lms (Delivered) 3000K, CRI 80, Dimmable
- 5 MDF blades | 12° pitch | 4" downrod
- Remote or Wall Control Optional
- Pull Chain Standard
- UL Listed



Matte Black Motor /  
Matte Black Blades




Brushed Nickel Finish /  
Walnut Blades



Oil Rubbed Bronze Finish /  
Walnut Blades



Matte White Finish /  
Matte White Blades

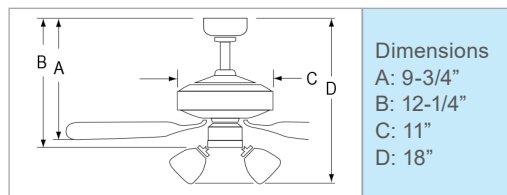

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1057-L</b>	3020	39	120V

### ORDERING GUIDE

Example: 1057BN-WT-L

Model	Motor / Blade Finish	Light Kit
<b>1057</b> 52" Sweep, AC Motor, Pull Chain	<b>BN-WT</b> Brushed Nickel / Walnut* <b>MBK</b> Matte Black / Matte Black <b>MWW</b> Matte White / Matte White <b>OB-WT</b> Oil Rubbed Bronze / Walnut**	-L : Light Kit Included

\* Brushed Nickel blade finish on one side and Walnut blade finish on other side

\*\* Oil Rubbed Bronze blade finish on one side and Walnut blade finish on other side

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Desert Moon



- AC Motor | 3 Speed | Reversible
- 52" Sweep | 172 x 14mm
- Light Kit Adaptable
- 5 MDF blades | 11.5° pitch | 4" downrod
- Pull Chain Standard
- Energy Star 4.0 Compliant
- Remote or Wall Control Optional



Brushed Nickel Motor / Natural Maple Blades



Brushed Nickel Motor / Brushed Nickel Blades



Brushed Nickel Motor / Rosewood Blades



Brushed Nickel Motor / Walnut Blades




Oil Rubbed Bronze Motor / Walnut Blades



Brushed Nickel Motor / White Blades



White Motor / White Blades

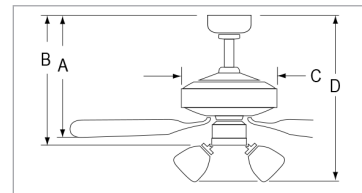

Dimensions  
 A: 11-7/8"  
 B: 12-5/8"  
 C: 11"  
 D: -

## Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1032</b>	5017	49.84	120V

## ORDERING GUIDE

Example: 1032BN-BN

Model	Motor / Blade Finish
<b>1032</b> 52" Sweep, Pull Chain	<b>BN-BN</b> Brushed Nickel / Brushed Nickel
	<b>BN-NM</b> Brushed Nickel / Natural Maple
	<b>BN-RW</b> Brushed Nickel / Rosewood
	<b>BN-WW</b> Brushed Nickel / White
	<b>BN-WT</b> Brushed Nickel / Walnut
	<b>OB-WT</b> Oil Rubbed Bronze / Walnut
	<b>WW-WW</b> White / White

Specifications and dimensions subject to change.  
 Lumens are delivered unless otherwise noted.  
 See website for most current information.

# Royal Star



Fan Motor

- AC Motor | 3 Speed | Reversible
- 52" Sweep | 153 x 12mm
- Remote or Wall Control Optional
- 5 MDF blades | 12° pitch | 4" downrod
- Pull Chain Standard
- Light Kit Adaptable




Oil Rubbed Bronze Motor / Walnut Blades



White Finish / White Blades



Brushed Nickel Finish / Natural Maple Blades

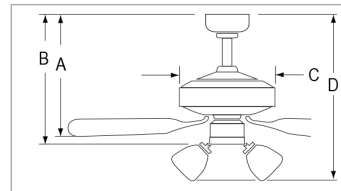

Dimensions  
 A: 10-1/16"  
 B: 11-5/8"  
 C: 11"  
 D: -

### Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1052</b>	3020	39	120V



Brushed Nickel Finish / White Blades



Brushed Nickel Finish / Brushed Nickel Blades



Brushed Nickel Finish / Walnut Blades



Brushed Nickel Finish / Rosewood Blades

### ORDERING GUIDE

Example: 1052BN-BN

Model	Motor / Blade Finish
<b>1052</b> 52" Sweep, Pull Chain	<b>BN-BN</b> Brushed Nickel / Brushed Nickel
	<b>BN-NM</b> Brushed Nickel / Natural Maple
	<b>BN-WT</b> Brushed Nickel / Walnut
	<b>BN-WW</b> Brushed Nickel / White
	<b>BN-RW</b> Brushed Nickel / Rosewood
	<b>OB-WT</b> Oil Rubbed Bronze / Walnut
	<b>WW-WW</b> White / White

Specifications and dimensions subject to change.  
 Lumens are delivered unless otherwise noted.  
 See website for most current information.



# Royal Knight




- AC Motor | 3 Speed | Reversible
- 5 MDF blades | 12° pitch | 4" downrod
- Pull Chain Standard
- 1053: 42" Sweep | 153 x 9 mm
- 1054: 30" Sweep | 153 x 9 mm
- Remote or Wall Control Optional
- Light Kit Adaptable



Brushed Nickel Motor /  
Natural Maple Blades



White Motor / White Blades

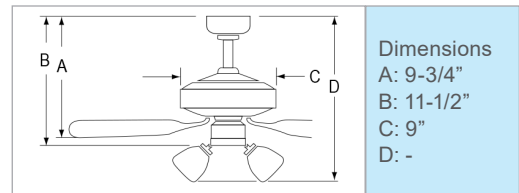

## Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1053</b>	3195	47.41	120V
<b>1054</b>	2640	28	

## ORDERING GUIDE

Example: 1054BN-BN

Model	Motor / Blade Finish
<b>1053</b> 42" Sweep, Pull Chain	<b>BN-NM</b> Brushed Nickel / Natural Maple
<b>1054</b> 30" Sweep, Pull Chain	<b>WW-WW</b> White / White

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Royal Knight Hugger



- AC Motor | 3 Speed | Reversible
- 5 MDF blades | 12° pitch
- Pull Chain Standard
- 1062-1: 52" Sweep | 153 x 15mm
- 1063-1: 42" Sweep | 153 x 12mm
- 1064-1: 30" Sweep | 153 x 12mm
- Remote or Wall Control Optional
- Light Kit Adaptable




Brushed Nickel Motor / Natural Maple Blades



Oil Rubbed Bronze Motor / Walnut Blades



White Motor / White Blades

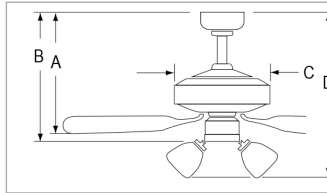

Dimensions

1062-1	1063-1	1064-1
A: 5-3/4"	A: 5"	A: 5"
B: 8-1/4"	B: 8-1/2"	B: 8-1/2"
C: 11"	C: 9-1/5"	C: 9-1/5"
D: -	D: -	D: -

Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1062-1</b>	2608	47.04	120V
<b>1063-1</b>	2684	43.83	
<b>1064-1</b>	2122	40.8	

ORDERING GUIDE

Example: 1062-1BN-NM

Model	Motor / Blade Finish
<b>1062-1</b> 52" Sweep Hugger	
<b>1063-1</b> 42" Sweep Hugger	<b>BN-NM</b> Brushed Nickel / Natural Maple <b>OB-WT</b> Oil Rubbed Bronze / Walnut <b>WW-WW</b> White / White
<b>1064-1</b> 30" Sweep Hugger	

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Caribbean



- AC Motor | 3 Speed | Reversible
- Pull Chain Standard
- Remote or Wall Control Optional
- 5 MDF blades | 12° pitch | 4" Downrod
- 52" Sweep | 153 x 12mm
- Light Kit Adaptable



Brushed Nickel Motor /  
Brushed Nickel Blades



White Motor / White Blades




Brushed Nickel Motor /  
Natural Maple Blades



Oil Rubbed Bronze Motor /  
Walnut Blades



Brushed Nickel Motor /  
Walnut Blades

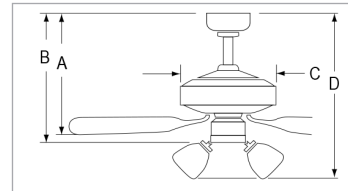

Dimensions  
A: 11-1/4"  
B: 12-3/5"  
C: 11-3/5"  
D: -

## Performance

Model Number	Energy Information at High Speed		Voltage
	Airflow CFM	Power Use Watts	
<b>1051</b>	4180	65.74	120V

## ORDERING GUIDE

Example: 1051BN-NM

Model	Motor / Blade Finish
<b>1051</b> 52" Sweep	<b>BN-BN</b> Brushed Nickel / Brushed Nickel
	<b>BN-NM</b> Brushed Nickel / Natural Maple
	<b>BN-WT</b> Brushed Nickel / Walnut
	<b>OB-WT</b> Oil Rubbed Bronze / Walnut
	<b>WW-WW</b> White / White

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Energy Star Ceiling Fan Light Kit



- 120V-60Hz
- 2 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- Shade: Satin White Glass
- Replacement Glass: 1RP8X-G
- Energy Star 4.0 Compliant
- cETLus Listed for damp location



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)



Black (BK)

White (WW)

### ORDERING GUIDE

Example: 1RP8BN-ES

Model	Finish	Energy Star
<b>1RP8</b>	<b>BN</b> Brushed Nickel	<b>-ES</b> Energy Star
	<b>BK</b> Black	
	<b>OB</b> Oil Rubbed Bronze	
	<b>WW</b> White	

- 120V - 60Hz
- 3 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- 1RP18-ES: Alabaster Glass Shade
- 1RP18-SG-ES: White Satin Glass Shade
- Replacement Glass: 1RP18G 1RP18SG
- Energy Star 4.0 Compliant
- cETLus Listed for damp location



**1RP18-SG-ES**  
Brushed Nickel (BN)



**1RP18-ES**  
White (WW)



**1RP18-ES**  
Black (BK)

**1RP18-ES**  
Oil Rubbed Bronze (OB)

### ORDERING GUIDE


Example: 1RP18BN-SG-ES

Model	Finish	Glass	Energy Star
<b>1RP18</b>	<b>BN</b> Brushed Nickel	blank Alabaster Glass <b>-SG</b> Satin Glass	<b>-ES</b> Energy Star
	<b>BK</b> Black		
	<b>OB</b> Oil Rubbed Bronze		
	<b>WW</b> White		

# Energy Star Ceiling Fan Light Kit



- 120V - 60 Hz
- 2 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- Shade: Satin White Acrylic lens
- Replacement Lens: 1RP22G
- Energy Star 4.0 Compliant
- cETLus Listed for damp location

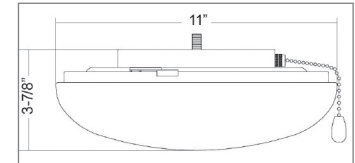

Brushed Nickel (BN)




White (WW)

## ORDERING GUIDE

Example: 1RP22BN-ES

Model	Finish	Energy Star
<b>1RP22</b>	<b>BN</b> Brushed Nickel <b>WW</b> White	<b>-ES</b> Energy Star

- 120V - 60 Hz
- 2 x 9W | E26 A19 LED | Dimmable | 3000K | 90 CRI | Lamps Included
- Shade: Satin White Glass
- Replacement Glass: 1RP82-G
- Energy Star 4.0 Compliant
- cETLus Listed for damp location

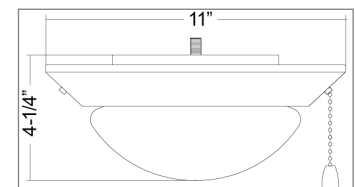

White (WW)



Oil Rubbed Bronze (OB)

## ORDERING GUIDE

Example: 1RP82BN-ES

Model	Finish	Energy Star
<b>1RP82</b>	<b>BN</b> Brushed Nickel <b>OB</b> Oil Rubbed Bronze <b>WW</b> White	<b>-ES</b> Energy Star

# Energy Star LED Light Kits



Can be added to the following Ceiling Fans: 1015W, 1016W, 1032, 1051, 1052, 1053, 1054, 1062-1, 1063-1, 1064-1, (Sold Separately)

White (WW), Brushed Nickel (BN), Brushed Pewter (BP), Black (BK) or Oil Rubbed Bronze (OB)

- 120V - 60Hz
- Dimmable
- Durable Steel and Satin Glass
- Energy Star Listed
- cETLus Listed

## 1RP31\_-LED

BN, WW

17W | 1000 lms | 3000K | 90 CRI  
W 10" x H 4-1/4"



## 1RP84\_-LED

BN, BK, OB, WW

17W | 890 lms | 3000K | 90 CRI  
W 11" x H 5"



## 1RP83\_-LED

BN, OB, WW

17W | 950 lms | 3000K | 90 CRI  
W 8" x H 2"



## 1RP88LED-\_

BN, OB, WW

17W | 1200 lms | 3000K | 90 CRI  
W 7-3/8" x H 1"  
Use with Wall or Remote control only



## 1RP89LED-\_

BN, OB

12W | 840 lms | 3000K | 90 CRI  
W 7-3/8" x H 1"  
Use with Wall or Remote control only



## 1RP69LED-\_

BP, MBK, OB, WW

12W | 700 lms | 3000K | 90 CRI  
W 7-5/8" x H 1-3/4"



## Integrated LED Light Kit

Can be added to the following Ceiling Fans: 1015W, 1016W, 1032, 1051, 1052, 1053, 1054, 1062-1, 1063-1, 1064-1, (Sold Separately)

White (WW), Brushed Nickel (BN), Brushed Pewter (BP), Black (BK) or Oil Rubbed Bronze (OB)

## 1RP32\_-LED

BN, BK, OB, WW

17W | 1040 lms | 3000K | 80 CRI  
W 11" x H 3-7/8"



## E26 LED Light Kits

Can be added to the following Ceiling Fans: 1015W, 1016W, 1032, 1051, 1052, 1053, 1054, 1062-1, 1063-1, 1064-1, (Sold Separately)

Brushed Pewter (BP), Matte Black (MBK), Oil Rubbed Bronze (OB), White (WW)

## 1RP28\_-E26-L

BP, MBK, OB, WW

Opal Glass  
120V | 3 x 9W | E26 A19 LED |  
Dimmable | 3000K | 90 CRI  
Lamps Included  
W 9-3/4" x H 5-5/8"



Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



# Light Fitters



Available in White (WW), Brushed Nickel (BN), Brushed Pewter (BP), Black (BK), Matte Black (MBK), or Oil Rubbed Bronze (OB) finishes

- 120V - 60 Hz
- E26 A19 LED | Dimmable | 3000K | 80 CRI | Lamps Included
- Match with appropriate Shade Glass (sold separately)
- cETLus Listed for damp location

**LK10\_-E26-L**  
BN, OB, WW  
1 x 9.5W E26 A19 LED



**LK12\_-E26-L**  
BP, MBK, OB, WW  
1 x 9.5W E26 A19 LED  
Wet Listed



**LK30\_-E26-L**  
BN, OB, WW  
3 x 9.5W E26 A19 LED



**LK412\_-E26-L**  
BN, OB, WW  
4 x 9.5W E26 A19 LED



## Side / Center Glass Shades

**2004CG**

2-1/4" Clear Glass  
Use with LK30-E26-L,  
LK412-E26-L



**2004FG**

2-1/4" Frosted Glass  
Use with LK30-E26-L,  
LK412-E26-L



**2015CG**

2-1/4" Clear Glass  
Use with LK30-E26-L,  
LK412-E26-L



**2015FG**

2-1/4" Frosted Glass  
Use with LK30-E26-L,  
LK412-E26-L



**2021G**

2-1/4" Opal Glass  
Use with LK30-E26-L,  
LK412-E26-L



**2061G**

2-1/4" Alabaster Glass  
Use with LK30-E26-L,  
LK412-E26-L



**3001G**

4" White Opal Schoolhouse  
Use with LK10-E26-L,  
LK12-E26-L, LK412-E26-L



Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Light Kit Covers

To be used to cover up integrated LED and E26 Light Kits when not needed.

Available in White (WW), Oil Rubbed Bronze (OB), or Brushed Nickel (BN)

## LC-WW-102

White Steel  
6-3/8" Diameter  
For use with Fans: 1021-PC, 1022-PC, 1023-PC, and 1024-PC



## LC-OB-102

Oil Rubbed Bronze Steel  
6-3/8" Diameter  
For use with Fans: 1021, 1022, 1023, 1024, and 1088LED



## LC-BN-102

Brushed Nickel Steel  
6-3/8" Diameter  
For use with Fans: 1021-PC, 1022-PC, 1023-PC, and 1024-PC



## LC-WW-79

White Steel  
8-1/3" Diameter  
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079



## LC-OB-79

Oil Rubbed Bronze Steel  
8-1/3" Diameter  
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079



## LC-BN-79

Brushed Nickel Steel  
8-1/3" Diameter  
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079




## LC-BK-79


Black Steel  
8-1/3" Diameter  
For use with Fans: 1004, 1005, 1007, 1008, 1025, 1041, 1042, 1043, 1044, 1045, 1049, 1078, and 1079



# Fan Motor Finishes



**OB-Oil Rubbed Bronze**




**BN-Brushed Nickel**




**BK-Black**



**MBK-Matte Black**



**WW-White**



**BP-Brushed Pewter  
OUTDOOR**

# Wall Controls



Most RP Lighting Fans have a Pull Chain as the standard control for 3-speed or 4-speed control. There is also a forward/reverse switch to control the flow of air for cooling or warming. RP Lighting + Fans offers a full range of wall-mounted remote controls. (Sold Separately)

## WC-3

- 2 Wire installation
- Rotary
- 4 speed fan control
- White knob included
- Face plate not included



## WC-13

- White Finish
- Single slide
- 2 Wire installation
- 4 speed fan control
- Fan up to 1.25 Amps



## WC-4

- White Finish
- Single slide
- 3 Wire installation
- 3 speed fan control
- Designed only for multiple fan use
- Fan up to 5 Amps



## WC-16

- White Finish
- Single slide
- 3 Wire installation
- 3 speed fan control
- On / Off Light Control
- Fan up to 1.25 Amps



## WC-8

- White Finish
- Dual slide
- 4 speed fan control
- 3 Wire installation
- Full range light dimming
- Compatible with LED, CFL and Incandescent



# Remote Controls



Our basic remote controls are sold separately and are adaptable to most of our fans throughout the line. They operate from a wireless radio frequency and with the touch of a button you can control the fan's three, or four, speeds and full range of light dimming from off to full bright at distances of up to 50 feet. This remote control system has a ceiling mounted receiver, a hand held 9-volt battery powered transmitter, and a wall mounting bracket.

## RC-10

- Fan / Light Remote Control
- Canopy mount
- 3 speed fan control
- Full range light dimming
- Compatible with LED, CFL
- Universal with all fans



# Downrods & Connectors

## Downrod Connector

For extra high ceilings - this coupler allows two downrods to be connected together.

Available in brushed nickel (BN), black (BK), oil rubbed bronze (OB), white (WW)



## Downrods

1/2" Diameter decorative downrods are available in a variety of sizes and finishes. For best performance and appearance, use an extension downrod with your ceiling fan when installing on a sloped ceiling.

Downrod Model # / Length		E12	E18	E24	E36	ER36*	E48	ER48*	E60	ER60*	E72
Finishes	White (WW)	X	X	X	X	X	X	X	X	X	X
	Black (BK)	X	X	X	X	X	X		X		X
	Brushed Nickel (BN)	X	X	X	X	X	X	X	X	X	X
	Oil Rubbed Bronze (OB)							X		X	

It is recommended that there is at least 7' of clearance under your ceiling fan blades - the standard 4" downrod should work in most 8' ceiling installation.

1/2" down rod connector joins two downrods together for extended lengths. Do not exceed 144" (two 72" downrods connected together is the maximum length recommended)

		Ceiling Height ( in feet)						
		9'	10'	11'	12'	13'	14'	15'
Downrod Model# / Length	12"	E12						
	18"		E18					
	24"			E24				
	36"				E36			
	48"					E48		
	60"						E60	
	72"							E72

## Tear Drops



T-09 WH



T-09 NM



T-09 BK



T-09 WT








T-09 BN

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Room Size Compatibility


Measurements are for general air flow requirements only. Decorating plans or aesthetic considerations should influence your fan choices beyond these room size specifications.

For large rooms, multiple fans are recommended.


					
Blade Sweep	80"	70"	56" - 60"	50" - 52"	30" - 42"
Approximate Room Size	20' x 20' Over 200 sq. ft.	15' x 15' Over 180 sq. ft.	12' x 15' 160-180 sq. ft.	10' x 12' 100-150 sq. ft.	6' x 8' 40-60 sq. ft.

## Hanging Systems


Tri-mount system (flush mount, standard mount and vaulted ceilings up to 45°)



**FLUSH**



**DOWNROD**



**VAULTED**

## Sloped Ceiling Adapter Kit

Slope adapters for ceiling pitch from 30° to 45°

Large ceiling mount bracket stabilizes the junction box in ceiling for a smoother and quieter performance.



**SA45 WW**



**SA45 BN**





**SA45 OB**

# Ceiling Fan Dimensions

Series	Model #	Dimensions (inches)			
		A	B	C	D
Europa	1004-E26-L	10-1/4"	--	10"	15-1/4"
Mirage	1005-E26-L	10-1/4"	--	10"	16"
Mirage	1005LED	10-1/4"	--	10"	16"
Europa I	1007-E26-L	10-1/2"	--	10"	16"
Europa I	1007LED	10-1/2"	--	10"	16"
Europa	1008LED	10-1/4"	--	10"	15-1/4"
Sunset	1015W	11"	12-5/8"	11-1/2"	--
Sunset II	1016W	10"	11-1/2"	9"	--
Sabio	1021-PC	7-1/4"	--	10-7/8"	7-1/2"
Sabio	1022-PC	7-1/4"	--	10-7/8"	7-1/2"
Metalis	1023-PC	7-1/4"	--	10-7/8"	7-1/2"
Metalis	1024-PC	7-1/4"	--	10-7/8"	7-1/2"
Mirage I	1025-E26-L	10-1/2"	--	10"	16"
Mirage I	1025LED	10-1/2"	--	10"	16"
Desert Moon	1032	11-7/8"	12-5/8"	11"	--
Europa II	1041-E26-L	10-1/4"	--	10"	15-1/4"
Europa II	1041LED	10-1/4"	--	10"	15-1/4"
Mirage II	1042E26-L	10-1/4"	--	10"	15-1/4"
Mirage II	1042LED	10-1/4"	--	10"	15-1/4"
Contempo IV	1043LED	10-1/4"	--	10"	15-1/4"
Europa IV	1044LED	10-1/4"	--	10"	15-1/4"
Mirage IV	1045LED	10-1/4"	--	10"	15-1/4"
Aldea III	1046	9-3/4"	12-1/4"	7-5/8"	-
Aldea III	1046LED	9-3/4"	12-1/4"	--	13"
Aldea IV	1047	9-3/4"	12-1/4"	7-5/8"	-
Aldea IV	1047LED	9-3/4"	12-1/4"	--	13"
Aldea VI	1048	9-3/4"	12-1/4"	7-5/8"	-
Aldea VI	1048LED	9-3/4"	12-1/4"	--	13"
Contempo II	1049-E26-L	10-1/4"	--	10"	15-1/4"
Contempo II	1049LED	10-1/4"	--	10"	15-1/4"
Caribbean	1051	11-1/4"	12-3/5"	11-3/5"	--
Royal Star	1052	10-1/16"	11-5/8"	11"	--
Royal Knight	1053	9-3/4"	11-1/2"	9"	--
Royal Knight	1054	9-3/4"	11-1/2"	9"	--
Star Light	1057-L	9-3/4"	12-1/4"	11"	18"
Royal Knight Hugger	1062-1	6-1/8"	8-1/4"	11"	--
Royal Knight Hugger I	1063-1	5"	8-1/2"	9-1/5"	--
Royal Knight Hugger I	1064-1	5"	8-1/2"	9-1/5"	--
Aldea V	1065	9-3/4"	12-1/4"	7-5/8"	-
Aldea V	1065LED	9-3/4"	12-1/4"	--	13"
Aldea VII	1067	9-7/8"	12-3/8"	7-5/8"	-
Aldea VIII	1068	9-7/8"	12-3/8"	7-5/8"	-
Aldea IX	1069	9-7/8"	12-3/8"	7-5/8"	-
Arctic	1070W	11-1/4"	17-1/4"	8-3/4"	--
Aldea	1071	9-3/4"	12-1/4"	6-7/8"	--
Aldea	1071LED	9-3/4"	--	6-7/8"	13"
Colibri	1072-PC	9-31/32"	13"	9"	--
Colibri	1072LED-PC	9-31/32"	--	9"	13-1/2"
Torque	1073-PC	9-1/2"	12"	6-1/2"	--
Torque	1073LED-PC	9-1/2"	--	6-1/2"	13"
Aldea II	1074	9-3/4"	12-1/4"	6-7/8"	--
Aldea II	1074LED	9-3/4"	--	6-7/8"	13"
Contempo I	1078-E26-L	10-1/2"	--	10"	16"
Contempo I	1078LED	10-1/2"	--	10"	16"
Contempo	1079-E26-L	10-1/4"	--	10"	16"
Contempo	1079LED	10-1/4"	--	10"	16"
Arctic	1080W	11-1/4"	17-1/4"	8-3/4"	--
Rio Grande	1088	14"	16-3/8"	5-15/16"	--
Rio Grande	1088LED	14"	16-3/8"	5-15/16"	--
Industrial	1091	19"	21"	8"	--

Dimension A and B are measured with standard downrod included with the fan.

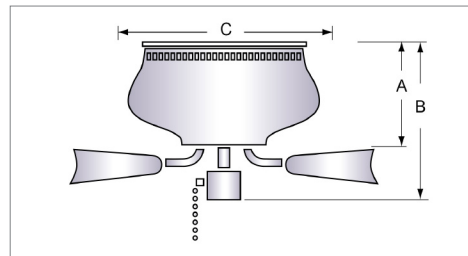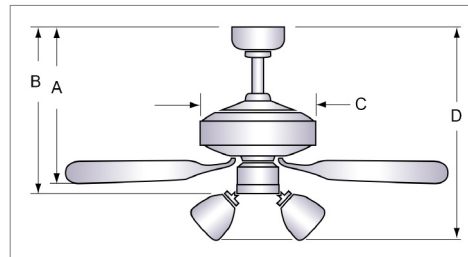

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



# Ceiling Fan Specifications

Model #	Blade Sweep	Motor Size (m/m)	Speed (RPM)		Airflow (CFM)	No. of Blades	Blades Pitch (Deg.)	Electricity Used Watts	Estimated Yearly Energy Cost	Airflow Efficiency	Amps	Capacitor
			High	Low								
1004-E26-L	50"	153 x 15	214	100	5351	4	12	61.96	11	86.4	0.52	3
1005-E26-L	50"	153 x 15	196	84	5149	5	12	59.6	11	86.4	0.5	3
1005LED	50"	153 x 15	196	84	5149	5	12	59.6	11	86.4	0.5	3
1007-E26-L	50"	153 x 15	228	109	5300	4	12	58.66	11	90.4	0.49	3
1007LED	50"	153 x 15	228	109	5300	4	12	58.66	11	90.4	0.55	3
1008LED	50"	153 x 15	214	100	5351	4	12	61.96	11	86.4	0.52	3
1015W	52"	153 x 12	166	79	4246	5	12	55.78	10	76.1	0.47	3
1016W	42"	153 x 9	220	90	3076	5	12	46.65	8	65.9	0.39	3
1021-PC	42"	153 x 9	232	97	3214	3	12	43.57	8	73.8	0.36	3
1022-PC	52"	153 x 14	189	84	4498	3	12	55.94	10	80.4	0.47	3
1023-PC	42"	153 x 9	210	84	3002	4	12	42.83	8	70.1	0.36	3
1024-PC	52"	153 x 14	177	81	4486	4	12	56.79	10	79.0	0.48	3
1025-E26-L	50"	153 x 15	204	89	5246	5	12	59.23	11	88.6	0.5	3
1025LED	50"	153 x 15	204	89	5246	5	12	59.23	11	88.6	0.5	3
1032	52"	172 x14	197	79	5017	5	11.5	49.84	9	100.7	0.47	3
1041-E26-L	44"	153 x 15	239	120	4255	4	12	49.48	10	86.0	0.42	3
1041LED	44"	153 x 15	239	120	4255	4	12	49.48	10	86.0	0.42	3
1042-E26-L	44"	153 x 12	217	111	4020	5	12	48.63	10	82.7	0.42	3
1042LED	44"	153 x 12	217	111	4020	5	12	48.63	10	82.7	0.42	3
1043LED	52"	172 x14	214	88	5540	3	12	49	9	113.1	0.46	3
1044LED	52"	172 x14	198	81	5454	4	12	49.21	9	110.8	0.46	3
1045LED	52"	172 x14	177	73	5224	5	12	50.16	9	104.1	0.47	3
1046	52"	172 x14	200	83	5538	3	11	50	9	110.8	0.45	3
1046LED	52"	172 x 14	198	81	5531	3	11	50.22	9	110.1	0.45	3
1047	52"	172 x14	184	74	5400	5	11	50.4	9	107.1	0.46	3
1047LED	52"	172 x 14	182	73	5420	5	11	50.5	9	107.3	0.46	3
1048	52"	172 x 14	171	70	5314	5	11	51	9	104.2	0.47	3
1048LED	52"	172 x 14	170	68	5333	5	11	51	9	104.6	0.47	3
1049-E26-L	44"	153 x 15	264	147	4361	3	12	47.71	10	91.4	0.41	3
1049LED	44"	153 x 15	264	147	4361	3	12	47.71	10	91.4	0.41	3
1051	52"	153 x 12	170	70	4180	5	12	65.74	11	63.6	0.53	3
1052	52"	153 x 12	162	75	3020	5	12	39	11	77.4	0.51	3
1053	42"	153 x 9	217	88	3195	5	12	47.41	8	67.4	0.4	3
1054	30"	153 x 9	280	115	2640	5	16	28	8	94.3	0.37	3
1057-L	52"	153 x 12	162	75	3020	5	12	39	11	77.4	0.51	3
1062-1	52"	153 x 15	156	74	2608	5	12	47.04	9	55.4	0.4	3
1063-1	42"	153 x 12	200	85	2684	5	12	43.83	8	61.2	0.37	3
1064-1	30"	153 x 12	307	139	2122	5	12	40.8	7	52.0	0.34	3
1065	52"	153 x 12	174	73	5156	5	11	58.64	10	87.9	0.49	3
1065LED	52"	153 x 12	174	73	5156	5	11	58.64	10	87.9	0.49	3
1067	52"	172 x 14	209	83	5600	5	11	50.9	9	110.0	0.46	3
1068	52"	172 x 14	190	73	5500	5	11	50.5	9	108.9	0.46	3
1069	52"	172 x 14	164	64	5197	5	11	50.28	9	103.4	0.46	3
1070W	70"	180 x 17	145	76	10012	7	15	39.92	7	250.8	0.58	0
1071	52"	153 x 12	195	73	4899	4	11	57	10	85.9	0.5	3
1071LED	52"	153 x 12	177	71	4945	4	11	57.63	10	85.8	0.48	3
1072-PC	60"	188 x 12	182	58	7827	3	11	65.46	11	119.6	0.54	3
1072LED-PC	60"	188 x 12	174	57	7681	3	11	61.18	11	125.5	0.538	3
1073-PC	52"	153 x 18	204	79	5666	3	11	60	10	94.4	0.5	3
1073LED-PC	52"	153 x 18	204	79	5666	3	11	60	10	94.4	0.5	3
1074	52"	153 x 12	196	78	5062	3	11	57.38	10	88.2	0.48	3
1074LED	52"	153 x 12	194	78	5062	3	11	57.45	10	88.1	0.48	3
1078-E26-L	50"	153 x 15	234	106	5449	3	12	57.26	11	95.2	0.48	3
1078LED	50"	153 x 15	234	106	5449	3	12	57.26	11	95.2	0.48	3
1079-E26-L	50"	153 x 15	229	100	5204	3	12	57.74	11	90.1	0.48	3
1079LED	50"	153 x 15	229	100	5204	3	12	57.74	11	90.1	0.48	3
1080W	80"	181 x 17	101	61	11274	7	18	46.94	9	240.2	0.66	0
1088	88"	155 x 20	102	49	10956	3	16	44.37	8	246.9	0.63	0
1088LED	88"	155 x 20	102	49	10066	3	16	44.37	8	226.9	0.63	0
1091	56"	194 x 16	310	100	7876	3	10	58.9	-	133.7	0.491	1

\*\*Except industrial fan model #1091, all ceiling fans measured airflow according to DOE test method, all estimates based on typical use, excluding lights.\*\*

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Energy Saving Features

**Oversized, Triple Mounting Systems**

and heavy duty die cast hanging ball which eliminates wobble problems and provides maximum angles up to 35° for sloped and vaulted ceiling.

Precision ground solid steel motor shaft fixed into stators, create no wobble and friction.

Self-lubrication, permanently **double sealed ball bearings**.

Pure aluminum die cast rotors provide the most energy efficiency possible.

Motor housing is stamped or die casted, **triple plated and double casted** with corrosion resistors. Housings are matched for a perfect fit.

**Heavy duty copper wiring**.

**Detachable switch housing** with pre-wired plug in connector makes installation quick and easy. Light kit adaptable.

Heavy duty, **UL approved switches** give constant speed and action through entire operation and warranty.

52" or 76" lead wire on downrod ceiling fans, virtually eliminates splicing to accommodate longer downrod.

**Maximum security**, dual locking system, Threaded coupling to fit downrod tightly **Safety cable installed**.


No motor burn out from heat built up because our 16 pole motors have fiberglass insulation and silicon steel laminations.

**Lifetime quality**, vacuum dipped and lacquered stator provides constant magnetic operation.

3 speed with reversible switch can be used for summer/winter air flow.


**DC Motors** are utilized for maximum efficiency on our largest fans (1070, 1080).

**Triple capacitors** for more silent operation.

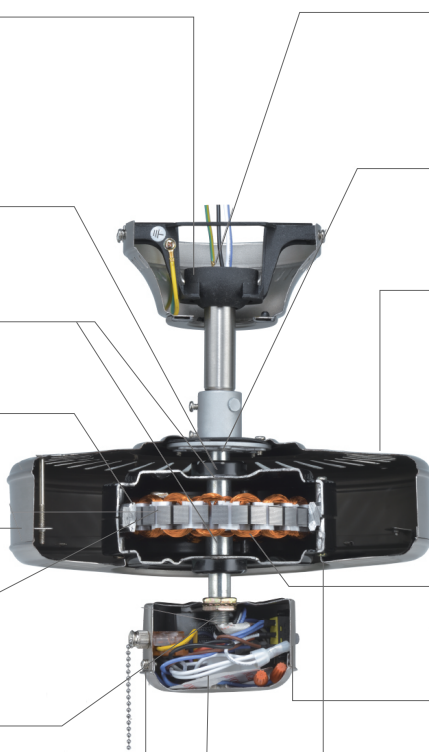


## Summer

In the warm months of summer, switch your fan to turn counter clockwise in order to make your room feel up to 7°C cooler.

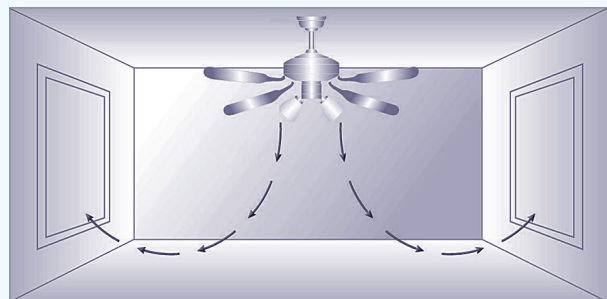

## Winter

In the cooler months of autumn and winter, switch your fan to turn clockwise in order to recirculate the hot air that has been trapped near the ceiling.

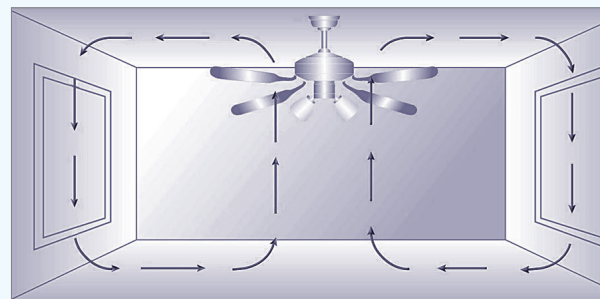







# Recessed Lighting



# Recessed Lighting Housing Overview

## Commercial Housing



**8320H**  
2" Round Frame-In LED  
Page 62



**8321H**  
2" Square Frame-In LED  
Page 62



**8120H**  
4" LED Frame-In  
Page 64




**8120HIC**  
4" LED IC Airtight Frame-In  
Page 64



**8121H**  
4" LED Architectural Housing  
Page 64



**8216FR-JB**  
4" LED 2-Hour Fire Rated  
Page 66



**8199HICA-FR**  
6" LED 2-Hour Fire Rated  
Page 68



**8122H**  
6" LED Frame-In  
Page 70



**8122HIC**  
6" LED IC Airtight Frame-In  
Page 70



**8124H**  
6" LED Architectural Housing  
Page 70



**8162H**  
6" LED High Output Architectural  
Housing  
Page 72



**8163H**  
8" LED High Output Architectural  
Housing  
Page 73



**8125H**  
8" LED Frame-In  
Page 74



**8125HIC**  
8" LED IC Airtight Frame-In  
Page 74



**8126H**  
8" LED Architectural Housing  
Page 74



**8041**  
4" Non-IC, LED Retrofit  
Page 76



**8061**  
6" Non-IC, LED Retrofit  
Page 76



**8081**  
8" Non-IC, LED Retrofit  
Page 76

For all IC Rated housing consult factory if using cellulose, blown-in or foam insulation.

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Recessed Lighting Housing Overview

## Residential Housing cont.



**8317H**  
3" LED IC Frame-In  
Page 78



**8317HR**  
3" LED IC Remodel  
Page 78



**8215HA**  
4" LED IC Airtight Frame-In  
Page 80




**8215HRA**  
4" LED IC Airtight Remodel  
Page 80



**8117HA**  
6" LED IC Airtight Shallow Frame-In  
Page 82




**8117HRA**  
6" LED IC Airtight Shallow Remodel  
Page 82



**8201HA**  
4" Airtight Frame-In  
Page 84



**8201HRA**  
4" Airtight Remodel  
Page 84



**8202HA**  
4" IC Airtight Frame-In  
Page 84



**8116HIC**  
6" LED IC Airtight Frame-In  
Page 87



**8102HAQ**  
6" IC Airtight Frame-In  
Page 88



**8102HRA**  
6" IC Airtight Remodel  
Page 88



**8104HICA**  
6" IC Airtight Shallow Frame-In  
Page 88



**8708**  
4" LED Retrofit Kit  
Page 91



**8711**  
4" LED Retrofit Trim,  
2.25" Aperture  
Page 91



**8742-2**  
4" LED Ultra-Thin Light  
Page 92



**8542-2**  
6" LED Ultra-Thin Light  
Page 92



**8842**  
3" LED Ultra-Thin Light  
Page 93



**8642**  
8" LED Ultra-Thin Light  
Page 93



**8775**  
4" IC Rated, LED Retrofit & New  
Construction J-Box Downlight  
Page 94



**8545**  
6" IC Rated, LED Retrofit & New  
Construction J-Box Downlight  
Page 95



**8776**  
4" IC Rated, LED Recessed  
Adjustable Gimbal J-Box Downlight  
Page 96

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



# Recessed Lighting Housing Overview

## Recessed Alternative



**8739**  
5" Slim Round Disk  
Page 97



**8536**  
7" Slim Round Disk  
Page 97



**8539**  
7" Slim Round Disk  
Page 97



**8748**  
5" Square Ceiling Mount  
Page 98



**8548**  
6" Square Ceiling Mount  
Page 98



**8756**  
4" Low-Profile Disk  
Page 99



**8556**  
6" Low-Profile Disk  
Page 99



**8556-S**  
6" Low-Profile Closet Light  
Page 100



**8557**  
6" LED, CCT Selectable,  
Low-Profile Disk  
Page 100



**8538**  
7" Flat Lens Disk  
Page 101



**8569**  
7" High Lumen Flat Lens Disk  
Page 101



**8554**  
9" LED Low-Profile Disk Light  
Page 102

## Warranty Information



**Integrated LED Lights**



**Other Components**

*Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.*


# 2" Frame-In LED




- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 2700K | 3000K | 80 CRI
- Beam Spread Options: 15°N | 38°M | 60°W
- Adjustable Trims: 0-30° tilt | 356° rotational
- cCSAus Listed for damp location
- 5 Year Limited Warranty
- Captive Bar Hangers Included



**8320H**  
2" Round LED Frame-In

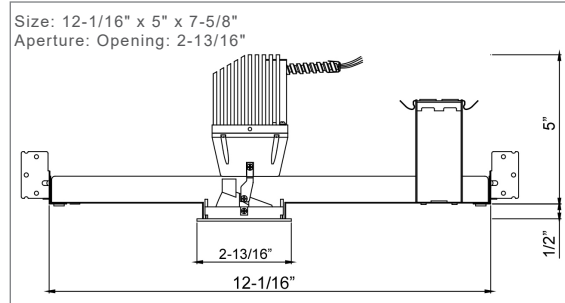

**8321H**  
2" Square LED Frame-In

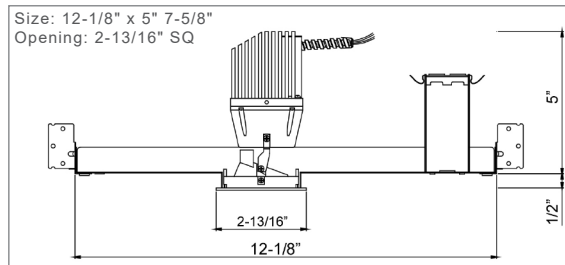

### ORDERING GUIDE

Example: 8320H-10-30-38M-EM


Model #	Wattage	Color Temp	Beam Spread	Emergency
<b>8320H</b>	-10 10W, 870lms	-27 2700K	-15N	blank no EM Option
<b>8321H</b>	-15 15W, 1200lms	-30 3000K	-38M	-EM adds Battery Pack
	-23 23W, 1800lms		-60W	

## Trims For 8320H

Wattage, lumen output, and CCT determined by housing choice.  
Check housing Ordering Guide. Trim Aperture = 2-1/4"

### 8861AJ

0-30° Tilt White Cone  
356° Rotational



**ORDERING GUIDE** Example: 8861AJ-WH


Model #	Finish
8861AJ	-WH White

## Trims For 8321H

Wattage, lumen output, and CCT determined by housing choice.  
Check housing Ordering Guide. Trim Aperture = 2-1/4"

### 8862AJ

0-30° Tilt White Cone  
356° Rotational




**ORDERING GUIDE** Example: 8862AJ-WH

Model #	Finish
8862AJ	-WH White

### 8861S

Straight White Cone




**ORDERING GUIDE** Example: 8861S-WH

Model #	Finish
8861S	-WH White

### 8862S

Straight White Cone



**ORDERING GUIDE** Example: 8862S-WH

Model #	Finish
8862S	-WH White


# 4" LED Housings




- 120V-277V Universal Voltage
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | 80+ CRI
- 14W | 1150 lms      23W | 1950 lms
- 8120H & 8121H | 4-7/8" height for 2"x 6" construction
- 8120H & 8120HIC | Captive Bar Hangers Included
- Energy Star Listed – 3000K & 4000K only
- 8120H & 8121H – cCSAus Listed
- 8120HIC – cETLus Listed
- 5 Year Limited Warranty




**8120H**  
4" LED Frame-In

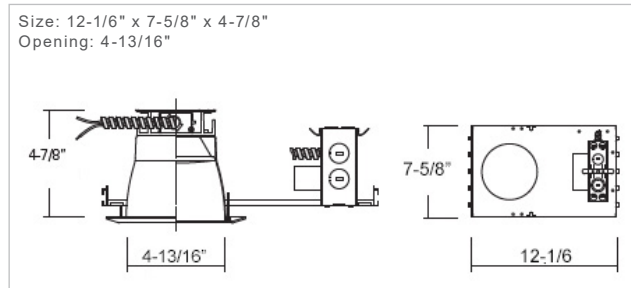

**8120HIC**  
4" LED IC Airtight Frame-In

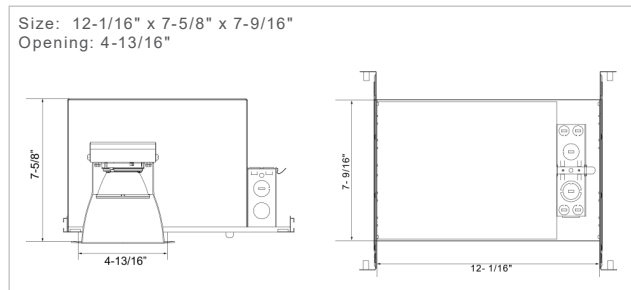

**8121H**  
4" LED Architectural Housing

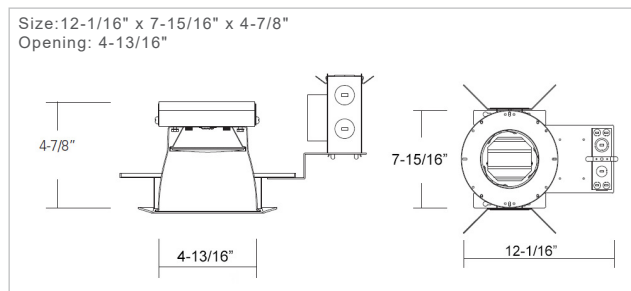

**8096B**

Optional Two Piece Bar Hanger set  
24" Joist Span



**ORDERING GUIDE**

Example: 8120HIC-14-30-EM

Model #	Wattage	CCT	Emergency
8120H	-14 14W	-30 3000K	blank no EM option
8120HIC	-23 23W	-35 3500K	EM adds EM Battery Pack
8121H		-40 4000K	
		-50 5000K	

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.


## Trims For 8120H, 8120HIC and 8121H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

**8590**



Haze Cone Reflector




**ORDERING GUIDE** Example: 8590HZ

Model #	Finish
<b>8590</b>	HZ Haze

**8586**



Haze Reflector  
with White Baffle




**ORDERING GUIDE** Example: 8586WH

Model #	Finish
<b>8586</b>	WH White

**8587**



Haze Reflector  
with White Baffle  
with lens





**ORDERING GUIDE** Example: 8587WH

Model #	Finish
<b>8587</b>	WH White

# 4" LED 2-Hour Fire Rated Emergency



- 120V | 277V Available by Special Order
- Dimmable TRIAC, 10-100%
- 50,000 Hours Projected Life
- 3000K | 4000K | 90 CRI
- IC Rated for direct contact with installation
- 4" height for 2" x 6" construction
- 1" ceiling thickness adjustment
- Captive Bar Hangers Included
- LED Trim Assembly: CSAus Listed
- Housing: cCSAus Listed for damp location
- UL 1598 rated | 2-hr fire rating UL514A

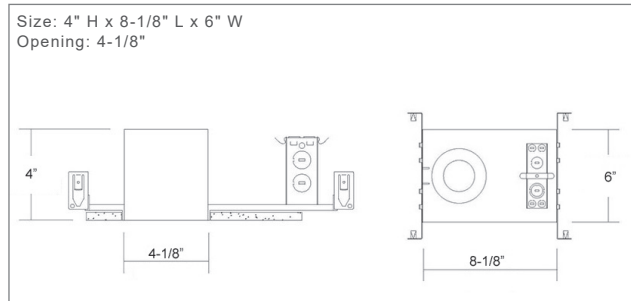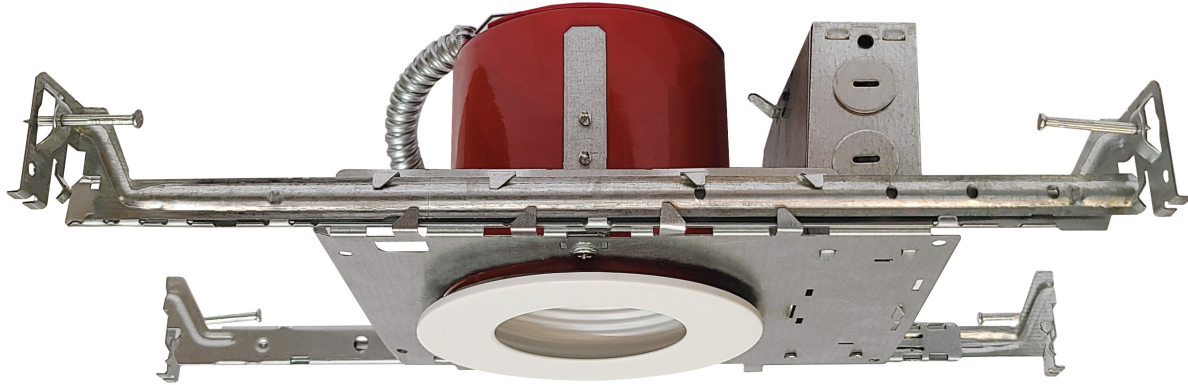

## ORDERING GUIDE

Example: 8216FR-JB-EM

Model #	Emergency	
8216FR-JB	blank -EM	no EM option added adds Battery Pack




## Trims For 8216FR-JB

277V Trims Available By Special Order. Please contact RP Lighting + Fans for information.

8763



**WET** Round Recessed Reflector  
120V | 10W | 600 lms  
3000K or 4000K  
Wet Location



### ORDERING GUIDE

Example: 8763WH-90-3K


Model #	Finish	CRI	CCT
<b>8763</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b> 3000K
	<b>BK</b> <sup>1</sup> Black		<b>-4K</b> 4000K
	<b>OB</b> Oil Rubbed Bronze		
	<b>CL</b> Clear		
	<b>WH</b> White		

<sup>1</sup>Only available in -90-3K

8769



Round Recessed White Reflector  
120V | 10W | 889 lms  
3000K



### ORDERING GUIDE


Example: 8769WH-90-3K

Model #	Finish	CRI	CCT
<b>8769</b>	<b>WH</b> White	<b>-80</b>	<b>-3K</b> 3000K

8770



**WET** 4" Recessed LED Clear Reflector  
120V | 10W | 3000K or 4000K  
80CRI: 889lms  
90CRI: 710lms



### ORDERING GUIDE


Example: 8770CL-90-3K

Model #	Finish	CRI	CCT
<b>8770</b>	<b>CL</b> Clear	<b>-80</b>	<b>-3K</b> 3000K
		<b>-90</b>	<b>-4K</b> 4000K

8771



Round Recessed White Gimbal  
120V | 10W | 895 lms  
3000K or 4000K



### ORDERING GUIDE


Example: 8771WH-90-3K

Model #	Finish	CRI	CCT
<b>8771</b>	<b>WH</b> White	<b>-90</b>	<b>-3K</b> 3000K
			<b>-4K</b> 4000K

8773



Square Recessed Module  
120V | 11W | 700 lms  
3000K or 4000K



### ORDERING GUIDE



Example: 8773WH-90-3K

Model #	Finish	CRI	CCT
<b>8773</b>	<b>WH</b> White	<b>-90</b>	<b>-3K</b> 3000K
			<b>-4K</b> 4000K

# 6" LED 2-Hour Fire Rated IC Airtight New Construction



- 120V-277V Universal Voltage
- Dimmable TRIAC, 10-100%
- 50,000 Hours Projected Life
- 3000K | 4000K | 90 CRI
- IC Rated for direct contact with installation
- 1-1/2" ceiling thickness adjustment
- Captive Bar Hangers Included
- Housing: cULus Listed; select trims wet location
- UL 1598 rated | 2-hr fire rating UL263
- ASTM-E283 Listed for Air-tight construction
- 5 Year Limited Warranty

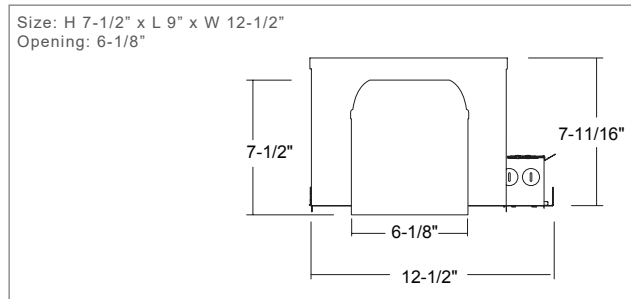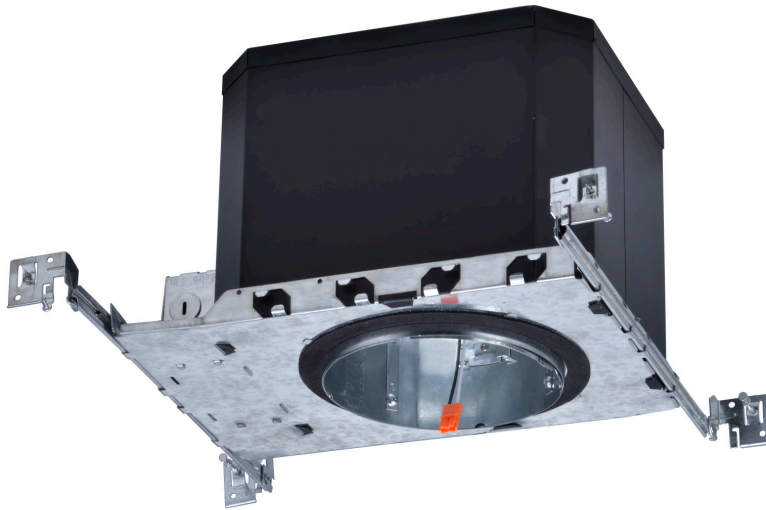

## ORDERING GUIDE

Example: 8199HICA-FR-EM

Model #	Emergency	
8199HICA-FR	blank -EM	no EM option added adds Battery Pack


## Trims For 8199HICA-FR

277V Trims Available By Special Order. Please contact RP Lighting + Fans for information.

8523



**WET** Recessed White Baffle  
120V | 12.5W |  
850 lms  
Wet Location



### ORDERING GUIDE


Example: 8523WH-90-3K

Model #	Finish	CRI	CCT
8523	WH White	-90	-3K 3000K -4K 4000K

8562



Recessed Gimbal  
120V | 13W |  
900 lms



### ORDERING GUIDE


Example: 8562WH-90-3K

Model #	Finish	CRI	CCT
8562	BN Brushed Nickel BK Black OB Oil Rubbed Bronze WH White	-80	-3K 3000K

8563



**WET** Recessed Reflector  
120V | 13W |  
795 lms  
Wet Location



### ORDERING GUIDE


Example: 8563CL-90-3K

Model #	Finish	CRI	CCT
8563	BN Brushed Nickel BK Black CL Clear OB Oil Rubbed Bronze WH White	-90	-3K 3000K

8568



**WET** Recessed High Output Reflector  
120V | 17W |  
1240 lms  
Wet Location



### ORDERING GUIDE

Example: 8568WH-90-3K


Model #	Finish	CRI	CCT
8568	BK Black CL Clear <sup>1</sup> OB Oil Rubbed Bronze WH White	-90	-3K 3000K -4K 4000K

1 - Only available in -90-3K


# 6" LED Housings




- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | 80 CRI
- 14W | 1150 lms      23W | 1950 lms
- 30W | 2720 lms      45W | 3640 lms
- 8122H & 8122HIC | Captive Bar Hangers Included
- Energy Star Listed – 3000K & 4000K only
- cCSAus Listed for damp location; select trims wet location
- 5 Year Limited Warranty

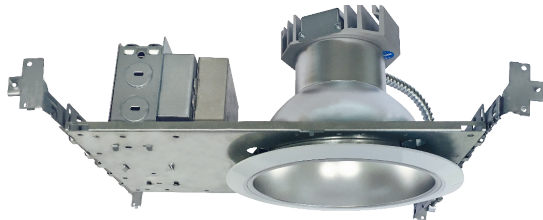


**8122H**  
6" LED Frame-In

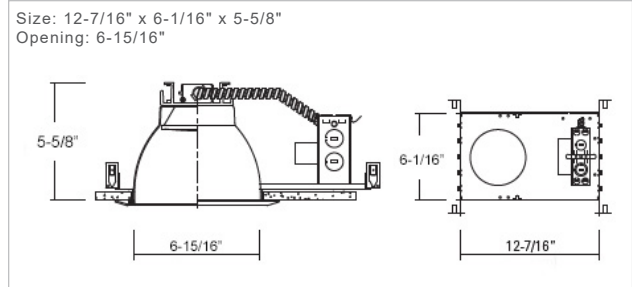

**8122HIC**  
6" LED IC Airtight Frame-In

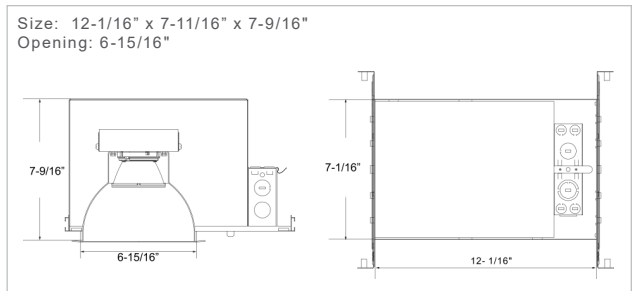

**8124H**  
6" LED Architectural Housing

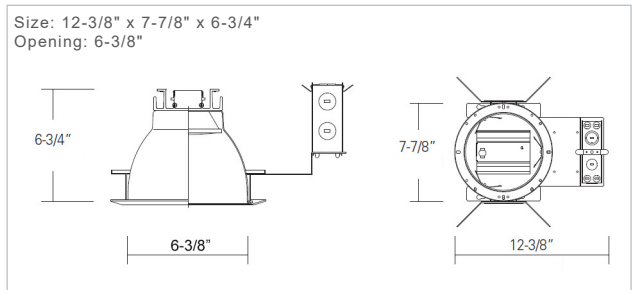

**8096B**

Optional Two Piece Bar Hanger set  
24" Joist Span



**ORDERING GUIDE**

Example: 8122H-14-40-EM

Model #	Wattage		CCT		Emergency
<b>8122H</b>	-14	14W	-30	3000K	blank no EM option
<b>8122HIC</b>	-23	23W	-35	3500K	<b>EM</b> adds Battery Pack
<b>8124H</b>	-30	30W	-40	4000K	
	-45	45W	-50	5000K	


## Trims For 8122H, 8122HIC and 8124H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

### 8651



Haze Cone Reflector




**ORDERING GUIDE** Example: 8651HZ

Model #	Finish
8651	HZ Haze

### 8652




Haze Reflector with White Baffle




**ORDERING GUIDE** Example: 8652WH

Model #	Finish
8652	WH White

### 8653



Haze Reflector with White Baffle with lens




**ORDERING GUIDE** Example: 8653WH

Model #	Finish
8653	WH White

### 8655



Haze Cone Reflector with Wall Wash




**ORDERING GUIDE** Example: 8655WH

Model #	Finish
8655	WH White

# 6" LED High Output Housing



- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 4000K | 5000K | 80 CRI
- 50W | 3438 lms      60W | 4265 lms
- 70W | 4921 lms      90W | 5798 lms
- cULus Listed for damp location
- 5 Year Limited Warranty

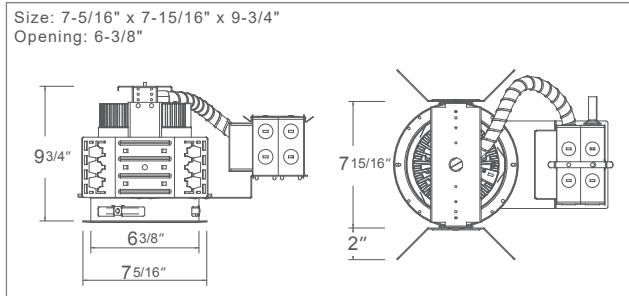

## ORDERING GUIDE


Example: 8162H-50-30-EM

Housing	Wattage	Color Temp	Emergency
<b>8162H</b>	-50 50W	-30 3000K	blank no EM option
	-60 60W	-40 4000K	<b>EM</b> adds Battery Pack
	-70 70W	-50 5000K	
	-90 90W		

## Trims For 8162H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

### 8656

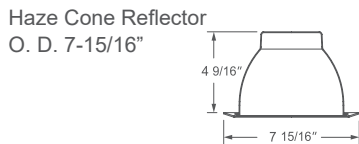


## ORDERING GUIDE

Example: 8656HZ

Model #	Finish
<b>8656</b>	HZ Haze

### 8096B

Optional Two Piece Bar Hanger set  
24" Joist Span

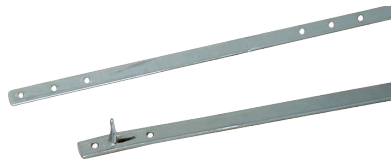




# 8" LED High Output Housing



- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 4000K | 5000K | 80 CRI
- 50W | 3438 lms
- 60W | 4265 lms
- 70W | 4921 lms
- 90W | 5798 lms
- Energy Star Listed
- cULus Listed for damp location
- 5 Year Limited Warranty

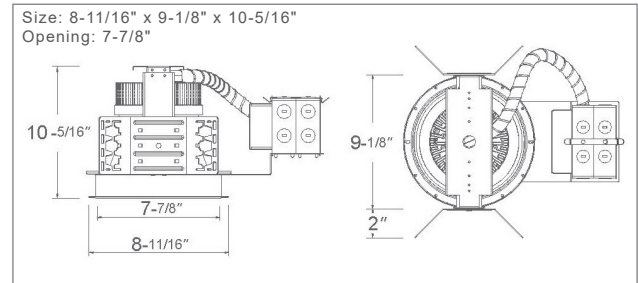

## ORDERING GUIDE

Example: 8163H-50-30-EM

Housing	Wattage	Color Temp	Emergency
<b>8163H</b>	<b>-50</b> 50W	<b>-30</b> 3000K	blank no EM option
	<b>-60</b> 60W	<b>-40</b> 4000K	<b>EM</b> adds Battery Pack
	<b>-70</b> 70W	<b>-50</b> 5000K	
	<b>-90</b> 90W		


## Trims For 8163H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

### 8676



Haze Cone Reflector  
O. D. 9-7/16"



## ORDERING GUIDE

Example: 8656HZ

Model #	Finish
<b>8656</b>	<b>HZ</b> Haze

### 8096B

Optional Two Piece Bar  
Hanger set  
24" Joist Span




Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.


# 8" LED Housings




- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | ?? CRI
- 23W | 1950 lms 30W | 2720 lms 45W | 3640 lms
- 8125H & 8125HIC | Captive Bar Hangers Included
- Energy Star Listed – 3000K & 4000K only
- cCSAus Listed for damp location; select trim wet location
- 5 Year Limited Warranty

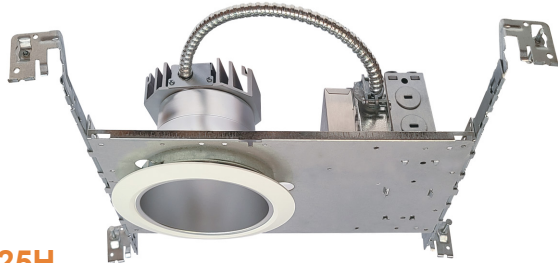


**8125H**  
8" LED Frame-In

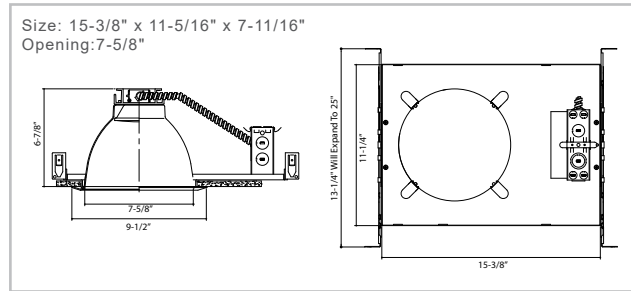

**8125HIC**  
8" LED IC Airtight Frame-In

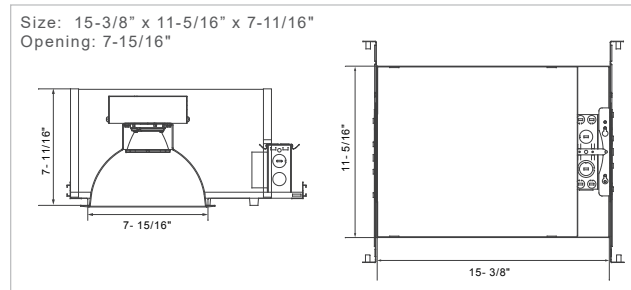

**8126H**  
8" LED Architectural Housing

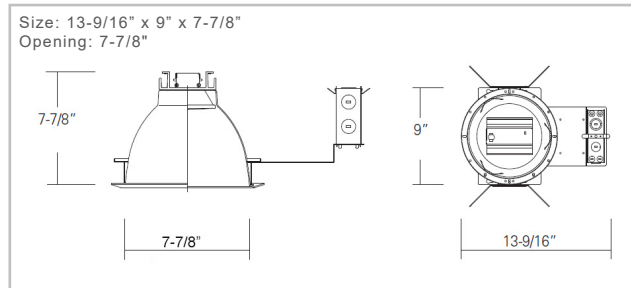

**8096B**

Optional Two Piece Bar Hanger set  
24" Joist Span



**ORDERING GUIDE**

Example: 8125H-23-40-EM

Model #	Wattage		CCT		Emergency
<b>8125H</b>	<b>-23</b>	23W	<b>-30</b>	3000K	blank no EM option
<b>8125HIC</b>	<b>-30</b>	30W	<b>-35</b>	3500K	<b>EM</b> adds Battery Pack
<b>8126H</b>	<b>-45</b>	45W	<b>-40</b>	4000K	
			<b>-50</b>	5000K	


## Trims For 8125H, 8125HIC and 8126H

Wattage, lumen output, and CCT determined by housing choice. Check housing Ordering Guide.

### 8671




Haze Cone Reflector  
O. D. 9-7/16"




#### ORDERING GUIDE Example: 8671HZ

Model #	Finish
<b>8671</b>	HZ Haze

### 8673

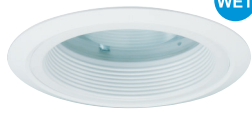

Haze Reflector  
with lens  
O. D. 9-7/16"



#### ORDERING GUIDE Example: 8673WH

Model #	Finish
<b>8673</b>	WH White

# Non-IC, Architectural LED Retrofit












- 120V-277V Universal Housing
- Dimmable TRIAC, 10-100% And 0-10V DC Dimming
- 50,000 Hours Projected Life
- 3000K | 3500K | 4000K | 5000K | 80 CRI
- 15W | 1015 lms 20W | 1245 lms
- 30W | 1915 lms 40W | 2565
- Beam Angle: 8041 | 65° 8061 & 8081 | 60°
- Energy Star Listed
- cCSAus Listed for damp location
- 5 Year Limited Warranty
- IC / Non-IC New Construction Mounting Plates Available



**8041**  
4" Aperture Non-IC, LED Retrofit

**8061**  
6" Aperture Non-IC, LED Retrofit

**8081**  
8" Aperture Non-IC, LED Retrofit

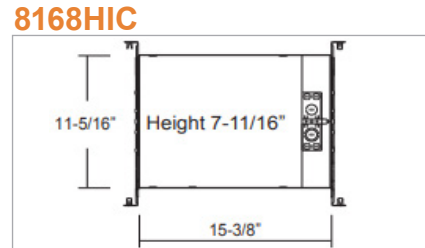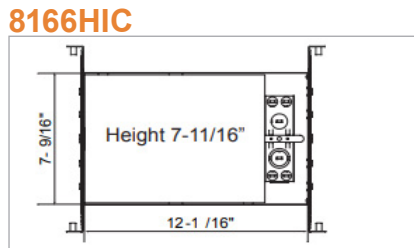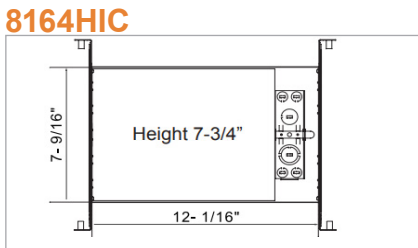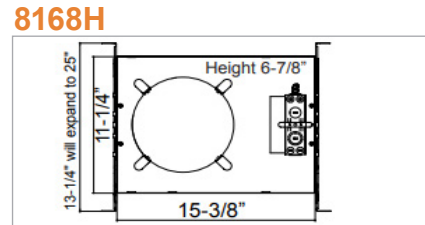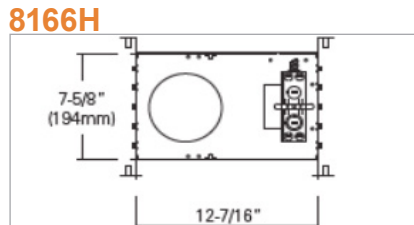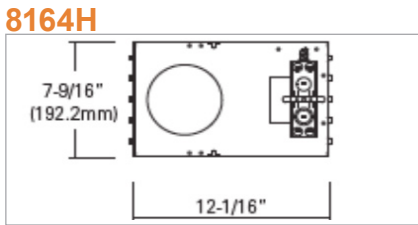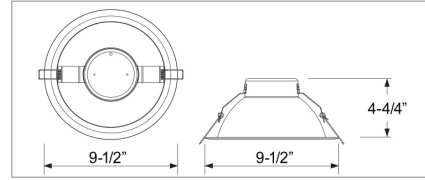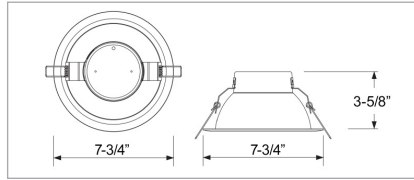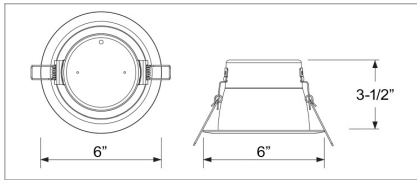

**ORDERING GUIDE**

Example: 8041-15-30-EM

Housing	Wattage	Source Lumens	Emergency
8041	-15 15W	-30 3000K	blank no EM option
8061	-20 20W	-35 3500K	EM adds Battery Pack
8081	-30 30W <sup>1</sup>	-40 4000K	
	-40 40W <sup>2</sup>		

*Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.*








# 3" LED IC Rated Housings




Housing	Trims (sold separately)	
<ul style="list-style-type: none"> <li>• 120V</li> <li>• IC Rated for direct contact</li> <li>• 1-1/4" ceiling thickness adjustable</li> </ul>	<ul style="list-style-type: none"> <li>• 3" Nominal Aperture</li> <li>• 50,000 Hour Project Life</li> <li>• 3000K   80 or 90 CRI</li> <li>• Dimmable TRIAC, 10-100%</li> </ul>	<ul style="list-style-type: none"> <li>• cCSAus Listed for damp location</li> <li>• Housing: 1 Year Limited Warranty</li> <li>• LED Lamps: 5 Year Limited Warranty</li> </ul>



**8317H**  
3" LED IC Rated Frame-In

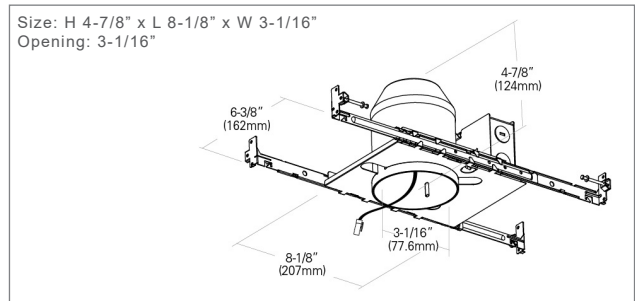

**8317HR**  
3" LED IC Rated Remodel

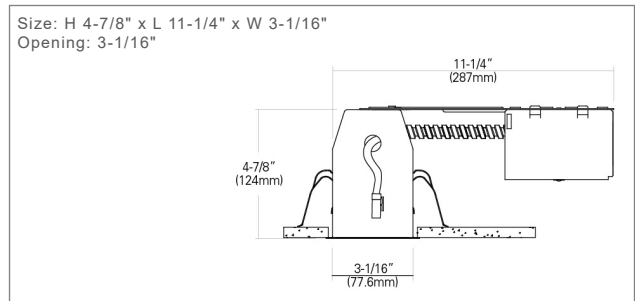

**ORDERING GUIDE**

Example: 8317H

- Model #  
**8317H**  
**8317HR**



## Trims For 8317H and 8317HR

**8821-1**



3" LED Recessed Baffle  
10W | 650 lms  
3000K | 80 CRI  
120V  
O.D. 3-3/4"

**ORDERING GUIDE**

Example: 8821-1-WH-3K

Model #	Finish	CCT
<b>8821-1-</b>	<b>WH</b> White	<b>-3K</b> 3000K

**8822-1**



3" LED Recessed Gimbal  
10W | 650 lms  
3000K | 80 CRI  
120V  
O.D. 3-3/4"

**ORDERING GUIDE**

Example: 8822-1-WH-3K

Model #	Finish	CCT
<b>8822-1-</b>	<b>WH</b> White	<b>-3K</b> 3000K

**8823**



3" Recessed Eyeball  
8W | 600 lms  
3000K | 90 CRI  
120V  
O.D. 3-5/8"

**ORDERING GUIDE**

Example: 8823WH

Model #	Finish
<b>8823</b>	<b>WH</b> White

**8824**



3" LED Retrofit Baffle  
10W | 600 lms  
3000K | 90 CRI  
120V  
O.D. 3-5/8"



**ORDERING GUIDE**

Example: 8824WH-90-3K

Model #	Finish	CRI	CCT
<b>8824</b>	<b>WH</b> White	<b>-90</b>	<b>-3K</b> 3000K

**8825**



3" LED Retrofit Gimbal  
10W | 600 lms  
3000K | 90 CRI  
120V  
O.D. 3-5/8"



**ORDERING GUIDE**

Example: 8825WH-90-3K

Model #	Finish	CRI	CCT
<b>8825</b>	<b>WH</b> White	<b>-90</b>	<b>-3K</b> 3000K

# 4" LED IC Airtight Housings



### Housing

- 120V
- IC Rated for direct contact
- 1" ceiling thickness adjustable


### Trims (sold separately)

- 4" Nominal Aperture
- 50,000 Hours Projected Life
- 3000K or 4000K | 80 or 90 CRI
- Dimmable TRIAC, 10-100%


- cCSAus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty



**8215HA**  
4" LED IC Airtight Frame-In

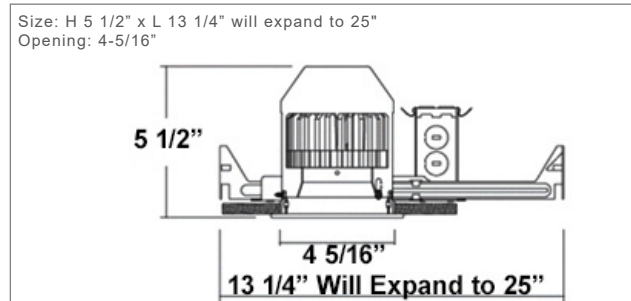

**8215HRA**  
4" LED IC Airtight Remodel

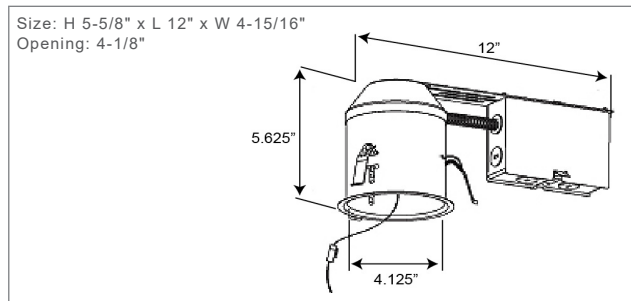

### ORDERING GUIDE

Example: 8215HA

Model #	EM Option
<b>8215HA</b>	
<b>8215HRA</b>	-EM adds EM Battery Backup (8215 housing only)

## Trims For 8215HA and 8215HRA

**8763**



4" LED Recessed Reflector  
10W | 600 lms  
3000K or 4000K | 90 CRI  
120V  
O.D. 5"

### ORDERING GUIDE

Example: 8763WH-90-3K

Model #	Finish	CRI	CCT
<b>8763</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b> 3000K
	<b>BK</b> Black		<b>-4K</b> 4000K
	<b>OB</b> Oil Rubbed Bronze		
	<b>CL</b> Clear		
	<b>WH</b> White		

**8769**



4" LED Recessed Baffle  
10W | 3000K  
80CRI: 889 lms  
90CRI: 710 lms  
120V  
O.D. 5"

### ORDERING GUIDE

Example: 8769WH-90-3K

Model #	Finish	CRI	CCT
<b>8769</b>	<b>BA</b> Brushed Aluminum	<b>-80</b>	<b>-3K</b> 3000K
	<b>BK</b> Black <sup>1</sup>		
	<b>OB</b> Oil Rubbed Bronze <sup>1</sup>		
	<b>WH</b> White		

1 - Only available in -80 CRI

**8770**



4" LED Recessed Clear Reflector  
10W | 710 lms  
3000K | 90 CRI  
120V  
O.D. 5"

### ORDERING GUIDE

Example: 8770CL-90-3K

Model #	Finish	CRI	CCT
<b>8770</b>	<b>CL</b> Clear	<b>-90</b>	<b>-3K</b> 3000K

**8771**



4" LED Recessed Gimbal  
10W | 717 lms  
3000K or 4000K | 90 CRI  
120V  
O.D. 5"

### ORDERING GUIDE

Example: 8771WH-90-3K

Model #	Finish	CRI	CCT
<b>8771</b>	<b>WH</b> White	<b>-90</b>	<b>-3K</b> 3000K
			<b>-4K</b> 4000K

**8773**



4" LED Recessed Square  
11W | 700 lms  
3000K or 4000K | 90 CRI  
120V  
O.D. 5-1/8"

### ORDERING GUIDE

Example: 8773WH-90-3K

Model #	Finish	CRI	CCT
<b>8773</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b> 3000K
	<b>OB</b> Oil Rubbed Bronze		
	<b>WH</b> White		

# 6" LED IC Airtight Housings



LED Lamps Housings

### Housing

- 120V
- IC Rated for direct contact
- 1-1/4" ceiling thickness adjustable

### Trims (sold separately)


- 6" Nominal Aperture
- 50,000 Hours Project Life
- 3000K or 4000K | 80 CRI or 90 CRI
- Dimmable TRIAC, 10-100%

- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty




## 8117HA

6" LED IC Airtight Shallow Frame-In

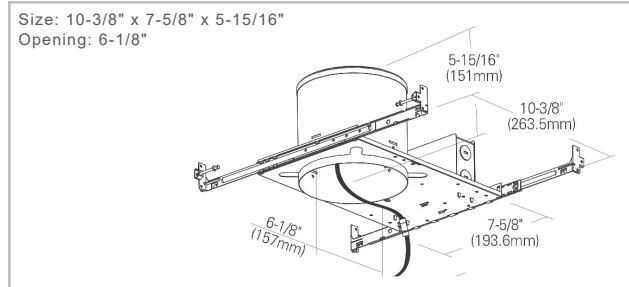

## 8117HRA

6" LED IC Airtight Shallow Remodel

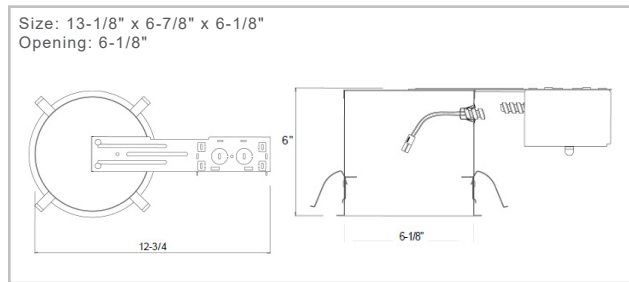

### ORDERING GUIDE

Example: 8117HA

Model #	EM Option
8117HA	-EM adds EM Battery Backup (8117HA housing only)
8117HRA	

## Trims For 8117HA and 8117HRA

8523



6" LED Recessed Baffle  
12.5W | 850 lms  
3000K or 4000K | 90 CRI  
120V  
O.D. 7-1/4"

8562



6" LED Gimbal  
13W | 900 lms  
3000K | 80 CRI  
120V  
O.D. 7-3/4"

8563



6" LED Reflector  
13W | 795 lms  
3000K or 4000K | 90 CRI  
120V  
O.D. 7-1/4"

8568



6" LED Recessed Baffle  
High Lumen Output  
17W | 1240 lms  
3000K or 4000K | 90 CRI  
120V  
O.D. 7-1/4"

### ORDERING GUIDE

Example: 8523WH-90-3K

Model #	Finish	CRI	CCT
8523	BN	Brushed Nickel	-90 -3K 3000K
	BK	Black	-4K 4000K
	OB	Oil Rubbed Bronze	
	WH	White	

### ORDERING GUIDE

Example: 8562WH-80-3K

Model #	Finish	CRI	CCT
8562	BN	Brushed Nickel	-80 -3K 3000K
	BK	Black	
	OB	Oil Rubbed Bronze	
	WH	White	

### ORDERING GUIDE

Example: 8563WH-90-3K

Model #	Finish	CRI	CCT
8563	BN	Brushed Nickel	-90 -3K 3000K
	BK	Black	-4K 4000K
	OB	Oil Rubbed Bronze	
	CL	Clear	
	WH	White	

### ORDERING GUIDE

Example: 8568WH-90-3K

Model #	Finish	CRI	CCT
8568	BK	Black	-90 -3K 3000K
	OB	Oil Rubbed Bronze	-4K 4000K
	CL	Clear	
	WH	White	

\* CL only available in -4K

# 4" Incandescent / LED Housings



Intertek LED Lamps Housings


### Housing

- 120V - 60Hz
- Airtight; Non-IC/IC Available
- Frame-in: up to 1" ceiling thickness adjustable


### Trims (sold separately)

- 4" Nominal Aperture
- Incandescent: 50W Max
- LED: Up to 900 lms
- LED: Dimmable TRIAC, 10-100%



- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

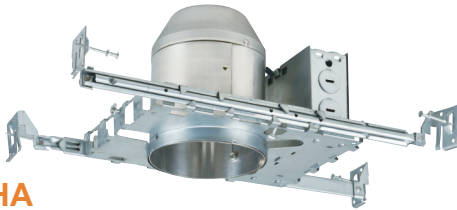


**8201HA**  
4" Airtight Frame-In

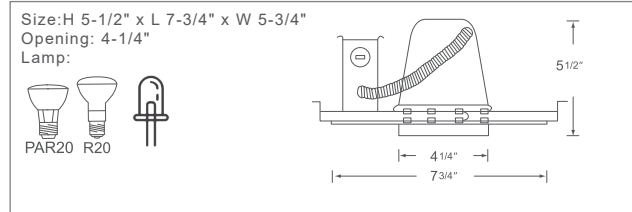

**8201HRA**  
4" Airtight Remodel

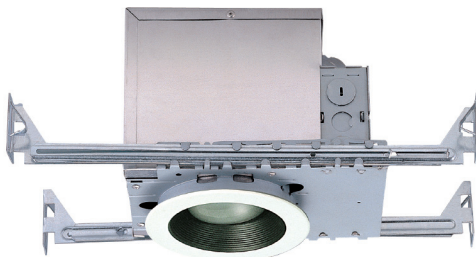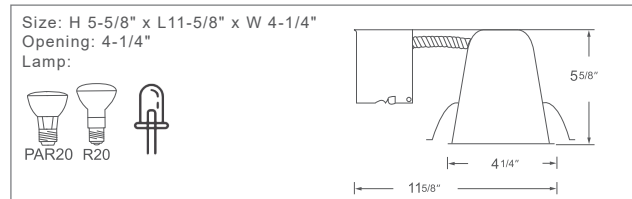

**8202HA**  
4" IC Airtight Frame-In

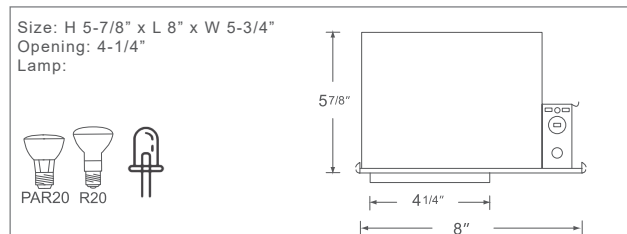

### ORDERING GUIDE

Example: 8201HA

Model #

- 8201HA
- 8201HRA
- 8202HA



## LED Trims For 8201HA, 8201HRA, and 8202HA

8756



**WET** LED Low-Profile Disk  
12W | 730 lms  
3000K | 90 CRI  
120V  
O.D. 5-7/8"

### ORDERING GUIDE

Example: 8756WH-90-3K-R

Model #	Finish	CRI	CCT	Retrofit
<b>8756</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b>	<b>-R</b>
	<b>BK</b> Black			
	<b>OB</b> Oil Rubbed Bronze			
	<b>WH</b> White			

8761



4" LED Retrofit Square  
9W | 700 lms  
3000K | 90 CRI  
120V  
O.D. 5"

### ORDERING GUIDE

Example: 8761BN-90-3K

Model #	Finish	CRI	CCT
<b>8761</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b> 3000K
	<b>OB</b> Oil Rubbed Bronze		

8763



**WET** 4" LED Recessed Reflector  
10W | 600 lms  
3000K or 4000K | 90 CRI  
120V  
O.D. 5"

### ORDERING GUIDE

Example: 8763BN-90-3K

Model #	Finish	CRI	CCT
<b>8763</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b> 3000K
	<b>BK</b> Black *		
	<b>OB</b> Oil Rubbed Bronze		
	<b>CL</b> Clear		
	<b>WH</b> White		

\* Only available in -4K

8765



4" LED Recessed Gimbal  
8W, 3000K  
90CRI: 600lms  
O.D. 5"

### ORDERING GUIDE

Example: 8765OB

Model #	Finish
<b>8765</b>	<b>BN</b> Brushed Nickel
	<b>OB</b> Oil Rubbed Bronze
	<b>WH</b> White

8768



4" LED Recessed Gimbal  
10W | 900 lms  
3000K | 90 CRI  
120V  
O.D. 5"

### ORDERING GUIDE

Example: 8768OB

Model #	Finish
<b>8768</b>	<b>BN</b> Brushed Nickel
	<b>OB</b> Oil Rubbed Bronze
	<b>WH</b> White

8722



**WET** 4" LED Recessed Baffle w/ Lens  
10W | 650 lms  
4000K | 90 CRI  
120V  
O.D. 5-1/8"

### ORDERING GUIDE

Example: 8722WH-90-4K

Model #	Finish	CRI	CCT
<b>8722</b>	<b>WH</b> White	<b>-90</b>	<b>-4K</b> 4000K

**LED Trims For 8201HA, 8201HRA, and 8202HA**

**8769**



4" LED Recessed Baffle  
10W, 3000K  
80 CRI: 889 lms  
90 CRI: 710 lms  
120V  
O.D. 5"

**ORDERING GUIDE**

Example: 8769WH-90-3K

Model #	Finish	CRI	CCT
<b>8769</b>	<b>BA</b> Brushed Aluminum	<b>-80</b>	<b>-3K</b> 3000K
	<b>BK</b> Black *	<b>-90</b>	
	<b>OB</b> Oil Rubed Bronze *		
	<b>WH</b> White		

\* Only available in 80 CRI

**8770**



4" LED Recessed Clear Reflector  
10W | 710 lms  
3000K | 90 CRI  
120V  
O.D. 5"

**ORDERING GUIDE**

Example: 8770CL-90-3K

Model #	Finish	CRI	CCT
<b>8770</b>	<b>CL</b> Clear	<b>-90</b>	<b>-3K</b> 3000K

**8771**



4" LED Recessed Gimbal  
10W | 717 lms  
3000K or 4000K | 90 CRI  
120V  
O.D. 5"

**ORDERING GUIDE**

Example: 8771WH-90-3K

Model #	Finish	CRI	CCT
<b>8771</b>	<b>WH</b> White	<b>-90</b>	<b>-3K</b> 3000K
			<b>-4K</b> 4000K

**8773**



4" LED Recessed Square  
11W | 700 lms  
3000K or 4000K | 90 CRI  
120V  
O.D. 5-1/8"


**ORDERING GUIDE**

Example: 8773WH-90-3K

Model #	Finish	CRI	CCT
<b>8773</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b> 3000K
	<b>OB</b> Oil Rubbed Bronze		<b>-4k</b> 4000K
	<b>WH</b> White		

**Incandescent Trims For 8201HA, 8201HRA, and 8202HA**

**8701**



White Baffle  
50W Max.  
PAR20/R20  
120V  
O.D. 5"

**ORDERING GUIDE**

Example: 8701WH

Model #	Finish
<b>8701</b>	<b>WH</b> White

**8702**



**WET** Fresnel Shower Trim  
Wet location listed  
35W Max.  
PAR20/R20  
120V  
O.D. 5"

**ORDERING GUIDE**

Example: 8702FS

Model #	Finish
<b>8702</b>	<b>FS</b> Fresnel Lens

**8705**



**WET** Albalite Shower Trim  
Wet location listed  
35W Max.  
PAR20/R20  
120V  
O.D. 5"

**ORDERING GUIDE**

Example: 8705AL

Model #	Finish
<b>8705</b>	<b>AL</b> Alabite

# 6" LED High Lumen Housing



LED Lamps Housings



## Housing

- 120-277V Universal - 60Hz
- IC Rated for direct contact
- Airtight Housing

## Trims (sold separately)

- 6" Nominal Aperture
- 15W: 950 lms
- 20W: 1500 lms
- Dimmable TRIAC, 10-100%

- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

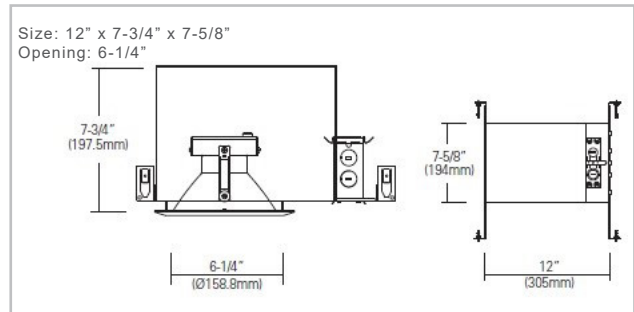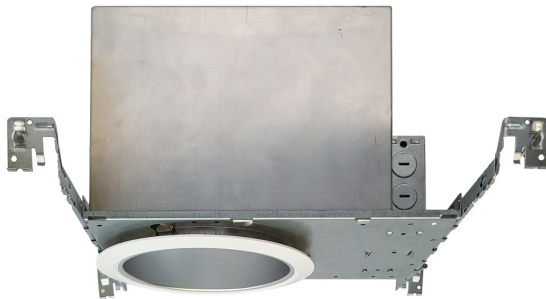

## 8116HIC

6" LED IC Airtight Frame-In

### ORDERING GUIDE

Example: 8116HIC-15-EM

Model #	Wattage	Emergency
<b>8116HIC</b>	-15 : 15W   950 lms -20 : 20W   1500 lms	blank no EM added -EM adds Emergency Battery

## LED Trims For 8116HIC

### 8570



6" LED Shower or Baffle Trim  
15W or 20W  
3000K or 4000K | 90 CRI  
120V  
O.D. 8"

### ORDERING GUIDE

Example: 8570WH-15-3K

Model #	Finish	Wattage	CCT
<b>8570</b>	FS Frosted Shower *	-15	-3K 3000K
	WH White Baffle	-20	-4K 4000K

\* FS Trim is Wet Location Listed

### 8571



6" LED Haze Open Reflector  
15W or 20W  
3000K or 4000K | 90 CRI  
120V  
O.D. 8"

### ORDERING GUIDE

Example: 8571HZ-15-3K

Model #	Finish	Wattage	CCT
<b>8571</b>	HZ Haze	-15	-3K 3000K
		-20	-4K 4000K

### 8572



6" LED Eyeball  
15W or 20W  
3000K | 90 CRI  
120V  
O.D. 7-3/4"

### ORDERING GUIDE

Example: 8572WH-15-3K

Model #	Finish	Wattage	CCT
<b>8572</b>	WH White	-15	-3K 3000K
		-20	

### 8573



6" LED Gimbal  
15W or 20W  
3000K | 90 CRI  
120V  
O.D. 7-3/4"

### ORDERING GUIDE

Example: 8573WH-15-3K

Model #	Finish	Wattage	CCT
<b>8573</b>	WH White	-15	-3K 3000K
		-20	

# 6" Incandescent / LED Housings



LED Lamps Housings

### Housing

- 120V - 60Hz
- IC Airtight
- Frame-in: up to 1-1/4" ceiling thickness adjustable


### Trims (sold separately)

- 6" Nominal Aperture
- Incandescent: 75W Max
- LED: Up to 1240 lms
- LED: Dimmable TRIAC, 10-100%


- cETLus Listed for damp location
- Housing: 1 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty




**8102HAQ**  
6" IC Airtight Frame-In

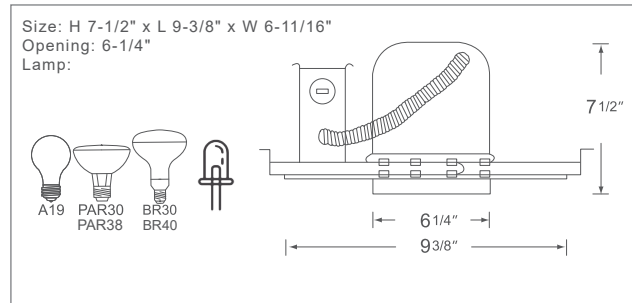

**8102HRA**  
6" IC Airtight Remodel

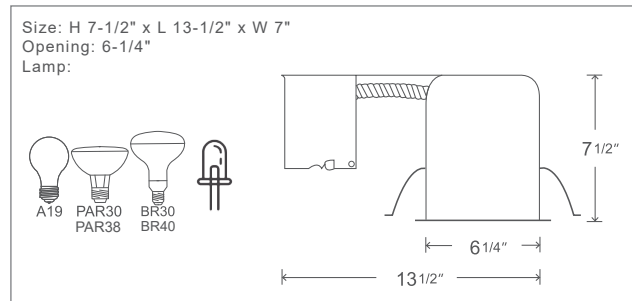

**8104HICA**  
6" IC Airtight Shallow Frame-In

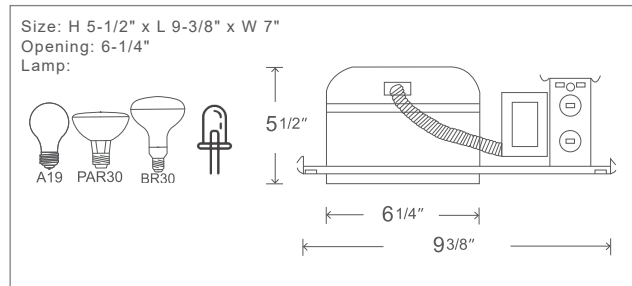

### ORDERING GUIDE

Example: 8102HAQ

Model #

- 8102HAQ
- 8102HRA
- 8104HICA

## LED Trims For 8102HAQ, 8102HRA, 8104HICA

**8523**



6" LED Recessed Baffle  
12.5W | 850 lms  
3000K or 4000K | 90 CRI  
120V | O.D. 7-1/4"

### ORDERING GUIDE

Example: 8523WH-90-3K

Model #	Finish	CRI	CCT
<b>8523</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b> 3000K
	<b>BK</b> Black		<b>-4K</b> 4000K
	<b>OB</b> Oil Rubbed Bronze		
	<b>WH</b> White		

**8562**



6" LED Gimbal  
13W | 900 lms  
3000K | 80 CRI  
120V | O.D. 7-3/4"

### ORDERING GUIDE

Example: 8562WH-80-3K

Model #	Finish	CRI	CCT
<b>8562</b>	<b>BN</b> Brushed Nickel	<b>-80</b>	<b>-3K</b> 3000K
	<b>BK</b> Black		
	<b>OB</b> Oil Rubbed Bronze		
	<b>WH</b> White		

**8563**



6" LED Reflector  
13W | 795 lms  
3000K or 4000K | 90 CRI  
120V | O.D. 7-1/4"

### ORDERING GUIDE

Example: 8563WH-90-3K

Model #	Finish	CRI	CCT
<b>8563</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b> 3000K
	<b>BK</b> Black		<b>-4K</b> 4000K
	<b>OB</b> Oil Rubbed Bronze		
	<b>CL</b> Clear		
	<b>WH</b> White		

**8568**



6" LED Recessed Baffle  
High Lumen Output  
17W | 1240 lms  
3000K or 4000K | 90 CRI  
120V | O.D. 7-1/4"

### ORDERING GUIDE

Example: 8568WH-90-3K

Model #	Finish	CRI	CCT
<b>8568</b>	<b>BK</b> Black	<b>-90</b>	<b>-3K</b> 3000K
	<b>OB</b> Oil Rubbed Bronze		<b>-4K</b> 4000K
	<b>CL</b> Clear *		
	<b>WH</b> White		

\* CL only available in -4K

**8564**



6" LED Retrofit Eyeball  
12W | 900 lms  
3000K | 90 CRI  
120V | O.D. 7-1/4"

### ORDERING GUIDE

Example: 8564WH-90-3K

Model #	Finish	CRI	CCT
<b>8564</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b> 3000K
	<b>WH</b> White		

**8567**



6" LED Eyeball  
15W | 1200 lms  
3000K | 90 CRI  
120V | O.D. 7-1/4"

### ORDERING GUIDE

Example: 8567WH-90-3K

Model #	Finish	CRI	CCT
<b>8567</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b> 3000K
	<b>WH</b> White		

**8538**



6" LED Flat Lens Disk  
15W | 850 lms  
3000K or 4000K | 90 CRI  
120V | O. D. 7-3/8"

### ORDERING GUIDE

Example: 8538WH-90-3K-R

Model #	Finish	CRI	CCT	Retrofit
<b>8538</b>	<b>BN</b> Brushed Nickel	<b>-90</b>	<b>-3K</b>	<b>-R</b>
	<b>BK</b> Black		<b>-4K</b>	
	<b>OB</b> Oil Rubbed Bronze			
	<b>WH</b> White			

**LED Trims For 8102HAQ, 8102HRA, 8104HICA**

**8556**



6" LED Low-Profile Disk  
15W | 1000 lms  
3000K or 4000K | 90 CRI  
120V | O.D. 7-3/8"

**ORDERING GUIDE**

Example: 8556WH-90-3K-R

Model #	Finish	CRI	CCT	Retrofit
<b>8556</b>	<b>BN</b> Brushed Nickel *	<b>-90</b>	<b>-3K</b>	<b>-R</b>
	<b>WH</b> White			

**8569**



6" High Lumen Flat Lens Disk  
15W | 1240 lms  
120V | O.D. 7-3/8"

**ORDERING GUIDE**

Example: 8769WH-80-3K-R

Model #	Finish	CRI	CCT	Retrofit
<b>8769</b>	<b>WH</b> White	<b>-80</b>	<b>-3K</b>	<b>-R</b>

**Incandescent Trims For 8102HAQ, 8104HICA**

**8502**



6" Lexan Shower Trim w/  
Fresnel Lens  
White Metal Trim  
Wet location listed  
60W Max. A19

**ORDERING GUIDE**

Example: 8502FS

Model #	Finish
<b>8502</b>	<b>FS</b> Fresnel Lens

**8504**



6" Black Baffle  
75W Max.  
PAR30/BR30  
O. D. 8"

**ORDERING GUIDE**

Example: 8504BK

Model #	Finish
<b>8504</b>	<b>BK</b> Black

**8505**



6" Lexan Shower Trim w/ Flat Opal  
Albalite Lens  
White Trim Ring  
Wet location listed  
60W Max. A19

**ORDERING GUIDE**

Example: 8505AL

Model #	Finish
<b>8505</b>	<b>AL</b> Albalite Lens
	<b>AL-BR</b> Albalite Lens w/ Bracket
	<b>AL-M</b> Albalite Lens w/ Metal Ring

**8511**



6" White Baffle  
75W Max.  
PAR30/BR30  
O. D. 8"

**ORDERING GUIDE**

Example: 8511WH

Model #	Finish
<b>8511</b>	<b>WH</b> White

**8519**



6" Airtight White Baffle Cone  
150W Max.  
PAR30/BR30/A19  
PAR38/BR40  
O. D. 8"

**ORDERING GUIDE**

Example: 8519WH

Model #	Finish
<b>8519</b>	<b>WH</b> White

**8544**



6" Open Trim  
75W Max.  
PAR30/BR30  
O. D. 8"

**ORDERING GUIDE**

Example: 8544WH



Model #	Finish
<b>8544</b>	<b>WH</b> White



# 4" LED Retrofit Kit



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 11W | 650 lms
- Aluminum Construction with Frosted Lens
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 compliant
- LED Lamps: 5 Year Limited Warranty

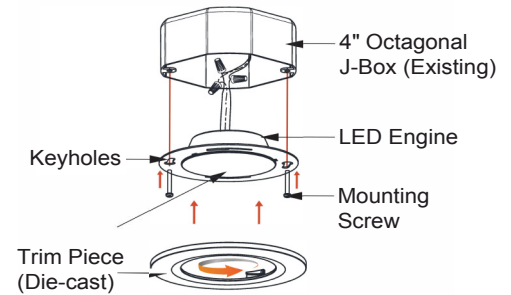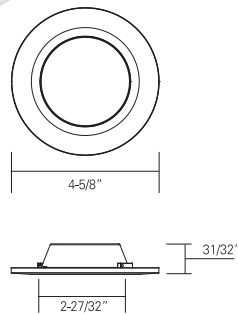

## ORDERING GUIDE Example: 8708WH-3K


Model	Finish	CCT
<b>8708</b>	<b>WH</b> White	<b>-3K</b> 3000
		<b>-4K</b> 4000

Accessory	Finish
<b>4-JBR-BK</b>	Black Trim Ring for 8708
<b>4-JBR-BN</b>	Brushed Nickel Trim Ring for 8708

# 4" LED Retrofit Trim, 2.25" Aperture



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 11W | 650 lms
- Aluminum Construction with Frosted Lens
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty

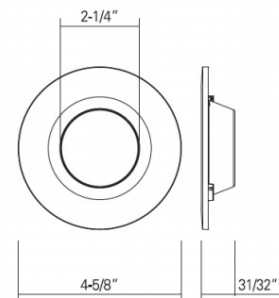

## ORDERING GUIDE Example: 8711WH-90-3K


Model	Finish	CRI	CCT
<b>8711</b>	<b>WH</b> White	<b>-90</b>	<b>-3K</b> 3000
			<b>-4K</b> 4000

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.


# 4" and 6" LED Ultra-Thin Light



- 120V - Ultra Slim Profile
- Durable Aluminum Construction
- Frosted Acrylic Lens
- 120° Beam Angle
- 4"-8742-2: 670 lms
- 6"-8542-2: 884 lms
- Dimmable TRIAC, 10-100%
- cETLus Listed for wet location
- Energy Star Listed
- LED lamps: 5 Year Limited Warranty

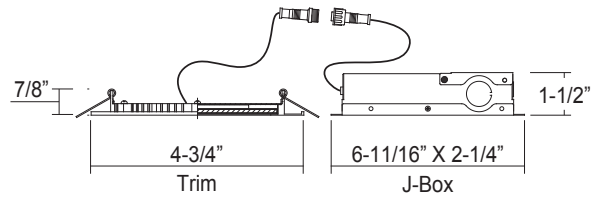

**8742-2**  
4" Ultra-Thin Light

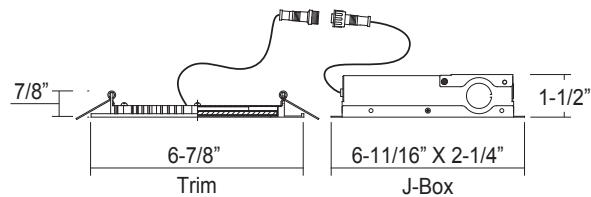

**8542-2**  
6" Ultra-Thin Light

## PF-4 and PF-6

### 4" or 6" Mounting Plate Accessory

- New Construction Mounting Plate
- Durable aluminum construction
- Includes four 24" bar hanger



### ORDERING GUIDE

Example: 8742-2WH-3K


Model	Finish	CCT
8742-2 4" Ultra-Thin Light	WH White	-3K 3000K
8542-2 6" Ultra-Thin Light		-4K 4000K
Accessory		
PF-4	4" Mounting Plate	
PF-6	6" Mounting Plate	

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.


# 6" and 8" LED Ultra-Thin Light



- 120V - Ultra Slim Profile
- Durable Aluminum Construction
- Frosted Acrylic Lens
- 120° Beam Angle
- 3"-8842: 350 lms
- 8"-8642: 1150 lms
- Dimmable TRIAC, 10-100%
- cETLus Listed for wet location
- Energy Star Listed
- 5 Year Limited Warranty
- LED Lamps: 5 Year Limited Warranty

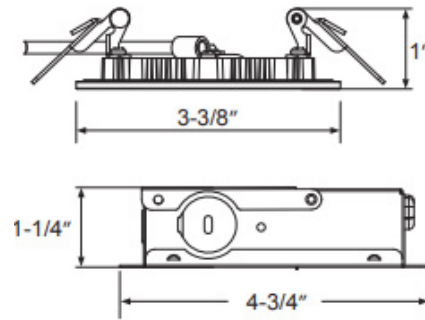

**8842**  
3" Ultra-Thin Light

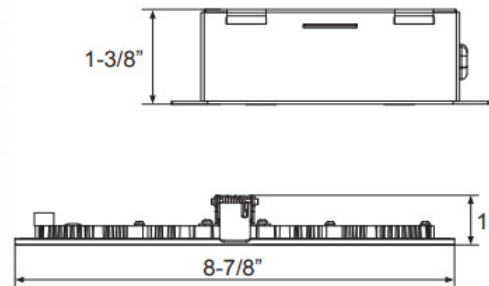


**8642**  
8" Ultra-Thin Light

## PF-3 and PF-4

### 3" or 4" Mounting Plate Accessory

- New Construction Mounting Plate
- Durable aluminum construction
- Includes four 24" bar hanger



### ORDERING GUIDE


Model	Finish	CCT	Example: 8842WH-3K
<b>8842</b> 3" Ultra-Thin Light	<b>WH</b> White	<b>-3K</b> 3000K	
<b>8642</b> 8" Ultra-Thin Light		<b>-4K</b> 4000K	
<b>Accessory</b>			
<b>PF-3</b>			3" Mounting Plate

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# 4" IC Rated, LED Retrofit & New Construction J-Box Downlight



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 12.7W | 760 lms
- Aluminum Construction with Frosted Lens
- IC Rated
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamps: 5 Year Limited Warranty

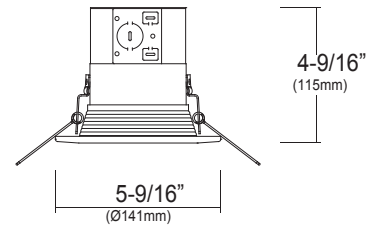


Ceiling Cut-out: 4-3/8"

### ORDERING GUIDE

Example: 8775WH-90-3K


Model	Finish	CRI	CCT
<b>8775</b>	<b>WH</b> White	<b>-90</b> 90 CRI	<b>-3K</b> 3000 <b>-4K</b> 4000
<b>Accessory</b>			
	<b>PF-4</b>	4" Mounting Plate	



# 6" IC Rated, LED Retrofit & New Construction J-Box Downlight



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 21W | 1314 lms
- Aluminum Construction with Frosted Lens
- IC Rated
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamps: 5 Year Limited Warranty

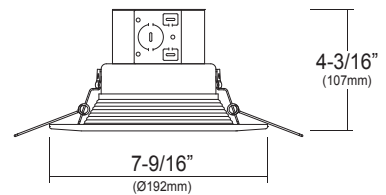

Ceiling Cut-out: 5-7/8"

### ORDERING GUIDE

Example: 8545WH-90-3K

Model	Finish	CRI	CCT
<b>8545</b>	<b>WH</b> White	<b>-90</b> 90 CRI	<b>-3K</b> 3000 <b>-4K</b> 4000
<b>Accessory</b>			
	<b>PF-6</b>	6" Mounting Plate	




Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# 4" IC Rated, LED Recessed Adjustable Gimbal J-Box Downlight



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- 360° Rotational Axis Point
- 11.5W | 730 lms
- Aluminum Construction
- IC Rated
- cCSAus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamps: 5 Year Limited Warranty

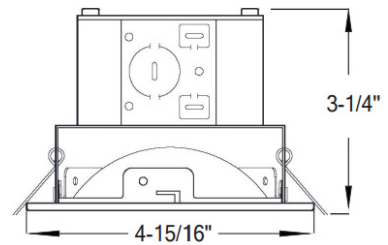

**ORDERING GUIDE**

Example: 8776WH-90-3K

Model	Finish	CRI	CCT
8776	WH White	-90 90 CRI	-3K 3000K

Accessory
PF-4 4" Mounting Plate






# 5" / 7" Slim Round Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 8739: 5-5/8" x 1" | 12W | 722 lms
- 8536: 7" x 1" | 14W | 920 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty

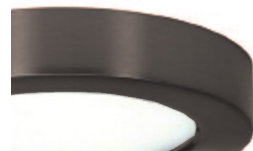

Oil Rubbed Bronze (OB)



White (WH)



Black (BK)

### ORDERING GUIDE


Example: 8536WH-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8739	BK Black	-90	-3K 3000	blank no retrofit option
8536	BN Brushed Nickel		-4K 4000	-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

# 7" Slim Round Disk



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7" x 1" | 14W | 1050 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty

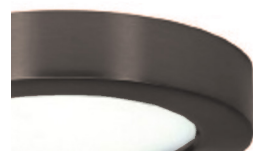

Oil Rubbed Bronze (OB)



White (WH)



Black (BK)

### ORDERING GUIDE

Example: 8539BK-80-3K-R


Model	Finish	CRI	CCT	Retrofit
8539	BK Black	-80	-3K 3000	blank no retrofit option
	BN Brushed Nickel			-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# 5" / 7" Square Ceiling Mount



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with plastic lens
- 8548: 7-1/4" x 1-1/4" | 15W | 907 lms
- 8748: 4-15/16" x 9/16" | 10W | 625 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty

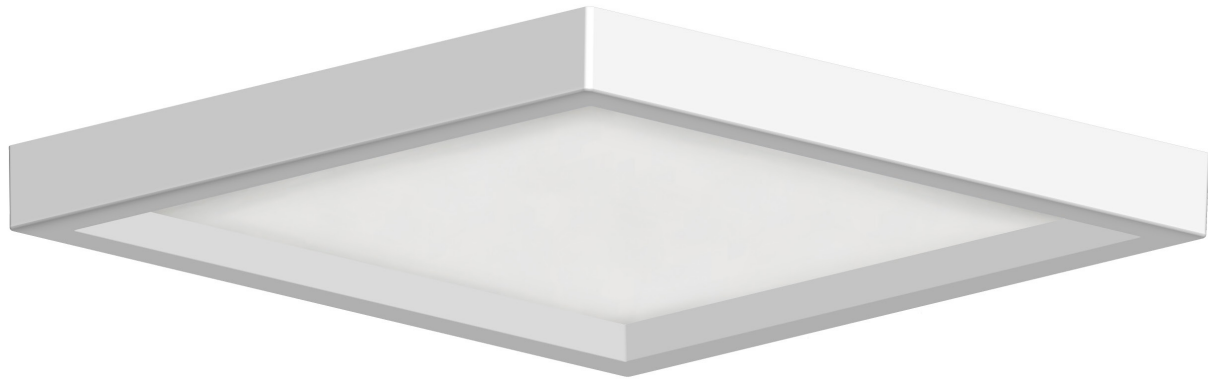

White (WH)



Black (BK)



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)

## ORDERING GUIDE

Example: 8538BK-90-3K-R

Model	Finish		CRI	CCT
8748	BK	Black *	-90	-3K 3000
8548	BN	Brushed Nickel		-4K 4000
	OB	Oil Rubbed Bronze		
	WH	White		

\* - Only available for 8548

# 4" Low-Profile Disk



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum housing with polycarbonate lens
- 5-7/8" x 1-1/16" | 12W | 730 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty



Brushed Nickel (BN)

Black (BK)



White (WH)



Oil Rubbed Bronze (OB)

### ORDERING GUIDE

Example: 8756BN-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8756	BN Brushed Nickel	-90	-3K 3000	blank no retrofit option
	BK Black			-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

# 6" Low-Profile Disk



- 120V - 60Hz
- 27000K, 3000K, 4000K, 5000K
- 90 CRI
- Dimmable TRIAC, 0-100%
- Steel housing with polycarbonate lens
- 7-3/8" x 1-1/4" | 15W | 899 lms
- Energy Star Listed
- cCSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)



Black (BK)



Brushed Nickel (BN)

### ORDERING GUIDE

Example: 8556BN-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8556	BN Brushed Nickel *	-90	-27K 27000	blank no retrofit option
	BK Black		-3K 3000	-R adds retrofit
	WH White		-4K 4000	
			-5K 5000	

\* Available in -3K or -4K only

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# 6" Low-Profile Closet Light



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8" x 1-3/8" | 15W | 900 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



**ORDERING GUIDE** Example: 8556WH-S-90-3K

Model	Finish	Sensor	CRI	CCT
8556	WH White	-S Sensor	-90 90 CRI	-3K 3000K

# 6" LED, CCT Selectable, Low-Profile Disk



- 120V - 60Hz
- Color Selectable | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8" x 1-1/4"
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



**Adjusted Color of Light with Intrgrated Switch**

- SOFT WHITE (3000K)
- BRIGHT WHITE (4000K)
- DAYLIGHT (5000K)

**ORDERING GUIDE** Example: 8557WH-90-345

Model	Finish	CRI	CCT	Retrofit
8557	WH White	-80 80 CRI	-345 CCT Selectable for 3000K, 4000K, 5000K	blank no retrofit option -R adds retrofit

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# 7" Flat Lens Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8" x 1" | 15W | 835 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)



Oil Rubbed Bronze (OB)



Brushed Nickel (BN)



Black (BK)

### ORDERING GUIDE

Example: 8538BK-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8538	BK Black	-90	-3K 3000	blank no retrofit option
	BN Brushed Nickel		-4K 4000	-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

# 7" High Lumen Flat Lens Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8" x 1" | 15W | 1240 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty



White (WH)

### ORDERING GUIDE

Example: 8569WH-80-3K-R



Model	Finish	CRI	CCT	Retrofit
8569	WH White	-80	-4K 4000	blank no retrofit option
				-R adds retrofit

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# 9" LED Low-Profile Disk Light



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 9-1/2" x 1-1/4" | 30W | 2085 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty

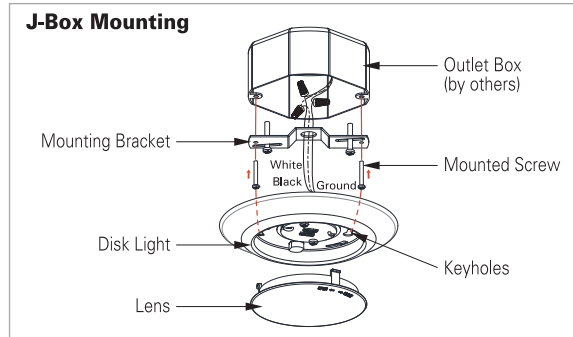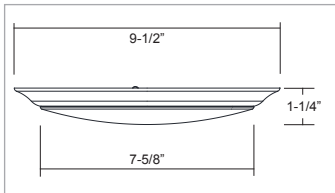

**ORDERING GUIDE** Example: 8554WH-90-3K

Model	Finish	CRI	CCT
8554	WH White	-90 90 CRI	-3K 3000 -4K 4000


Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



## Recessed Lighting Accessories

### 8096A

Nail-Less Bar Hanger

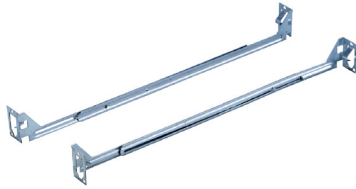

### 8096B

Two Piece Bar Hanger set  
24" Joist Span



### 8091A

Multi-Channel Bracket



### Mounting Plate

PF-3 - 3" Mounting Plate

PF-4 - 4" Mounting Plate

PF-6 - 6" Mounting Plate



### 8097A

V-Spring



### 8098A

Coil Spring



### FF109-300

One hour fire rated light  
cover, regular



### FF109-350

One hour fire rated light  
cover, large



### FF109X

Two hour fire rated light  
cover, regular



# Wall / Ceiling Mount



## Wall Mount / Ceiling Mount Lighting Overview



**4319**  
Edge-Lit LED Ribbon  
Ceiling Mount  
Page 107



**4506**  
Edge-Lit LED Ribbon  
Wall Mount  
Page 107



**4905**  
Edge-Lit LED Ribbon  
Wall Mount  
Page 107



**8739, 8536, 8539**  
5", 7" Slim Round Disk  
Ceiling Mount  
Page 108



**4350**  
11", 13", 15" LED  
Ceiling Mount  
Page 109



**4325D-1-30**  
12" LED Ceiling Mount or  
Wall Mount  
Page 109



**4326D-1-30**  
14" LED Ceiling Mount or  
Wall Mount  
Page 109



**4327D-1-30**  
16" LED Ceiling Mount or  
Wall Mount  
Page 109



**8748, 8548**  
4", 6" Low-Profile Square  
Ceiling Mount  
Page 110



**4328-1, 4329-1, 4330-1**  
11", 13", 15" LED Square  
Ceiling Mount  
Page 111



**4313-1, 4314-1, 4318-1**  
Flush Round  
Ceiling Mount  
Page 112



**4345-30**  
Flush Round  
Ceiling Mount  
Page 112



**4340**  
Flush Round LED  
Ceiling Mount  
Page 113



**4715**  
11" Wet Location  
Ceiling Mount  
Page 114



**4347**  
11", 13", 15" Dome  
Ceiling Mount  
Page 114

## Wall Mount / Ceiling Mount Lighting Overview



**4348**  
11", 13" Ceiling Mount  
Page 115



**4333, 4334, 4335**  
11", 13", 15" Dome  
Ceiling Mount  
Page 115



**8756, 8556**  
4", 6" Low-Profile Disk Light  
Page 116



**8556-S**  
6" LED Low-Profile Closet Light  
Page 117



**8557**  
6" LED Low-Profile Disc Light,  
CCT Selectable  
Page 117



**8538, 8569**  
7" Flat Lens Disk  
Page 118



**8554**  
9" LED High Lumen Disk  
Page 119



**4336, 4337, 4338**  
12", 14", 16" Dome  
Ceiling Mount  
Page 120



**4320, 4322**  
11", 14" Square Dome  
Ceiling Mount  
Page 120



**4503-30**  
8" LED Wall Sconce  
Page 121



**4505-30**  
12" Half-Circle Wall Sconce  
Page 121



**4404-30**  
LED Indoor Wall Sconce  
Page 122

### Warranty Information



Integrated LED Lights



Other Components



# Edge-Lit LED Ribbon

- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Metal construction with acrylic diffuser
- 4319: 15-3/4" x 4-1/8" | 25W | 1450 lms
- 4506: 10" x 4-1/8" x 3-1/4" | 9W | 500 lms
- 4905: 24" x 4-1/8" x 3-5/8" | 22W | 1500 lms
- cETLus Listed for damp location
- 5 Year Limited Warranty



**4319**



**4506**



**4905**

WALL MOUNT / CEILING MOUNT

**ORDERING GUIDE** Example: 4319BN

Model	Finish			
<b>4319</b>	<b>BN</b>	Brushed Nickel		
<b>4506</b>				Example: 4905BN-24
Model	Finish		Length	
<b>4905</b>	<b>BN</b>	Brushed Nickel	<b>-24</b>	24"


Specifications and dimensions subject to change.  
 Lumens are delivered unless otherwise noted.  
 See website for most current information.



## 5" / 7" Slim Round Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 8739: 5-3/4" x 1" | 12W | 722 lms
- 8536: 7" x 1" | 14W | 920 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty

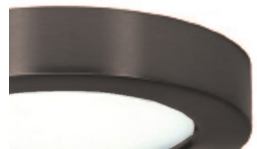

Oil Rubbed Bronze (OB)



Brushed Nickel (BN)



White (WH)



Black (BK)

### ORDERING GUIDE

Example: 8739WH-90-3K


Model	Finish	CRI	CCT	Retrofit
<b>8739</b>	<b>BK</b> Black	<b>-90</b>	<b>-3K</b> 3000	blank no retrofit option
<b>8536</b>	<b>BN</b> Brushed Nickel			<b>-R</b> adds retrofit
	<b>OB</b> Oil Rubbed Bronze			
	<b>WH</b> White			

\* 8536BK-4K not available

## 7" Slim Round Disk



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7" x 1" | 14W | 1050 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty



Oil Rubbed Bronze (OB)



Brushed Nickel (BN)



White (WH)



Black (BK)

### ORDERING GUIDE

Example: 8539BK-80-3K

Model	Finish	CRI	CCT	Retrofit
<b>8539</b>	<b>BK</b> Black	<b>-80</b>	<b>-3K</b> 3000	blank no retrofit option
	<b>BN</b> Brushed Nickel			<b>-R</b> adds retrofit
	<b>OB</b> Oil Rubbed Bronze			
	<b>WH</b> White			

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.



# 11" / 13" / 15" Flat Lens Thin Profile



- 120V - 60Hz
- 3000K or 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 11" W x 1" D | 15W | 1000 lms
- 13" W x 1" D | 20W | 1450 lms
- 15" W X 1" D | 30W | 1900 lms
- Energy Star Listed
- JA8/Title 24 Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



White (WH)



Oil Rubbed Bronze (OB)

## ORDERING GUIDE

Example: 4350WH-3K-15

Model	Finish	CCT	Size
4350	BN Brushed Nickel	-3K 3000K	-11 11"
	OB Oil Rubbed Bronze	-4K 4000K	-13 13"
	WH White		-15 15"

# 12" / 14" / 16" Round Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Steel construction with polycarbonate diffuser
- 4325D-1: 12-13/16" x 3-7/16" | 15W | 1138 lms
- 4326D-1: 13-13/16" x 3-13/16" | 23W | 1590 lms
- 4327D-1: 15-13/16" x 4" | 34W | 1900 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty



Brushed Nickel (BN)



White (WH)



Oil Rubbed Bronze (OB)

## ORDERING GUIDE


Example: 4325D-1-30-OB-EM

Model	Finish	EM Option
4325D-1-30	-BN Brushed Nickel	blank no EM option
4326D-1-30	-OB Oil Rubbed Bronze	-EM adds EM option
4327D-1-30	-WH White	

# 5" / 7" Square Ceiling Mount



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 8548: 7-5/16" x 9/16" | 15W | 907 lms
- 8748: 4-15/16" x 9/16" | 10W | 625 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty

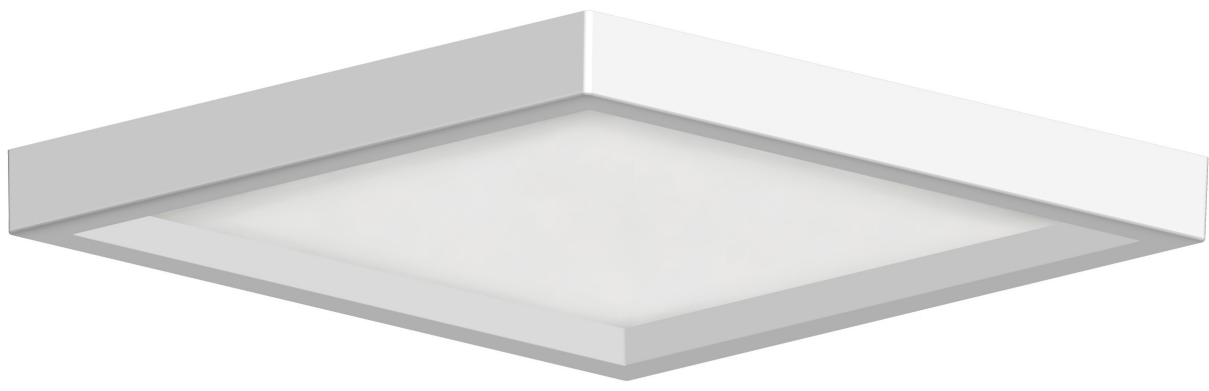

White (WH)



Black (BK)



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)

**ORDERING GUIDE** Example: 8548WH-90-3K

Model	Finish	CRI	CCT
8748	BK Black *	-90	-3K 3000
8548	BN Brushed Nickel		-4K 4000
	OB Oil Rubbed Bronze		
	WH White		

\* - Only available for 8548

# 11" / 13" / 15" Square Ceiling Mount




- 120V - 60Hz
- 3000K or 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4328-1: 11" square | 15W | 1000 lms
- 4329-1: 13" square | 20W | 1200 lms
- 4330-1: 15" square | 30W | 1800 lms
- Low-profile 1-1/4" height
- Energy Star Listed
- JA8/Title 24 Compliant
- ETL Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)



White (WH)

WALL MOUNT / CEILING MOUNT

## ORDERING GUIDE

Example: 4328-1BN-3K

Model	Finish		CCT	
<b>4328-1</b>	<b>BN</b>	Brushed Nickel	<b>-3K</b>	3000K
<b>4329-1</b>	<b>OB</b>	Oil Rubbed Bronze	<b>-4K</b>	4000K
<b>4330-1</b>	<b>WH</b>	White		

# Flush Round Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4313-1: 11-13/16" x 3-7/16" | 15W | 1049 lms
- 4314-1: 14-5/8" x 4-13/16" | 23W | 1512 lms
- 4318-1: 17-11/16" x 4-3/16" | 34W | 1908 lms
- Energy Star Listed
- CSA Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)



White (WH)

### ORDERING GUIDE

Example: 4314-1-30-OB-EM

Model	Finish		EM Option	
4313-1-30	-BN	Brushed Nickel	Blank	no EM option
4314-1-30	-OB	Oil Rubbed Bronze	-EM	add EM option
4318-1-30	-WH	White		

# Flush Round Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 32" x 18" x 4" | 35W | 2600 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)

### ORDERING GUIDE

Example: 4345-30-OB

Model	Finish	
4345-30	-BN	Brushed Nickel
	-OB	Oil Rubbed Bronze


# Flush Round Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRAIC, 10-100%
- Steel construction with acrylic diffuser
- 4340-30: 16-3/4"D x 4" H | 23W | 1600 lms
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)

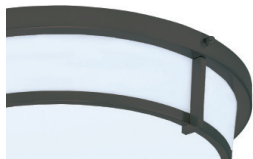

Oil Rubbed Bronze (OB)

WALL MOUNT / CEILING MOUNT

## ORDERING GUIDE

Example: 4340BN

Model	Finish	
<b>4340</b>	<b>BN</b>	Brushed Nickel
	<b>OB</b>	Oil Rubbed Bronze


# 11" Wet Location Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Polycarbonate housing and lens
- 11" x 3-1/2" | 17W | 800 lms
- cETLus Listed for wet location
- 5 Year Limited Warranty



Brushed Aluminum (BA)



Oil Rubbed Bronze (OB)



Black (BK)

### ORDERING GUIDE

Example: 4715BA

Model	Finish	
<b>4715</b>	<b>BA</b>	Brushed Aluminum
	<b>BK</b>	Black
	<b>OB</b>	Oil Rubbed Bronze

# 11" / 13" / 15" Dome Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with Alabaster Glass
- 11": 11-1/4" x 4-1/2" | 15W | 1100 lms
- 13": 13" x 5-1/4" | 20W | 1500 lms
- 15": 15" x 5-3/8" | 25W | 1800 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



White (WH)



Oil Rubbed Bronze (OB)

### ORDERING GUIDE

Example: 4347BN-11-3K

Model	Finish		Size	CCT
<b>4347</b>	<b>BN</b>	Brushed Nickel	<b>-11</b> 11"	<b>-3K</b> 3000K
	<b>OB</b>	Oil Rubbed Bronze	<b>-13</b> 13"	
	<b>WH</b>	White	<b>-15</b> 15"	



# 11" / 13" Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with frosted glass
- 11": 11-1/2" x 3-3/8" | 15W | 950 lms
- 13": 13-3/8" x 4" | 25W | 1400 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)

### ORDERING GUIDE

Example: 4348OB-13-3K

Model	Finish	Size	CCT
<b>4348</b>	<b>BN</b> Brushed Nickel	-11 11"	-3K 3000K
	<b>OB</b> Oil Rubbed Bronze	-13 13"	
	<b>WH</b> White		

# 11" / 13" / 15" Dome Ceiling Mount



- 120V - 60Hz
- 3000K | 93+ CRI
- Dimmable TRIAC, 10-100%
- Steel construction with frosted glass
- 4333: 11-5/16" x 5-11/16" | 15W | 940 lms
- 4334: 13-3/8" x 5-1/2" | 23W | 1368 lms
- 4335: 15" x 5-9/16" | 34W | 2050 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty



Oil Rubbed Bronze (OB)



White (WH)



Black (BK)



Brushed Nickel (BN)

### ORDERING GUIDE

Example: 4333BN

Model	Finish	
<b>4333</b>	<b>BN</b> Brushed Nickel	
<b>4334</b>	<b>OB</b> Oil Rubbed Bronze	
<b>4335</b>	<b>WH</b> White	

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# 4" Low-Profile Disk



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum housing with polycarbonate lens
- 5-7/8" x 1-1/8" | 12W | 710 lms
- Energy Star Listed
- cCSAus Listed for wet location
- 5 Year Limited Warranty



White (WH)



Brushed Nickel (BN)



Black (BK)



Oil Rubbed Bronze (OB)

### ORDERING GUIDE

Example: 8756BN-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8756	BN Brushed Nickel	-90	-3K 3000	blank no retrofit option
	BK Black			-R adds retrofit
	OB Oil Rubbed Bronze			
	WH White			

# 6" Low-Profile Disk



- 120V - 60Hz
- 27000K, 3000K, 4000K, 5000K
- 90 CRI
- Dimmable TRIAC, 0-100%
- Steel housing with polycarbonate lens
- 7-3/8" x 1-1/4" | 15W | 899 lms
- Energy Star Listed
- cCSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)



Brushed Nickel (BN)



Black (BK)

### ORDERING GUIDE

Example: 8556BN-90-3K-R

Model	Finish	CRI	CCT	Retrofit
8556	BN Brushed Nickel *	-90	-27K 2700	blank no retrofit option
	BK Black *		-3K 3000	-R adds retrofit
	WH White		-4K 4000	
			-5K 5000	

\* Available in -3K or -4K only

# 6" Low-Profile Closet Light



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8" x 1-3/8" | 15W | 900 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)

### ORDERING GUIDE

Example: 8556WH-S-90-3K

Model	Finish	Sensor	CRI	CCT
<b>8556</b>	WH White	-S Sensor	-90 90 CRI	-3K 3000K

# 6" LED, CCT Selectable, Low-Profile Disk



- 120V - 60Hz
- Color Selectable | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 7-3/8" x 1-3/8" | 15W | 900 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)

Adjusted Color of Light with Intrgrated Switch

- SOFT WHITE (3000K)
- BRIGHT WHITE (4000K)
- DAYLIGHT (5000K)

### ORDERING GUIDE

Example: 8557WH-90-345

Model	Finish	CRI	CCT	Retrofit
<b>8557</b>	WH White	-90 90 CRI	-345 CCT Selectable for 3000K, 4000K, 5000K	blank no retrofit option -R adds retrofit

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# 7" Flat Lens Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8" x 1" | 15W | 993 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



Oil Rubbed Bronze (OB)



White (WH)



Brushed Nickel (BN)



Black (BK)

### ORDERING GUIDE

Example: 8538WH-90-3K

Model	Finish	CRI	CCT	Retrofit
<b>8538</b>	<b>BK</b> Black	<b>-90</b>	<b>-3K</b> 3000	blank no retrofit option
	<b>BN</b> Brushed Nickel		<b>-4K</b> 4000	<b>-R</b> adds retrofit
	<b>OB</b> Oil Rubbed Bronze			
	<b>WH</b> White			

# 7" High Lumen Flat Lens Disk



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel housing with plastic lens
- 7-3/8" x 1" | 15W | 1240 lms
- Energy Star Listed
- CSAus Listed for wet location
- 5 Year Limited Warranty



White (WH)

### ORDERING GUIDE

Example: 8569WH-80-3K-R

Model	Finish	CRI	CCT	Retrofit
<b>8569</b>	<b>WH</b> White	<b>-80</b>	<b>-3K</b> 3000	blank no retrofit option <b>-R</b> adds retrofit



# 9" LED High Lumen Disk



- 120V - 60Hz
- 3000K, 4000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum Construction
- 9-1/2" x 1-1/4" | 30W | 2085 lms
- Energy Star Listed
- CSAus Listed for wet location
- JA8/Title 24 Compliant
- 5 Year Limited Warranty



White (WH)

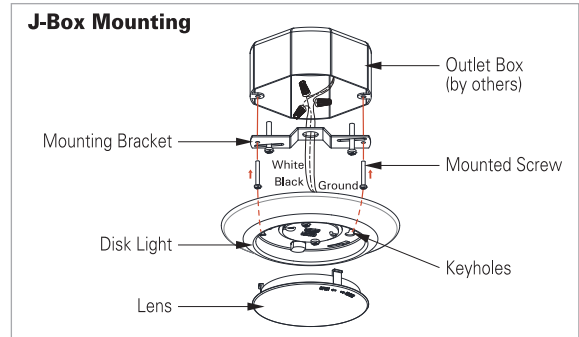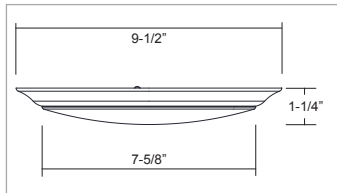

## ORDERING GUIDE

Example: 8554WH-90-3K

Model	Finish	CRI	CCT
<b>8554</b>	<b>WH</b> White	<b>-90</b> 90 CRI	<b>-3K</b> 3000K <b>-4K</b> 4000K

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# 12" / 14" / 16" Dome Ceiling Mount



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4336: 11-11/16" x 3-7/8" | 15W | 953 lms
- 4337: 14-1/8" x 4" | 23W | 1319 lms
- 4338: 16-1/2" x 4-7/16" | 34W | 1817 lms
- Energy Star Listed
- CSAus Listed for damp location
- 5 Year Limited Warranty



White (WH)

**ORDERING GUIDE** Example: 4336WH

Model	Finish	
4336	WH	White
4337		
4338		

# 11" / 14" Square Dome Ceiling Mount



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 4320: 10-11/16" x 2-7/8" | 15W | 1118 lms
- 4322: 14-1/2" x 3-1/8" | 23W | 1607 lms
- Energy Star Listed
- cCSAus Listed for damp location
- 5 Year Limited Warranty



White (WH)

**ORDERING GUIDE** Example: 4320WH

Model	Finish	
4320	WH	White
4322		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.



# 8" Wall Sconce



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with glass diffuser
- 8" x 8" x 4" | 9W | 630 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



Oil Rubbed Bronze (OB)    White (WH)

### ORDERING GUIDE

Example: 4503-30-BN

Model	Finish	
<b>4503-30</b>	-BN	Brushed Nickel
	-OB	Oil Rubbed Bronze
	-WH	White

# Half-Circle Wall Sconce



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 12" x 6" x 3-1/2" | 12W | 840 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)

### ORDERING GUIDE

Example: 4505-30-BN

Model	Finish	
<b>4505-30</b>	-BN	Brushed Nickel

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Indoor Residential Wall Sconce



- 120V - 60Hz
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Steel construction with acrylic diffuser
- 7" x 9-7/8" x 3-3/8" | 15W | 800 lms
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



Brushed Nickel (BN)



see 4406-30 for Wet Listed Outdoor use pg 178

**ORDERING GUIDE** Example: 4404-30-BN

Model	Finish
4404-30	-BN Brushed Nickel


*Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.*







# Vanity Lighting

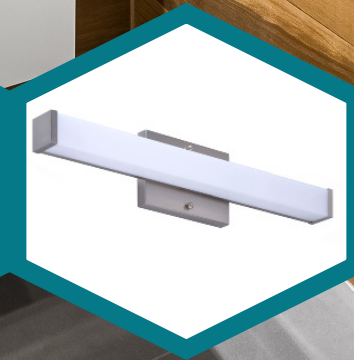

## Vanity Light Overview



**4909-2**  
2 Light Square Shade Vanity  
Page 126



**4909-3**  
3 Light Square Shade Vanity  
Page 126



**4909-4**  
4 Light Square Shade Vanity  
Page 126




**4908-1**  
1-Light Round Shade Vanity  
Page 127




**4904-2, 4908-2**  
2-Light Round Shade Vanity  
Page 127




**4904-3, 4908-3**  
3-Light Round Shade Vanity  
Page 127



**4904-4, 4908-4**  
4-Light Round Shade Vanity  
Page 127



**4906-18, 4906-24**  
18", 24" Linear Vanity  
Page 128



**4906-36, 4906-48**  
36", 48" Linear Vanity  
Page 128



**4907-18, 4907-24**  
18", 24" Slim Profile Linear Vanity  
Page 129



**4907-36, 4907-48**  
36", 48" Slim Profile Linear Vanity  
Page 129



**4906**  
Edge-Lit LED Ribbon  
Page 130



**4905**  
Edge-Lit LED Ribbon  
Page 131

## Warranty Information



**Integrated LED Lights**



**Other Components**

*Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.*


# Square Shade E26 LED Vanity Light



- 120V - 60 Hz
- Stainless Steel with Frosted Glass Square Shade
- 3000K | 80 CRI
- 9W E26 A19 LED Lamps Included
- Dimmable TRIAC, 10-100%
- Mounted either Up or Down position
- cETLus Listed for damp location
- CEC JA8 Compliant
- 1 Year Limited Warranty



4909-2

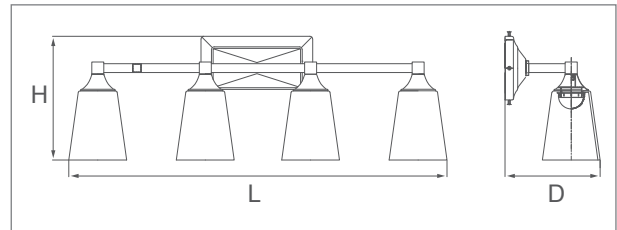

4909-3



4909-4

Model	Size (L x H x D)
4909-2	11-3/4" x 8-3/4" x 7"
4909-3	19-1/2" x 8-3/4" x 7"
4909-4	27-1/8" x 8-3/4" x 7"

## ORDERING GUIDE

Example: 4909BN-2

Model	Finish	# of Shades
4909	BN Brushed Nickel	-2
		-3
		-4

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



# Round Shade Vanity Light



- 120V - 60 Hz
- Stainless Steel with Frosted Glass Round Shade
- 3000K | 80 CRI
- 4904 - Integral LED
- 4908 - 9W E26 A19 LED Lamp Included
- Dimmable TRIAC, 10-100%
- Mounted either Up or Down position
- cETLus Listed for damp location
- Energy Star Listed
- 4908: CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty
- 4908: 1 Year Limited Warranty



**4908-1**



**4908-2**  
**4904-2 \***



**4908-3**  
**4904-3**



**4908-4**  
**4904-4**

Model	Size (L x H x D)	
<b>4908-1</b>	6-1/4" x 5-1/4" x 10"	
<b>4904/8-2</b>	13" x 5-1/4" x 10"	
<b>4904/8-3</b>	22-1/8" x 5-1/4" x 10"	
<b>4904/8-4</b>	31-1/8" x 5-1/4" x 10"	
Model	Wattage	Delivered Lumens
<b>4904-2</b>	15W	1050 lms
<b>4904-3</b>	25W	1755 lms
<b>4904-4</b>	30W	2110 lms

## ORDERING GUIDE

Example: 4904BN-2

Model	Finish		# of Shades
<b>4904</b>	BN	Brushed Nickel	-2 *
Integral LED			-3
			-4
Model	Finish		# of Shades
<b>4908</b>	BN	Brushed Nickel	-1
E26 A19 LED			-2
			-3
			-4

\* Not Energy Star Listed


Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Linear LED Vanity Light



LED Lamp Other Components


- 120V - 60 Hz
- Steel with Opal diffused acrylic lens
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- Horizontal or Vertically Mounted
- Beam Angle 120°
- cETLus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty




**4906-18**



**4906-24**



**4906-36**



**4906-48**

Model	Size (L x H x D)
<b>4906-18</b>	18" x 5-3/4" x 4-3/4"
<b>4906-24</b>	24" x 5-3/4" x 4-3/4"
<b>4906-36</b>	36" x 5-3/4" x 4-3/4"
<b>4906-48</b>	48" x 5-3/4" x 4-3/4"

Model	Wattage	Lumens (delivered)
<b>4906-18</b>	20W	1400 lms
<b>4906-24</b>	24W	1600 lms
<b>4906-36</b>	28W	2100 lms
<b>4906-48</b>	35W	2800 lms

### ORDERING GUIDE

Example: 4906BN-24

Model	Finish	Length
<b>4906</b>	<b>BN</b> Brushed Nickel	<b>-18</b>
		<b>-24</b>
		<b>-36</b>
		<b>-48</b>

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Slim Profile Linear Vanity Light



LED Lamp  
Other Components

- 120V - 60 Hz
- Steel with linear diffused acrylic lens
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Horizontal or Vertically Mounted
- Beam Angle 120°
- cETLus Listed for damp location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



**4907-18**



**4907-24**



**4907-36**



**4907-48**

Model	Size (L x H x D)
<b>4907-18</b>	18" x 4-1/2" x 2-5/8"
<b>4907-24</b>	24" x 4-1/2" x 2-5/8"
<b>4907-36</b>	36" x 4-1/2" x 2-5/8"
<b>4907-48</b>	48" x 4-1/2" x 2-5/8"

Model	Wattage	Lumens
<b>4907-18</b>	12W	1080lms Source, 700lms Delivered
<b>4907-24</b>	15W	1350lms Source, 900lms Delivered
<b>4907-36</b>	25W	2250lms Source, 1600lms Delivered
<b>4907-48</b>	30W	2700lms Source, 2000lms Delivered

## ORDERING GUIDE

Example: 4907BN-24




Model	Finish	Length
<b>4907</b>	<b>BN</b> Brushed Nickel	<b>-18</b>
		<b>-24</b>
		<b>-36</b>
		<b>-48</b>

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Curved LED Ribbon Vanity Light



- 120V - 60 Hz
- Steel with acrylic ribbon diffuser
- 3000K | 80 CRI
- 9W | 500 lms
- Dimmable TRIAC, 10-100%
- 10" L x 4-1/2" H x 3" W
- ETL Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

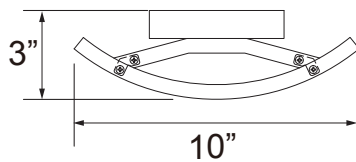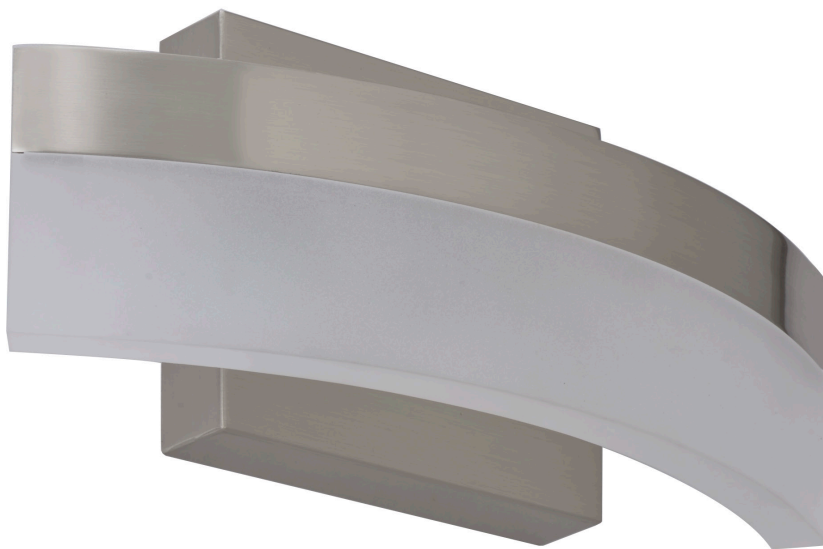

**ORDERING GUIDE** Example: 4506BN



Model	Finish	
4506	BN	Brushed Nickel

*Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.*

# Linear LED Ribbon Vanity Light



- 120V - 60 Hz
- Steel with acrylic ribbon diffuser
- 3000K | 80 CRI
- 22W | 1500 lms
- Dimmable TRIAC, 10-100%
- 24" L x 4-1/2" H x 3" W
- ETL Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



## ORDERING GUIDE Example: 4905BN-24

Model	Finish	Length
4905	BN Brushed Nickel	-24

Specifications and dimensions subject to change.  
 Lumens are delivered unless otherwise noted.  
 See website for most current information.



# Decorative Suspended



## Decorative Suspended Overview



**4603-3**

Round Shade Chandelier  
Page 134



**4603-5**

Round Shade Chandelier  
Page 134



**4601**

Chandelier Edge-Lit LED  
Round Ribbon Light  
Page 135



**4602**

Chandelier Edge-Lit LED  
Round Ribbon Light  
Page 135



**4604-4**

Linear Island LED Light  
Page 136



**4600**

Linear Edge-lit LED Ribbon Light  
Page 137



**4606**

Opal Glass LED Pendant Light  
Page 138



**4430**

Round Shade LED  
Pendant Light  
Page 139



**4605**

E26 LED Pendant Light  
Page 139

## Warranty Information



**Integrated LED Lights**



**Other Components**

*Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.*

# Round Shade Chandelier





- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 80 CRI
- Ceiling Canopy fits standard electrical box
- 9W E26 A19 LED Lamps Included
- Dimmable TRIAC, 10-100%
- Includes 36" of Brushed Nickel chain with power cord
- cETLus Listed for damp location
- Energy Star Listed
- 1 Year Limited Warranty

4603BN-3



4603BN-5

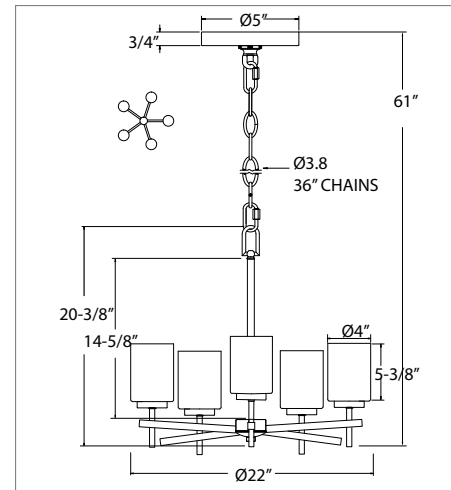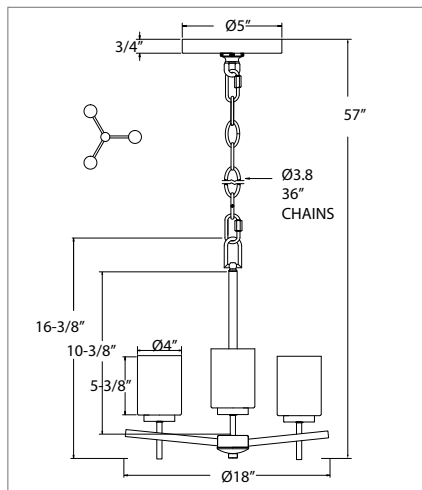

**ORDERING GUIDE** Example: 4603BN-3

Model	Finish		# of lights
4603	BN	Brushed Nickel	-3
			-5

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.



# Chandelier Edge-Lit LED Round Ribbon Light





LED Lamp Other Components

- 120V 60 Hz - Power Over Cable
- Metal with diffused acrylic ribbon lens
- 3000K | 80 CRI
- 4601 - 25W | 1750 lms delivered
- 4602 - 60W | 4200 lms delivered
- Dimmable TRIAC, 10-100%
- Adjustable 6' wire length
- cETLus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

4601



4602

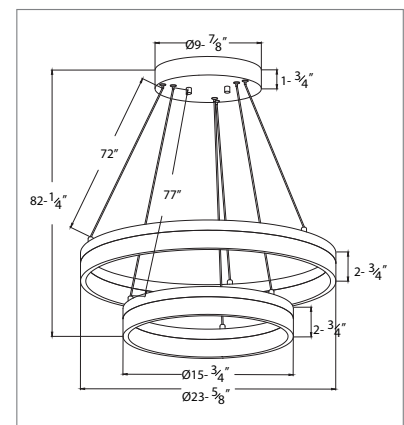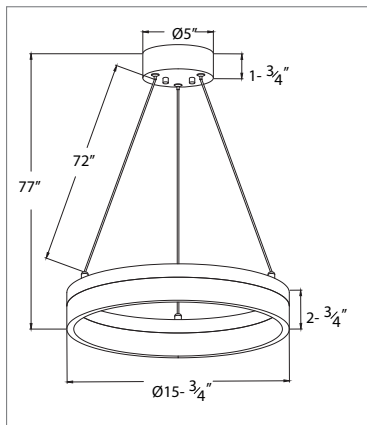

**ORDERING GUIDE** Example: 4601BN

Model	Finish
4601	BN Brushed Nickel

**ORDERING GUIDE** Example: 4602BN


Model	Finish
4602	BN Brushed Nickel

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Linear Island LED Light



- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 80 CRI
- Ceiling Canopy fits standard electrical box
- 9W E26 A19 LED Lamps Included
- Dimmable TRIAC, 10-100%
- Includes (2) 6" rods and (2) 12" rods per stem
- cETLus Listed for damp location
- Energy Star Listed
- 1 Year Limited Warranty

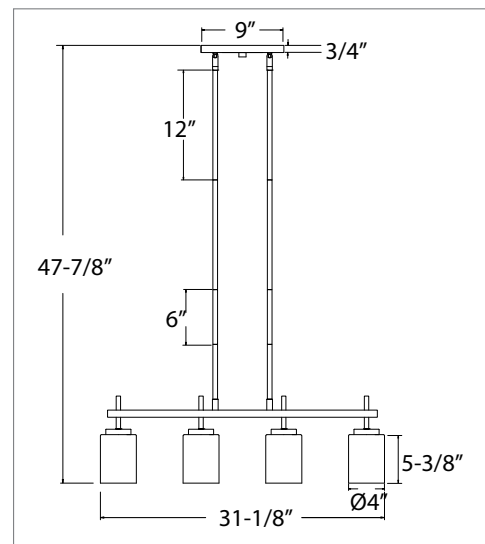

**ORDERING GUIDE** Example: 4604BN-4

Model	Finish	# of lights
4604	BN Brushed Nickel	-4

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.




# Linear Edge-lit LED Ribbon Light



LED Lamp  
Other Components

- 120V 60 Hz - Power Over Cable
- Metal with diffused acrylic ribbon lens
- 3000K | 80 CRI
- 28W | 1600 lms delivered
- Dimmable TRIAC, 10-100%
- Adjustable 6' wire length
- cETLus Listed for damp location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

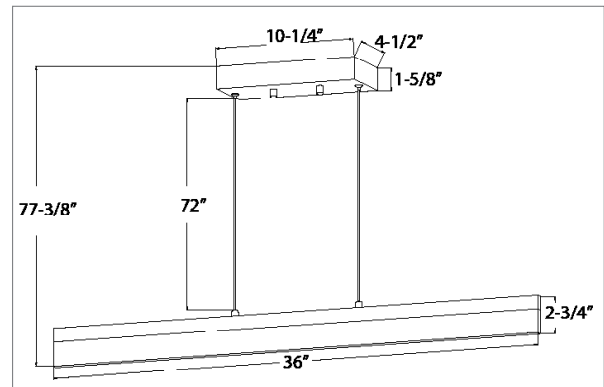

## ORDERING GUIDE Example: 4600BN

Model	Finish	
4600	BN	Brushed Nickel


*Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.*

# Opal Glass Pendant Light



LED Lamp  
Other Components

- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 90 CRI
- 1 x 9W E26 A19 LED, lamp included
- Dimmable TRIAC, 10-100%
- Adjustable 6' Cord
- CETLus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

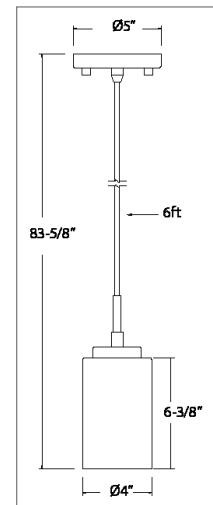

**ORDERING GUIDE** Example: 4606BN

Model	Finish	
4606	BN	Brushed Nickel


Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Round Shade Pendant Light



4430 LED Lamp  
Other Components

- 120V 60 Hz
- Steel with Frosted Opal Glass Shade
- 3000K | 80 CRI | 4605 - 80 CRI
- Ceiling Canopy fits standard electrical box
- 4430 - 8W | 600 lms
- 4605 - 9W E26 A19 LED Lamp Included
- Dimmable TRIAC, 10-100%
- Adjustable 6' Cord
- cETLus Listed for damp location
- Energy Star Listed
- 4430 LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

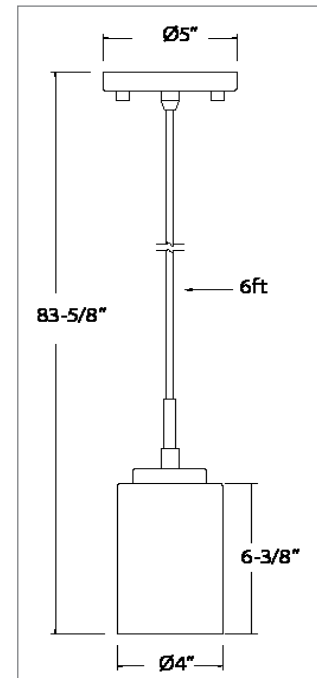

**4430**

Oil Rubbed Bronze (OB)



## ORDERING GUIDE

Example: 4430BN

Model	Finish	
<b>4430</b>	<b>BN</b>	Brushed Nickel
Integrated LED	<b>OB</b>	Oil Rubbed Bronze
Model	Finish	
<b>4605</b>	<b>BN</b>	Brushed Nickel
E26 A19 LED		

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Linear Lighting

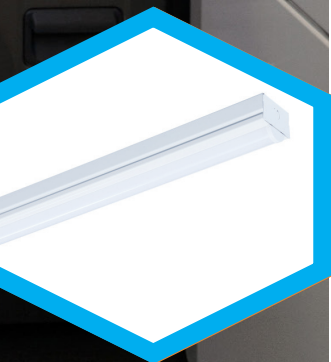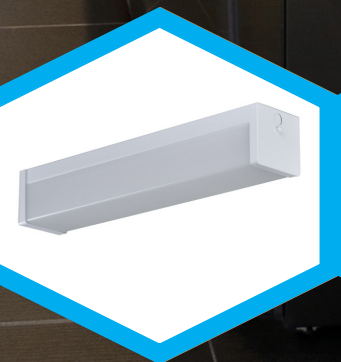

## Linear Lighting Overview



### 89xx

Slim Profile Under Cabinet Light  
Page 142



### 89xx-2734

CCT Selectable Under Cabinet Light  
Page 143



### 4115

Linear Stairwell - 2'  
Page 144



### 4116

Linear Stairwell - 4'  
Page 145



### 4105

4' LED Cloud  
Page 146



### 4106

4' LED Cloud  
Page 146



### 4217

4' Narrow Prismatic Wrap  
Page 147



### 4218

4' Wide Prismatic Wrap  
Page 147



### 4204

4' Euro Wrap  
Page 147



### 4309-4312

2' and 4' LED Strip Light  
Page 148



### 4117

2' Vapor Tight Linear Fixture  
Page 149



### 4120

2' Vapor Tight Linear Fixture  
Page 149

## Warranty Information



Integrated LED Lights



Other Components

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.




# Slim Profile Under Cabinet Light



LED Lamp Other Components

- 120 V 60 Hz
- Aluminum housing with Ribbed Acrylic Curved Lens
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Available in White or Brushed Aluminum Housing
- Linkable design for hardwire and plug-in
- Hinged wiring trough for easy access
- cCSAus Listed for damp location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

LINEAR LIGHTING

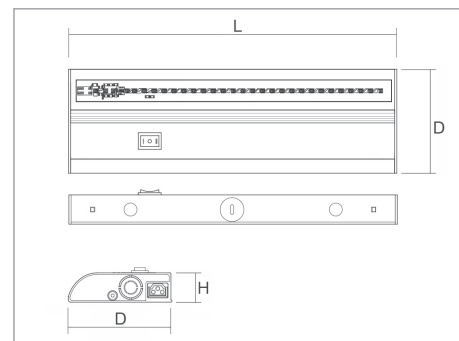

Model	Size (L x H x D)
8966	9" x 3-3/4" x 1-1/16"
8967	12" x 3-3/4" x 1-1/16"
8968	18" x 3-3/4" x 1-1/16"
8969	21" x 3-3/4" x 1-1/16"
8970	24" x 3-3/4" x 1-1/16"
8971	36" x 3-3/4" x 1-1/16"
8972	48" x 3-3/4" x 1-1/16"

Model	Wattage	Lumens (delivered)
8966	4W	200 lms
8967	5W	270 lms
8968	7W	420 lms
8969	8W	460 lms
8970	9W	580 lms
8971	13W	800 lms
8972	17W	1070 lms

## ORDERING GUIDE Example: 8966WH

Model	Finish
8966 9"	WH White
8967 12"	BA Brushed Aluminum
8968 18"	
8969 21"	
8970 24"	
8971 36"	
8972 48"	

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# CCT Selectable Under Cabinet Light




LED Lamp Components

- 120 V 60 Hz
- Aluminum housing with Ribbed Acrylic Curved Lens
- 90 CRI
- Dimmable TRIAC, 10-100%
- CCT Selectable - 2700K, 3000K, 4000K
- Available in White Housing
- Linkable design for hardwire and plug-in
- Hinged wiring trough for easy access
- cCSAus Listed for damp location
- Energy Star Listed
- CEC JA8 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Adjusted Color of Light with Intrgrated Switch

- SOFT WHITE (2700K)
- BRIGHT WHITE (4000K)
- DAYLIGHT (5000K)

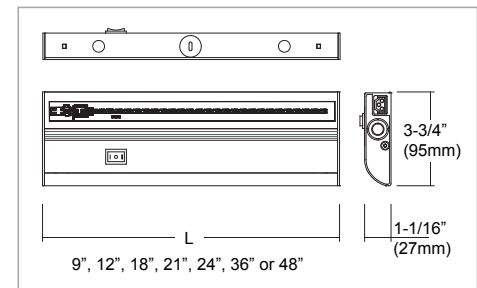

Model	Size (L x H x D)
<b>8966WH-2734</b>	9" x 3-3/4" x 1-1/16"
<b>8967WH-2734</b>	12" x 3-3/4" x 1-1/16"
<b>8968WH-2734</b>	18" x 3-3/4" x 1-1/16"
<b>8969WH-2734</b>	21" x 3-3/4" x 1-1/16"
<b>8970WH-2734</b>	24" x 3-3/4" x 1-1/16"
<b>8971WH-2734</b>	36" x 3-3/4" x 1-1/16"
<b>8972WH-2734</b>	48" x 3-3/4" x 1-1/16"

Model	Wattage	Lumens
<b>8966WH-2734</b>	4W	320lms Source, 250lms Delivered
<b>8967WH-2734</b>	5W	400lms Source, 315lms Delivered
<b>8968WH-2734</b>	7W	630lms Source, 500lms Delivered
<b>8969WH-2734</b>	8W	750lms Source, 595lms Delivered
<b>8970WH-2734</b>	9W	850lms Source, 670lms Delivered
<b>8971WH-2734</b>	13W	1140lms Source, 900lms Delivered
<b>8972WH-2734</b>	17W	1500lms Source, 1190lms Delivered

ORDERING GUIDE Example: 8966WH-2734


Model	Finish	CCT
<b>8966</b> 9"	<b>WH</b> White	<b>-2734</b> 2700K, 3000K, 4000K
<b>8967</b> 12"		
<b>8968</b> 18"		
<b>8969</b> 21"		
<b>8970</b> 24"		
<b>8971</b> 36"		
<b>8972</b> 48"		

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Linear Stairwell - 2'



- 120-277V Universal
- Steel Body with acrylic lens
- 4000K | 80 CRI
- 20W | 2100 lms delivered
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- Ceiling or Wall Mount
- cETLus Listed for damp location
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty

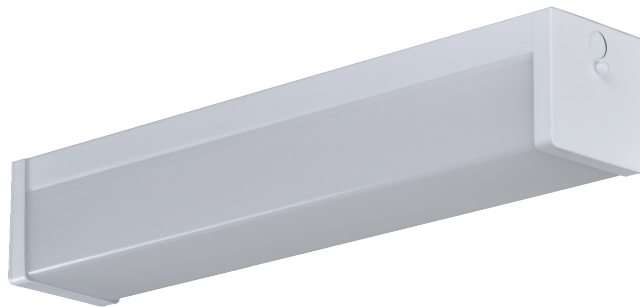


## 4115WH

2' Stairwell - NON-Dimmable

## 4115DM-WH

2' Stairwell - Dimmable 0-10V



Dimensions (L x W x H)  
24-1/4" x 4-1/4" x 4-5/8"

### ORDERING GUIDE

Example: 4115WH-OS-EM


Model	Finish	Motion Sensor Option	EM Battery Pack Option
<b>4115</b> 2' Non-Dimmable	<b>WH</b> White	<b>-OS</b> adds sensor	<b>-EM</b> adds Battery Pack
<b>4115DM</b> 0-10V Dimmable			

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Linear Stairwell - 4'




- 120-277V Universal
- Steel Body with acrylic lens
- 4000K | 80 CRI
- Ceiling or Wall Mount
- 4116 - 38W | 4150 lms delivered
- 4116DM - 40W | 4600 lms delivered
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- cETLus Listed for damp location
- 4116DM - DLC Listed
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty

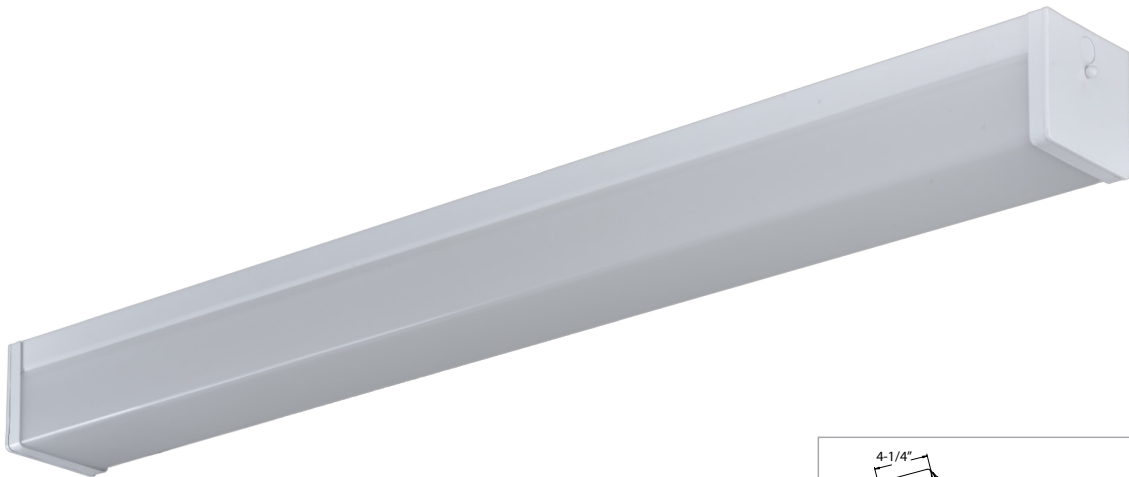

**4116WH**  
4' Stairwell - NON-Dimmable

**4116DM-WH**  
4' Stairwell - Dimmable 0-10V

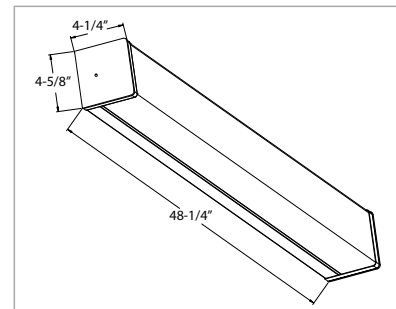

**Dimensions (L x W x H)**  
48-1/4" x 4-1/4" x 4-5/8"

**ORDERING GUIDE** Example: 4116WH-OS-EM

Model	Options
<b>4116WH</b>	blank no options
	-OS adds Microwave
	-EM add EM Battery
Model	Options
<b>4116DM-WH</b>	blank no options
	-OS adds Microwave
	-EM add EM Battery

*Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.*


# LED Cloud



- 120V / 277V
- Steel Body with white acrylic lens
- 4000K | 80 CRI
- 4105 - 35W | 2800 lms delivered
- 4106 - 70W | 5600 lms delivered
- Non-dimmable
- Ceiling Mount
- cETLus Listed for damp location
- Energy Star Listed
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty


## 4105-40-WH

4' Cloud

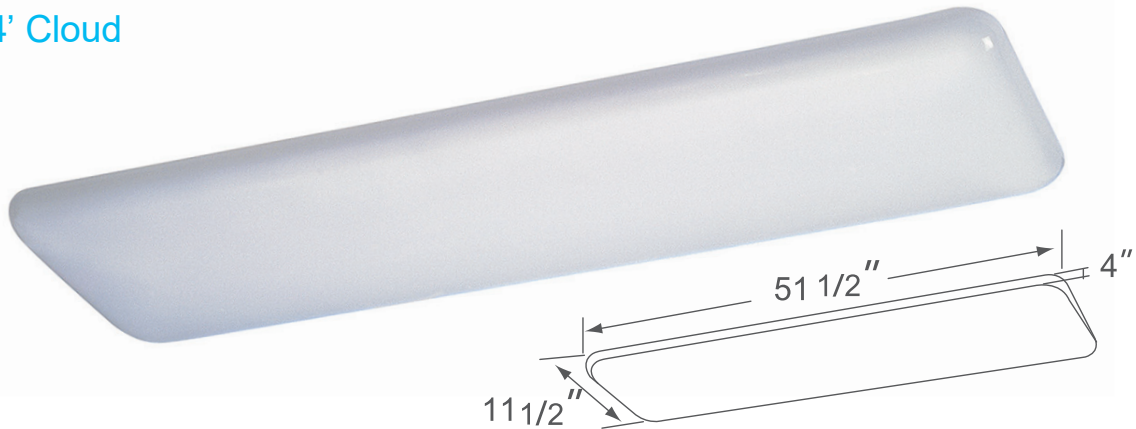

## 4106-40-WH

4' Cloud

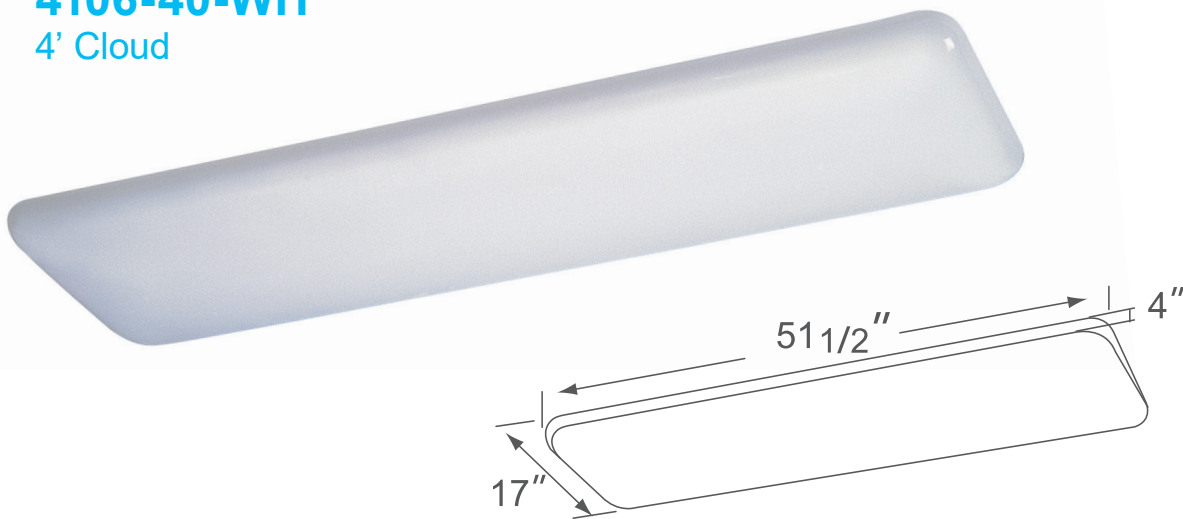

### ORDERING GUIDE

Example: 4105-40-WH

Model	Finish
4105-40 35W   2800 lms	-WH White
4106-40 70W   5600 lms	

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.





# LED Prismatic Wraparound




- 120V / 277V
- Steel housing with white acrylic prismatic lens
- 4000K | 80 CRI | Non-Dimmable
- Ceiling Mount
- 4217 - 35W | 3200 lms delivered
- 4218 - 75W | 7000 lms delivered
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- ETLus Listed for damp location
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty



**4217WH**  
4' Narrow Prismatic Wrap

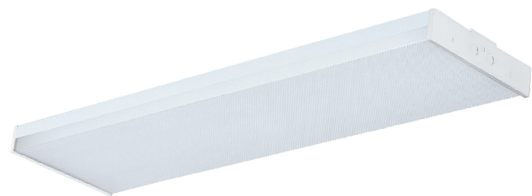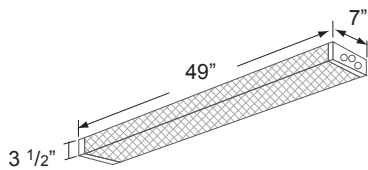

**4218WH**  
4' Wide Prismatic Wrap

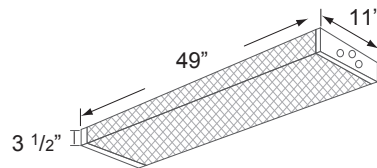

## ORDERING GUIDE


Example: 4117WH-OS-EM

Model	Options
<b>4217WH</b> 35W   3500 lms	blank no options -OS adds Microwave -EM add EM Battery
<b>4218WH</b> 75W   7000 lms	

# LED Euro Wrap



- 120V / 277V
- Steel housing with white acrylic lens and iron end caps
- 4000K | 80 CRI
- 35W | 2800 lms delivered
- Non-dimmable
- Ceiling Mount
- cETLus Listed for damp location
- LED lamp: 5 year Limited Warranty
- Other Components: 1 Year Limited Warranty

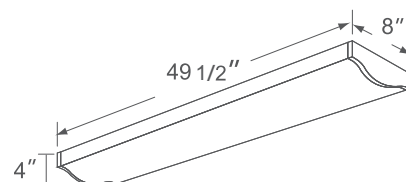

## ORDERING GUIDE

Example: 4204WH


Model
<b>4204WH</b> 4' Warp - 2800 lms

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# LED Strip Light



- 120-277V
- Steel housing with polycarbonate lens
- 4000K | 80 CRI
- Surface or Pendant Mount
- 0-10V Dimming
- Driver accessible from below ceiling
- CSAus Listed for damp location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

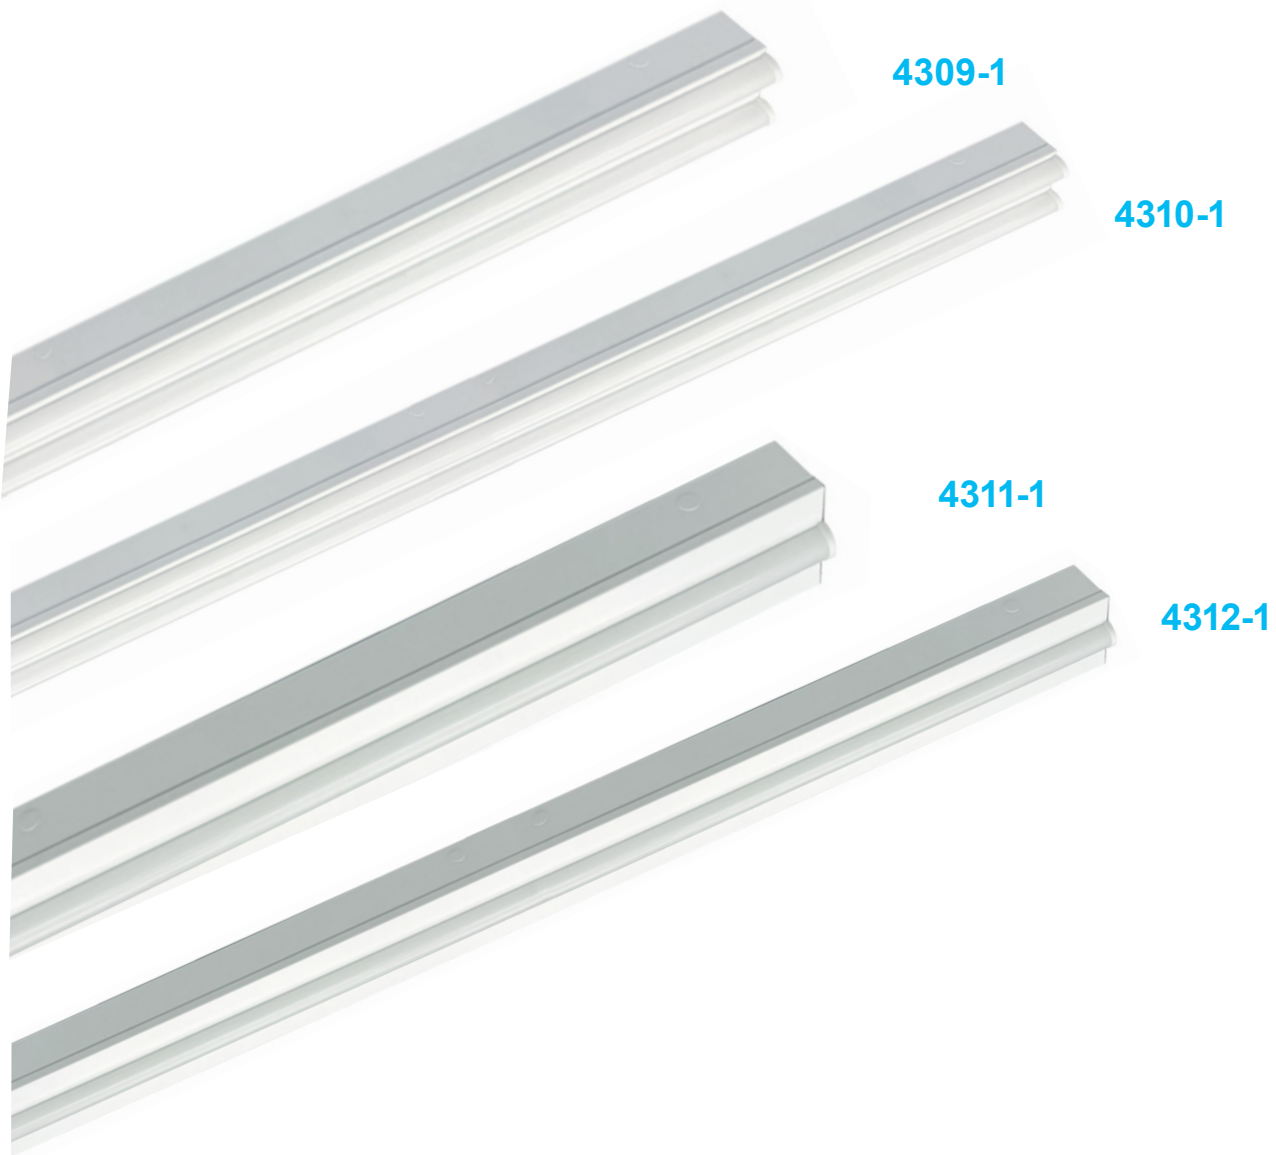

Model	Size (L x W x D)
<b>4309-1</b>	24" x 3-1/4" x 2-3/4"
<b>4310-1</b>	48" x 3-1/4" x 2-3/4"
<b>4311-1</b>	24" x 3-1/4" x 2-3/4"
<b>4312-1</b>	48" x 3-1/4" x 2-3/4"

Model	Wattage	Lumens (delivered)
<b>4309-1</b>	20W	2100 lms
<b>4310-1</b>	35W	3675 lms
<b>4311-1</b>	10W	1050 lms
<b>4312-1</b>	20W	2100 lms

**ORDERING GUIDE** Example: 4309WH-1

Model	EM Option
<b>4309WH-1</b>	<b>-EM</b> adds EM Battery Pack *
<b>4310WH-1</b>	
<b>4311WH-1</b>	
<b>4312WH-1</b>	

\* -EM option only available on 4310WH-1 and 4312WH-1


*Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.*

# Linear Vapor Tight




- 120-277V Universal
- Single piece polycarbonate body
- Gasketed polycarbonate lens
- Stainless Steel latches included
- 0-10V Dimming | 4000K | 80 CRI
- Operating Temp: -30oC to 50oC
- -OS - Microwave Daylight/Motion Sensor Option
- -EM - Emergency Battery Pack Option
- CSAus Listed for wet location
- IP65 Rated
- 4117-1 - DLC5.1 Listed
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

## 4117-1 Series

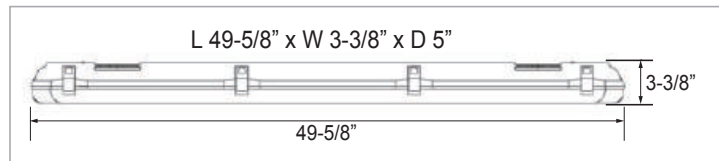

## 4120 Series

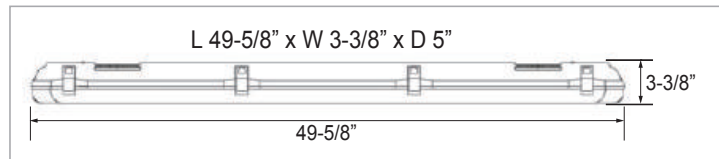

Model	Wattage	Lumens (delivered)
<b>4120-WH</b>	20W	2000 lms
<b>4117-1-WH-35</b>	35W	3675 lms
<b>4117-1-WH-50</b>	50W	5250 lms
<b>4117-1-WH-70</b>	70W	7350 lms

### ORDERING GUIDE

Example: 4117-1-WH-35-4K-MS-EM

Model	Options	Watts	CCT	Options
<b>4117-1</b>	-WH White	-35	-4K	blank no options
		-50		-MS adds Microwave
		-70		-EM adds EM Battery
Model	Options			
<b>4120-WH-20-4K</b>	blank			no options
	-MS			adds Microwave sensor

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Exit & Emergency



# Exit / Emergency Lighting Overview

## Exit



**RXL5**  
Standard Exit Sign  
Page 153



**RXL28**  
Exit Sign, Wet & Cold Location  
Page 153



**RXL17**  
Surface Mount Edge-lit Exit -  
Single Face  
Page 154



**RXL18**  
Surface Mount Edge-lit Exit -  
Double Face  
Page 154



**RXL33**  
Recessed Edge-lit Exit  
- Single Face  
Page 155



**RXL34**  
Recessed Edge-lit Exit  
- Double Face  
Page 155



**RXL15-1**  
Die Cast Exit Sign  
- Single Face  
Page 156



**RXL16-1**  
Die Cast Exit Sign  
- Double Face  
Page 156



**RXEL35**  
Recessed Edge-lit Exit/  
EM Combo - Single Face  
Page 157



**RXEL36**  
Recessed Edge-lit Exit/  
EM Combo - Double Face  
Page 157



**RXEL25**  
Exit/Emergency Combo,  
Wet & Cold  
Page 157



**RXEL37**  
Standard Exit/Emergency  
Combo  
Page 158



**RXEL38**  
High Output Exit/  
Emergency Combo  
Page 158



**RXEL39**  
High Output Remote Capable  
Exit/Emergency Combo  
Page 159



**RXEL40**  
High Output Self Diagnostic  
Exit/Emergency Combo  
Page 159



# Exit / Emergency Lighting Overview

## Emergency



**REL35**  
Recessed 2-Head  
Emergency Light  
Page 160



**REL20, REL21**  
Compact Emergency,  
Compact High Output Emergency  
Page 161



**REL22, REL23**  
Remote Head Capable Emergency,  
Self Diagnostic Emergency  
Page 162



**REL6LED**  
Compact High-Lumen  
Emergency  
Page 163



**REL7LED**  
Die Cast Exit Sign  
Page 164



**REL5LED**  
Outdoor Full Cutoff Emergency  
Page 164



**RH17**  
Wet Location Remote Head  
Page 165



**RH18**  
Wet Location Remote Heads  
Page 165



**RH21, RH22**  
1 and 2 Indoor Remote Heads  
Page 165



**4783EM**  
Constant Power Emergency  
LED Battery Back-up  
Page 166



**4782EM**  
Emergency LED Battery  
Back-up  
Page 166



**4785**  
7" LED Flush Mount  
Emergency Back-up  
Page 167

## Warranty Information



**Integrated LED Lights**



**Other Components**

# Standard Exit Sign



LED Lamp Other Components

- 120V/277V
- Flame-rated Thermoplastic Housing
- Single or Double Face

- Operating Temp: 10°C to 40°C
- 2.4V, 300 mAh Ni-Cad Battery
- Wall, Ceiling, or End Mount
- Self-diagnostic Option Available


- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Green Letters with White Housing



Red Letters with White Housing

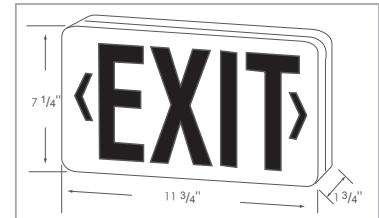

## ORDERING GUIDE

Example: RXL5RW

Model	Lettering/Housing	Self-diagnostic Option
<b>RXL5</b> Standard Exit Sign	<b>RW</b> White with Red Lettering <b>RB</b> Black with Red Lettering <b>GW</b> White with Green Lettering <b>GB</b> Black with Green Lettering	blank no SD Option <b>-SD</b> Self-Diagnostic*

\* Only available on RXL5RW and RXL5GW

# Exit Sign, Wet & Cold Location



LED Lamp Other Components

- 120V/277V
- Polycarbonate Lens and Waterproof Thermoplastic Housing
- Single or Double Face

- Operating Temp: -25°C to +50°C
- 3.6V, 400 mAh Ni-Cad Battery
- Wall, Ceiling, or End Mount


- UL Listed for wet and cold location to UL924 standards
- CEC Title 20 Compliant
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Green Letters with White Housing



Red Letters with White Housing

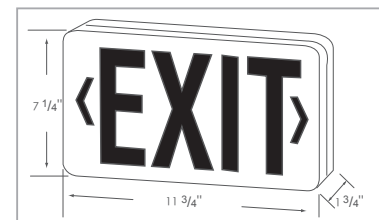

## ORDERING GUIDE

Example: RXL28RW

Model	Lettering/Housing
<b>RXL28</b> Exit Sign, Wet & Cold Listed	<b>RW</b> White with Red Lettering <b>GW</b> White with Green Lettering

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Surface Mount Edge-lit Exit - Single Face



- 120V/277V
- Die-cast Aluminum Housing
- Clear Acrylic Thermoplastic Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount


- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



LED Green Letters, Single Face



LED Red Letters, Single Face

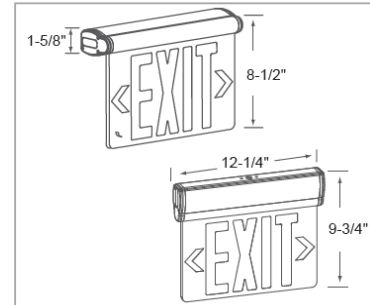

### ORDERING GUIDE

Example: RXL17RW

Model	Lettering/Housing	Self-diagnostic Option
<b>RXL17</b>	<b>RW</b> Red w/white housing	blank no SD option
Surface Mount	<b>RBA</b> Red w/brushed aluminum housing	<b>-SD</b> Self-Diagnostic
Edge-lit Exit -	<b>GW</b> Green w/white housing	
Single Face	<b>GBA</b> Green w/brushed aluminum housing	

# Surface Mount Edge-lit Exit - Double Face



- 120V/277V
- Die-cast Aluminum Housing
- Clear Acrylic Thermoplastic Double Mirror Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount


- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



LED green letters, double face



LED red letters, double face

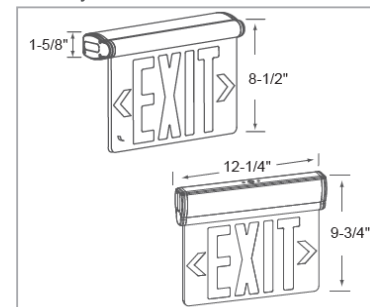

### ORDERING GUIDE

Example: RXL18RW

Model	Lettering/Housing	Self-diagnostic Option
<b>RXL18</b>	<b>RW</b> Red w/white housing	blank no SD option
Surface Mount	<b>RBA</b> Red w/brushed aluminum housing	<b>-SD</b> Self-Diagnostic
Edge-lit Exit -	<b>GW</b> Green w/white housing	
Double Face	<b>GBA</b> Green w/brushed aluminum housing	

### Operation

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 24 hours.

*Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.*

# Recessed Edge-lit Exit - Single Face



LED Lamp Other Components

- 120V/277V
- Aluminum Housing & Back Box
- Clear Acrylic Thermoplastic Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount


- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



LED Green Letters, Single Face



LED Red Letters, Single Face

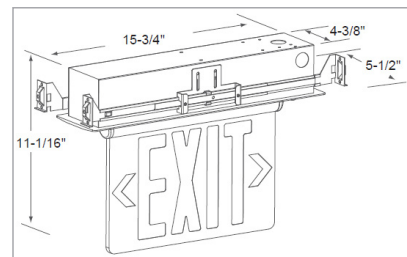

## ORDERING GUIDE

Example: RXL33RW

Model	Lettering/Housing
<b>RXL33</b>	<b>RW</b> Red with white housing
Recessed	<b>RBA</b> Red with brushed aluminum housing
Edge-lit Exit -	<b>GW</b> Green with white housing
Single Face	<b>GBA</b> Green with brushed aluminum housing

# Recessed Edge-lit Exit - Double Face



LED Lamp Other Components

- 120V/277V
- Aluminum Housing & Back Box
- Clear Acrylic Thermoplastic Double Mirror Faceplate
- Operating Temp: 10°C to 40°C
- 4.8V, 300 mAh Ni-Cad Battery
- Wall or Ceiling Mount


- UL Listed for damp location to UL 924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



LED Red Letters, Double Face



LED Green Letters, Double Face

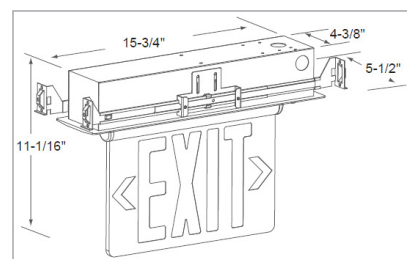

## ORDERING GUIDE

Example: RXL34RW

Model	Lettering/Housing
<b>RXL34</b>	<b>RW</b> Red w/white housing
Recessed	<b>RBA</b> Red w/brushed aluminum housing
Edge-lit Exit -	<b>GW</b> Green w/white housing
Double Face	<b>GBA</b> Green w/brushed aluminum housing

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

## Die Cast Exit Sign - Single Face



LED Lamp  
Other Components

- 120V/277V
- Die Cast Aluminum Housing
- Die Cast Aluminum Faceplate
- Operating Temp: 10°C to 40°C
- Red Lettering - 2.4V, 300 mAh Ni-cad Battery; Green Lettering - 3.6V, 300 mAh Ni-cad Battery
- Wall, Ceiling or End Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty




**RXL15-1GBA**

LED Green Letters, Single Face



**RXL15-1RBA**

LED Red Letters, Single Face

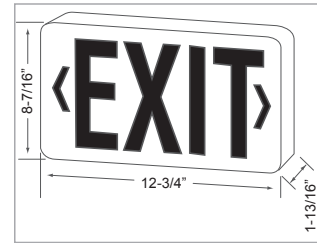

### ORDERING GUIDE

Example: RXL15-1RBA

Model	Lettering/Housing
<b>RXL15-1</b> Die Cast Exit Sign - Single Face	<b>RBA</b> Red with brushed aluminum housing <b>GBA</b> Green with brushed aluminum housing

## Die Cast Exit Sign - Double Face



LED Lamp  
Other Components

- 120V/277V
- Die Cast Aluminum Housing
- Die Cast Aluminum Faceplates
- Operating Temp: 10°C to 40°C
- Red Lettering - 2.4V, 300 mAh Ni-cad Battery; Green Lettering - 3.6V, 300 mAh Ni-cad Battery
- Wall, Ceiling or End Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty




**RXL16-1RBA**

LED Red Letters, Double Face



**RXL16-1GBA**

LED Green Letters, Double Face



### ORDERING GUIDE

Example: RXL16-1RBA

Model	Lettering/Housing
<b>RXL16-1</b> Die Cast Exit Sign - Double Face	<b>RBA</b> Red with brushed aluminum housing <b>GBA</b> Green with brushed aluminum housing

### Operation

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 24 hours.



# Recessed Edge-lit Exit/ Emergency Combo



LED Lamp Other Components

- 120V/277V
- Polycarbonate Lens and Waterproof Thermoplastic Housing
- Single or Double Face

- Operating Temp: 10°C to +40°C
- 3.6V, 1800 mAh Ni-MH
- Two Adjustable Heads: 1.5W total | 250 lms total
- Wall, Ceiling or End Mount


- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty




**RXEL35GBA**



**RXEL36RBA**

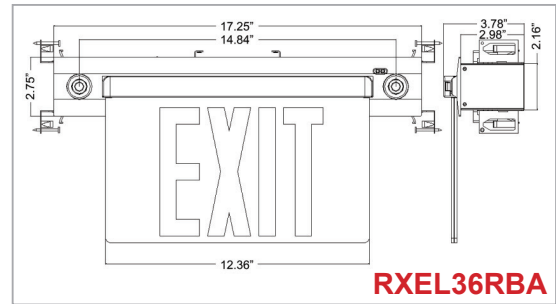

**RXEL36RBA**

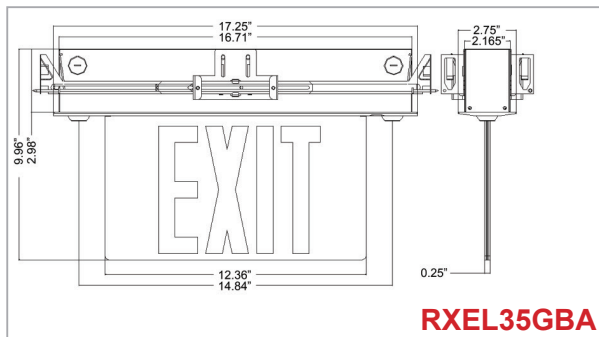

**RXEL35GBA**

## ORDERING GUIDE

Example: RXEL35RBA

Model	Lettering/Housing
<b>RXEL35</b> Single Faceplate	<b>RBA</b> Red letters, brushed aluminum housing <b>GBA</b> Green letters, brushed aluminum housing
<b>RXEL36</b> Double Faceplate	

# Exit/Emergency Combo, Wet & Cold



LED Lamp Other Components

- 120V/277V
- Polycarbonate Lens and Waterproof Thermoplastic Housing
- Single or Double Face

- Operating Temp: -25°C to +50°C
- 2 x 3.6V, 1000 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 0.75W | 180 lms total
- Wall, Ceiling or End Mount


- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



**RXEL25RW**  
LED red letters with white housing



**RXEL25GW**  
LED green letters with white housing

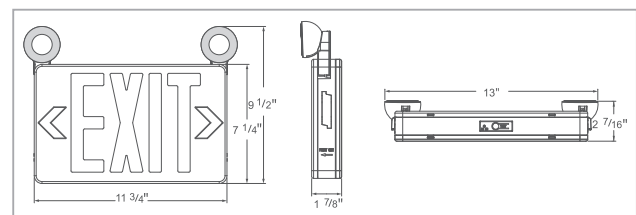

## ORDERING GUIDE

Example: RXEL25RW

Model	Lettering/Housing
<b>RXEL25</b> Two-Head LED Exit/Emergency Combo, Wet & Cold	<b>RW</b> Red with white housing <b>GW</b> Green with white housing

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Standard Exit/Emergency Combo



LED Lamp  
Other Components

- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Operating Temp 10°C to 40°C
- 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 1W | 150 lms total
- Wall, Ceiling or End Mount
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty




**RXEL37RW**

LED red letters with white housing



**RXEL37GW**

LED green letters with white housing

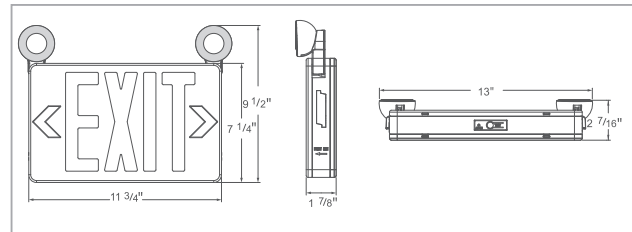

## ORDERING GUIDE

Example: RXEL37RW

Model	Lettering/Housing
<b>RXEL37</b>	<b>RW</b> Red with white housing
Standard Exit/ Emergency Combo	<b>GW</b> Green with white housing

# High Output Exit/Emergency Combo



LED Lamp  
Other Components

- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Wall, Ceiling or End Mount
- Operating Temp: 10°C to 40°C
- 2 x 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 2W | 250 lms total
- UL Listed for damp location to UL 924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty




**RXEL38RW**

LED red letters with white housing



**RXEL38GW**

LED green letters with white housing

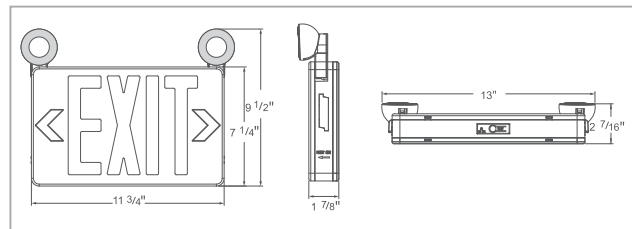

## ORDERING GUIDE

Example: RXEL38RW

Model	Lettering/Housing
<b>RXEL38</b>	<b>RW</b> Red with white housing
High Output Exit/ Emergency Combo	<b>GW</b> Green with white housing

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# High Output Remote Capable Exit/Emergency Combo




- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Wall, Ceiling or End Mount
- Operating Temp: 10°C to 40°C
- 2 x 3.6V, 1500 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 2W | 250 lms total
- 3.6V, 1W or 3.6V, 2W Remote Head Available
- UL Listed for damp location to UL 924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



**RXEL39RW**  
LED red letters with white housing



**RXEL39GW**  
LED green letters with white housing

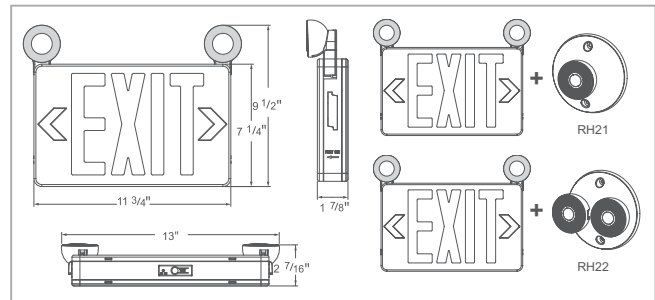

## ORDERING GUIDE

Example: RXEL39RW

Model	Lettering/Housing
<b>RXEL39</b> High Output Remote Capabe Exit/Emergency Combo	<b>RW</b> Red with white housing <b>GW</b> Green with white housing

# High Output Self Diagnostic Exit/Emergency Combo




- 120V/277V
- Thermoplastic Housing
- Single or Double Face
- Wall, Ceiling or End Mount
- Operating Temp: 10°C to 40°C
- 2 x 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 2W | 250 lms total
- Self-diagnostic Standard
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



**RXEL40RW-SD**  
Self-diagnostic LED red letters with white housing



**RXEL40GW-SD**  
Self-diagnostic LED green letters with white housing

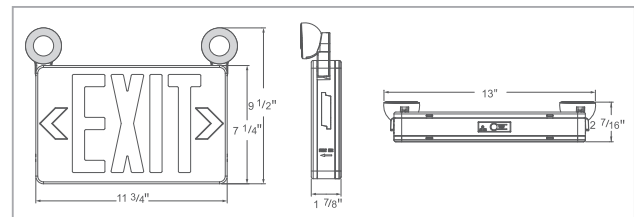

## ORDERING GUIDE

Example: RXEL40RW-SD

Model	Lettering/Housing	Self-diagnostic
<b>RXEL40</b> High Output Self Diagnostic Exit/Emergency Combo	<b>RW</b> Red with white housing <b>GW</b> Green with white housing	<b>-SD</b> Self-diagnostic Standard


Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Recessed 2-Head Emergency Light




LED Lamp  
Other Components

- 120V/277V
- Aluminum Trim Plate & Recessed Housing
- IC Rated for Recessed Ceiling or Wall Mount
- Operating Temp: 10°C to 40°C
- 3.6V, 1800 mAh Ni-MH Battery
- Adjustable Heads: 2 x 1.5W | 250 lms total
- UL Listed for damp location to UL924 standard
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

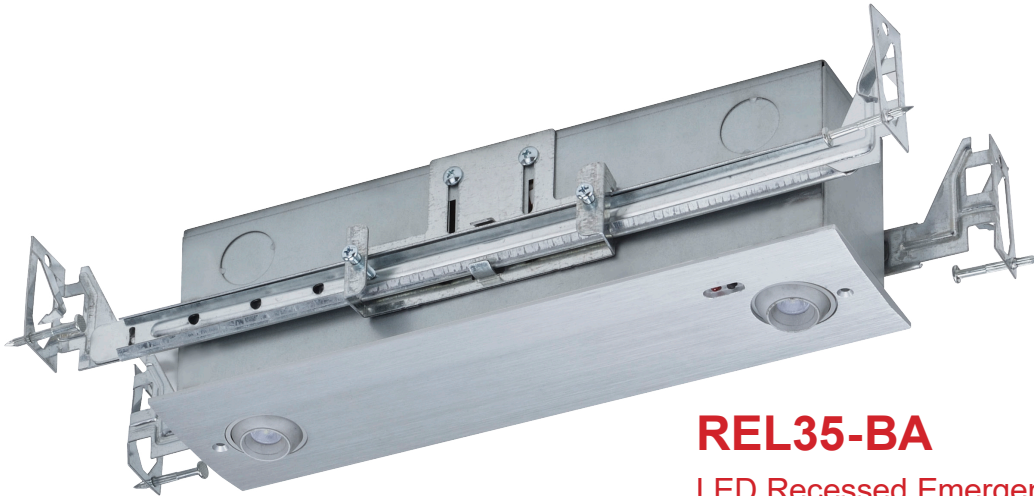

## REL35-BA

LED Recessed Emergency Lighting

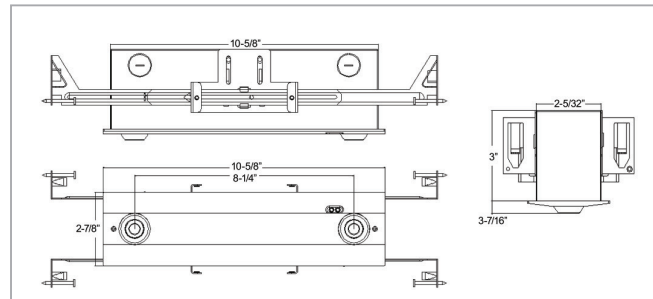

### ORDERING GUIDE

Example: REL35-BA

Model	Finish
REL35-	BA Brushed Aluminum

#### Operation

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 12 hours.

# Compact Emergency




LED Lamp Other Components

- 120V/277V
- White Thermoplastic Housing
- Adjustable Clear Lens Heads
- Std. Operating Temp: 10°C to 40°C
- Std. 3.6V, 900 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 1W | 160 lms
- Cold Weather Option: -10°C to 40°C
- 3.6V, 1500 mAh Ni-MH Battery
- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



**REL-200**

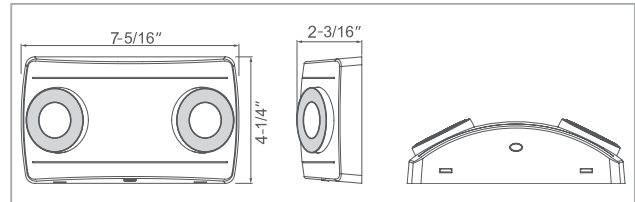

## ORDERING GUIDE

Example: REL20

Model	Description
<b>REL20</b>	Wide Lens
<b>REL20-N</b>	Narrow Lens
<b>REL20-C</b>	Wide Lens/Cold Weather
Accessory	Description
<b>REL-200</b>	Wet Location Cover

# Compact High Output Emergency




LED Lamp Other Components

- 120V/277V
- Thermoplastic Housing
- Adjustable Clear Lens Heads
- Std. Operating Temp: 10°C to 40°C
- Std. 3.6V, 1500 mAh Ni-Cad Battery
- Adjustable Heads: 2 x 1.5W | 2 x 125 lms
- Cold Weather Option: -10°C to 40°C
- 2 x 3.6V, 1500 mAh Ni-MH Battery
- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



**REL-200**

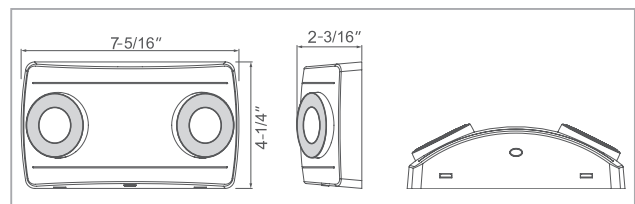

## ORDERING GUIDE

Example: REL21

Model	Description
<b>REL21</b>	Wide Lens/White Housing
<b>REL21-BK</b>	Wide Lens/Black Housing
<b>REL21-C</b>	Wide Lens/Cold Weather/White Housing
<b>REL21-N</b>	Narrow Lens/White Housing
Accessory	Description
<b>REL-200</b>	Wet Location Cover

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



# Compact High Output Remote Head Capable Emergency




LED Lamp Other Components

- 120V/277V
- White Thermoplastic Housing
- Adjustable Clear Lens Heads
- Adjustable Heads: 2 x 1.4W | 2 x 135 lms
- Std. Operating Temp: 10°C to 40°C
- 3.6V, 1500 mAh Ni-MH Battery
- 3.6V, 1W or 3.6V, 2W Remote Heads Available
- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



**REL-200**

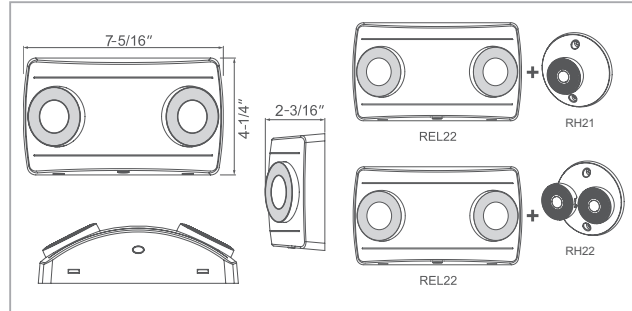

### ORDERING GUIDE

Example: REL22

Model	Description
<b>REL22</b>	Wide Lens
<b>REL22-N</b>	Narrow Lens
Accessory	Description
<b>REL-200</b>	Wet Location Cover

# Compact High Output Self Diagnostic Emergency




LED Lamp Other Components

- 120V/277V
- White Thermoplastic Housing
- Adjustable Clear Lens Heads
- Adjustable Heads: 2 x 1.4W | 2 x 135 lms
- Std. Operating Temp: 10°C to 40°C
- Std. 3.6V, 900 mAh Ni-Cad Battery
- Cold Weather Option: -10°C to 40°C; 3.6V, 1500 mAh Ni-MH Battery
- Self Diagnostic Standard
- UL Listed for damp location to UL924 standards
- LED Lamps: 5 Year Limited Warrant
- Other Components: 1 Year Limited Warranty



**REL-200**

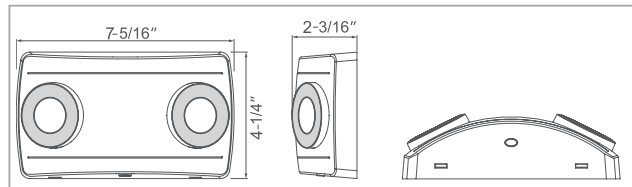

### ORDERING GUIDE

Example: REL23-SD

Model	Description
<b>REL23-SD</b>	Wide Lens/Self Diagnostic
<b>REL23-SD-C</b>	Wide Lens/Self Diagnostic/Cold Weather
<b>REL23-N-SD</b>	Narrow Lens/Self Diagnostic
<b>REL23-N-SD-C</b>	Narrow Lens/Self Diagnostic/Cold Weather
Accessory	Description
<b>REL-200</b>	Wet Location Cover


Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# Compact High-Lumen Emergency



LED Lamp      Other Components

- 120-277V Universal Voltage
- White Thermoplastic Housing
- High Lumen Adjustable Lens Heads
- Self Diagnostic Option Available
- Std. Operating Temp: 10°C to 40°C
- 9.6V, 3000 mAh LiFePO4 Battery High lumen
- 9.6V, 1500 mAh LiFePO4 Battery Standard lumen
- Std Output Heads: 2 x 2.7W | 600 lms total
- High Output Heads: 2 x 5.4W | 1300 lms
- 3.6V, 1W or 3.6V, 2W Remote Heads Available
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

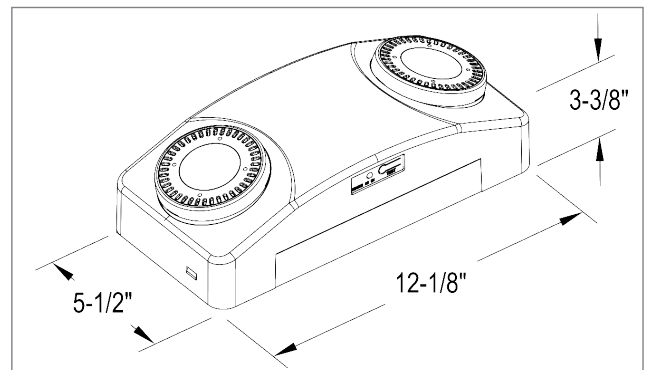

EXIT/EMERGENCY LIGHTING

## ORDERING GUIDE

Example: REL6LED-WH


Model	Description
<b>REL6LED-WH</b>	Standard Output
<b>REL6LED-WH-SD</b>	Standard Output/Self Diagnostic
<b>REL6LED-WH-HO</b>	High Output
<b>REL6LED-WH-HO-SD</b>	High Output/Self Diagnostic

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Outdoor Die Cast Emergency



- 120-277V Universal Voltage
- Die Cast Aluminum Housing
- Gasketed Polycarbonate Lens
- Self Diagnostic Standard
- Photosensor Included
- Std. Operating Temp: 0°C to 50°C
- 4.8V, 1800 mAh Ni-Cad Battery
- 15W | 1300 lms | 5000K | 80 CRI
- Cold Weather Option: -20°C to 50°C
- UL Listed for damp location to UL924 standards
- IP65 Rated
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



### ORDERING GUIDE

Example: REL7LED-OB-C

Model	Finish	Cold Weather Option
<b>REL7LED</b>	-OB Oil Rubbed Bronze -WH White	-C Cold Weather Heatpad


#### Operation

When normal utility power fails, the internal solid-state transfer switch automatically connects the internal battery to the LED lamps, lighting a path of egress for no less than 90 minutes. When utility power is restored the battery is recharged by the onboard solid-state recharger. Full recharge is accomplished within 12 hours.

# Outdoor Full Cutoff Emergency



- 120-277V Universal Voltage
- Die Cast Aluminum Housing
- Gasketed Polycarbonate Lens
- Self Diagnostic Standard
- Photosensor Included
- Std. Operating Temp: 0°C to 50°C
- 7.2V, 2000 mAh Ni-Cad Battery
- 18W | 1750 lms | 4000K | 80 CRI
- Cold Weather Option: -25°C to 50°C
- UL Listed for damp location to UL924 standards
- CEC Title 20 Compliant
- LED Lamps: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

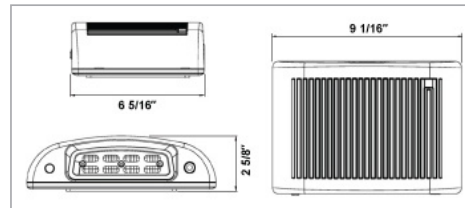

### ORDERING GUIDE

Example: REL5LED-OB-C

Model	Finish	Cold Weather Option
<b>REL5LED</b>	-OB Oil Rubbed Bronze -WH White	-C Cold Weather Heatpad

#### Operation

An ultra slim profile, integrated photocell, cold weather heatpad and emergency battery with self-diagnostics. The design provides emergency lighting that increases safety, security, and visibility in commercial and industrial applications.

*Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.*



# Wet Location Remote Heads



- White Thermoplastic ABS Housing
- Adjustable Heads

- DC 3V - 12V Input
- LED Lamp: 1 x 1W | 2 x 1W
- Fits Standard Electrical Box

- UL Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

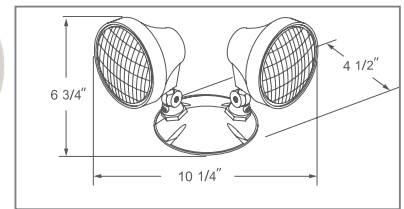

## ORDERING GUIDE

Example: RH17

Model	Description
<b>RH17</b>	Single Wet Remote Head
<b>RH18</b>	Double Wet Remote Heads



# Indoor Remote Heads



- White Thermoplastic ABS Housing
- Adjustable Heads: Narrow and Wide Lens

- DC 3.6V Input
- LED Lamp: 1 x 1W | 2 x 1W
- Fits Standard Electrical Box

- UL Listed for damp location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



## ORDERING GUIDE

Example: RH21


Model	Description
<b>RH21</b>	Single Head/Wide Lens
<b>RH21-N</b>	Single Head/Narrow Lens
<b>RH22</b>	Double Head/Wide Lens
<b>RH22-N</b>	Double Head/Narrow Lens

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Constant Power Emergency LED Battery Back-up



- 120-277 Universal Voltage
- Operates for minimum 90 minutes when normal power fails
- Operating Temp: 10°C to 50°C
- 9.6V, 3000 mAh LiFePO4 Battery
- AC Input Power: 7W
- Output Power: 12W Constant Power
- Output Voltage: 10-60VDC
- UL Listed to UL924 Standard
- Field or Factory Installation (Indoor/Damp)
- IC Rated for use in Plenum
- 1 Year Limited Warranty

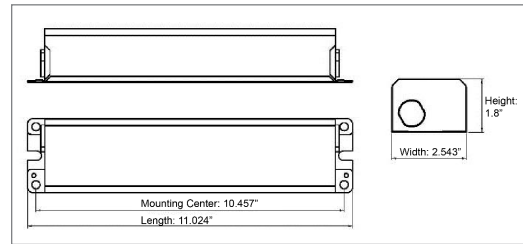

### ORDERING GUIDE

**Model**  
**4783EM**


#### Operation

Universal Battery Back-up for AC and DC LED fixtures in case of power failure.

# Emergency LED Battery Back-up



- 120-277V Universal Voltage
- Operates 120V LED (120V) or DC LED (with driver) for minimum 90 minutes when normal power fails
- Operating Temp: 0°C to 50°C
- 11.1V, 2600 mAh Li-Ion Battery
- AC Input Power: 3.5W
- Output Power: 9W (+/-10%)
- Output Voltage: 24V - 120V DC
- cULus Listed to UL924 Standard
- Field or Factory Installation (Indoor/Damp)
- 1 Year Limited Warranty

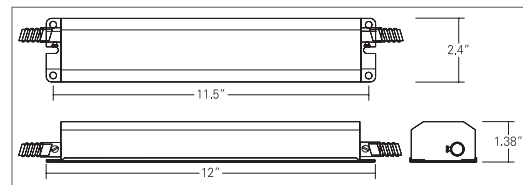

### ORDERING GUIDE

**Model**  
**4782EM**

Universal Battery Back-up for AC and DC LED fixtures in case of power failure.


*Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.*



# 7" LED Flush Mount Emergency Back-up



- 120V - 60Hz
- For use with 8536 or 8539 Disks Only
- Non-Switch Loads Only (Always On)
- Emergency Output - 600 nominal lumens
- Operating Temperature - 0°C to +55°C
- 11.1V , 2600 mAh Ni-MH Battery
- 4785EM: UL Listed for damp location to UL924 standards
- 1 Year Limited Warranty

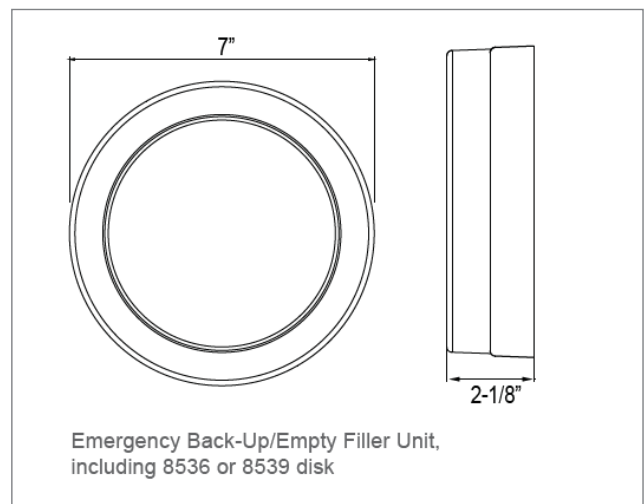

see 8536 or 8539 for  
Compatible Disks  
pg 108

*Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.*

## ORDERING GUIDE

Example: 4785EM

Model	Description
<b>4785EM</b>	EM Batter Backup with Test Switch
<b>4785F</b>	Empty Filler Housing Only

# Outdoor Lighting



## Outdoor Lighting Overview



**4423**  
3" LED Architectural  
Cylinder Downlight  
Page 171



**4424**  
3" LED Architectural Cylinder  
Up & Downlight  
Page 171



**4425**  
4" LED Architectural  
Cylinder Downlight  
Page 172



**4426**  
4" LED Architectural Cylinder  
Up & Downlight  
Page 172



**4427**  
4" LED Architectural Square  
Cylinder Downlight  
Page 173



**4428**  
4" LED Architectural Square  
Cylinder Up & Downlight  
Page 173



**4420**  
9" Outdoor LED Bulkhead  
Page 174



**4421**  
9" Outdoor LED Bulkhead  
Page 174



**4422**  
9" Outdoor LED Bulkhead  
Page 174

# Outdoor Lighting Overview



**4429**  
Outdoor Wall Pack  
Page 175



**4432-1**  
Adjustable Full-Cutoff Wall Pack  
Page 175



**4715**  
11" Wet Location Ceiling Mount  
Page 176



**4401**  
Residential Outdoor Wall  
Mount  
Page 177



**4433**  
Residential Outdoor Wall  
Mount  
Page 177



**4406-30**  
Outdoor Wall Sconce  
Page 178



**4405**  
Outdoor Wall Lantern  
Page 179



**4407**  
Outdoor Wall Lantern  
Page 180



**4408**  
Outdoor Cone Wall Mount  
Page 181

## Warranty Information



Integrated LED Lights




Other Components




# 3" LED Architectural Cylinder Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms
- 17W | 1105 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

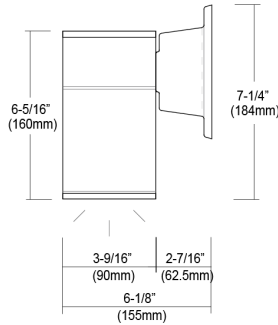

Oil Rubbed Bronze (OB)

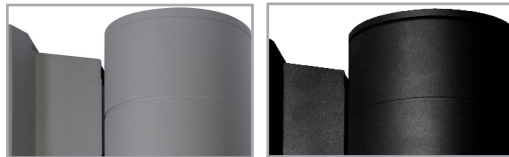


Brushed Aluminum (BA)    Black (BK)

ORDERING GUIDE		Example: 4423BK-17-3K	
Model	Finish	Watts	CCT
4423	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze		


# 3" LED Architectural Cylinder Up & Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms per side
- 17W | 1105 lms per side
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

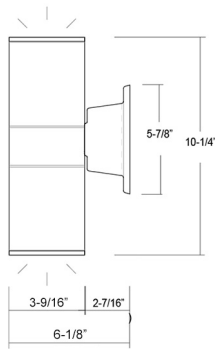

Oil Rubbed Bronze (OB)

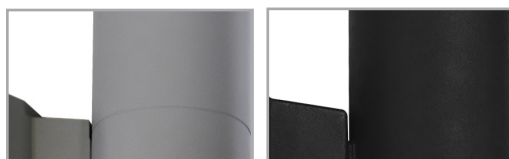

Brushed Aluminum (BA)    Black (BK)

ORDERING GUIDE		Example: 4424OB-13-4K	
Model	Finish	Watts	CCT
4424	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze		


Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.




# 4" LED Architectural Cylinder Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms
- 17W | 1105 lms
- 27W | 1755 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

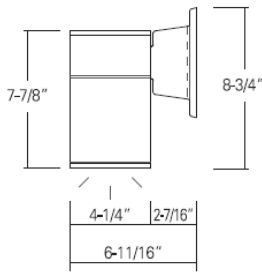

Oil Rubbed Bronze (OB)

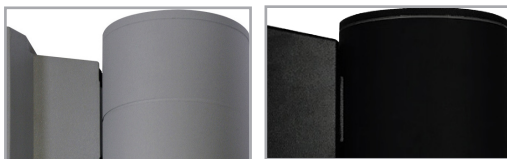



Brushed Aluminum (BA) Black (BK)

ORDERING GUIDE		Example: 4425BA-27-4K	
Model	Finish	Watts	CCT
4425	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze	-27 27W	

# 4" LED Architectural Cylinder Up & Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms per side
- 17W | 1105 lms per side
- 27W | 1755 lms per side
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

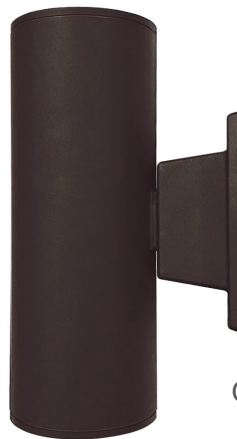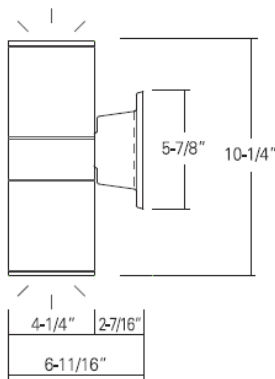

Oil Rubbed Bronze (OB)



Brushed Aluminum (BA) Black (BK)



ORDERING GUIDE		Example: 4426OB-13-4K	
Model	Finish	Watts	CCT
4426	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze	-27 27W	

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.

# 4" LED Architectural Square Cylinder Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms
- 17W | 1105 lms
- 27W | 1755 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

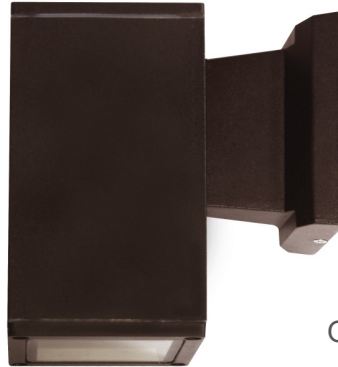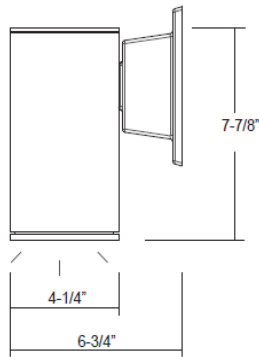

Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)    Black (BK)


## ORDERING GUIDE Example: 4427BK-17-3K

Model	Finish	Watts	CCT
4427	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze	-27 27W	

# 4" LED Architectural Square Cylinder Up & Downlight



- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with acrylic diffuser
- Operating Temp: -30°C to +40°C
- 13W | 845 lms per side
- 17W | 1105 lms per side
- 27W | 1755 lms per side
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

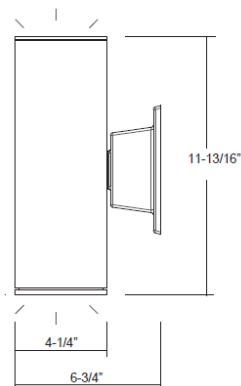

Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)    Black (BK)

## ORDERING GUIDE Example: 4428BK-17-3K

Model	Finish	Watts	CCT
4428	BK Black	-13 13W	-3K 3000K
	BA Brushed Aluminum	-17 17W	-4K 4000K
	OB Oil Rubbed Bronze	-27 27W	

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# 9" Outdoor LED Bulkhead




- 120V - 60Hz
- 3000K or 4000K | 80 CRI
- Dimmable TRIAC, 5% -100%
- Die Cast Aluminum with Gasketed, frosted acrylic diffuser
- Operating Temp: -30°C to +40°C
- 4420: 15W | 850 lms
- 4421: 15W | 700 lms
- 4422: 15W | 650 lms
- Energy Star Listed
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Black (BK)

4420

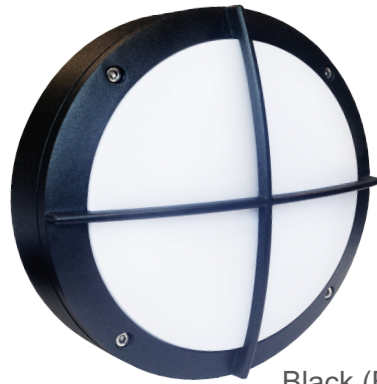

Black (BK)

4421



Black (BK)

4422

4420



Oil Rubbed Bronze (OB)

4421




Oil Rubbed Bronze (OB)

4422



Oil Rubbed Bronze (OB)

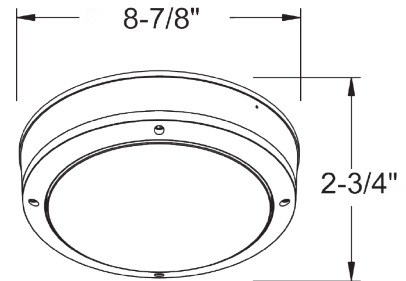

Brushed Aluminum (BA)



Brushed Aluminum (BA)



Brushed Aluminum (BA)

**ORDERING GUIDE**

Example: 4420BA

Model	Finish	
4420	BK	Black
4421	BA	Brushed Aluminum
4422	OB	Oil Rubbed Bronze

Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.


# Outdoor Wall Pack



- 120V - 60Hz
- 4000K or 5000K | 80 CRI
- Die Cast Aluminum housing with hinged door frame
- Gasketed Clear Stippled Glass Lens
- Operating Temp: -30°C to +40°C
- 0-10V Dimming
- 45W | 4050 lms
- 70W | 6300 lms
- cCSAus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)

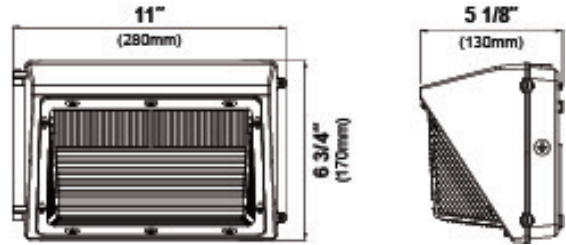

## ORDERING GUIDE

Example: 4429OB-45-4K

Model	Finish	Watts	CCT
4429	OB Oil Rubbed Bronze	-45 45W -70 70W	-4K 4000K -5K 5000K


# Adjustable Full-Cutoff Wall Pack



- 120-277V - 60 Hz
- 4000K or 5000K | 80 CRI
- Die Cast Aluminum with fresnel lens
- 0°C to 90°C Adjustable | Integrated Photocell
- Operating Temp: -40°C to 40°C
- 30W | 3600 lms | 150W HID Equivalent
- 60W | 7200 lms | 250W HID Equivalent
- 80W | 9600 lms | 350W HID Equivalent
- cETLus Listed for wet location
- IP65 Listed | DLC Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)

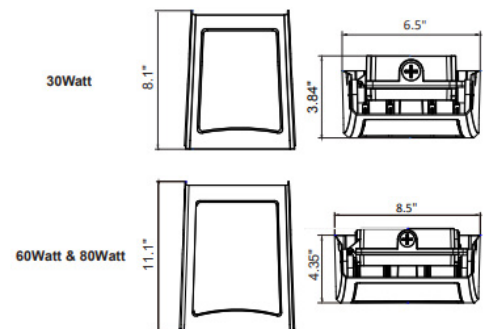

## ORDERING GUIDE

Example: 4432-1OB-30-4K

Model	Finish	Watts	CCT
4432-1	OB Oil Rubbed Bronze	-30 30W -60 60W -80 80W	-4K 4000K -5K 5000K

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# 11" Wet Location Ceiling Mount




- 120V - 60Hz
- 3000K | 80 CRI
- Polycarbonate housing and diffuser
- Operating Temp: -20°C to 40°C
- 17W | 800 lms
- 11" D x 3-1/2" H
- cETLus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Black (BK)



Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)

**ORDERING GUIDE**      Example: 4715BK

Model	Finish	
4715	<b>BK</b>	Black
	<b>BA</b>	Brushed Aluminum
	<b>OB</b>	Oil Rubbed Bronze

*Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.*



# Residential Outdoor Wall Mount



LED Lamp Other Components

- 120V - 60Hz
- 3000K | 80 CRI
- 0-10V Dimming
- Integrated Photocell
- Steel construction with acrylic lens
- Operating Temp: -20°C to 40°C
- 15W | 1050 lms  
8" x 12-1/4" x 5-1/8"
- cETLus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Black (BK)

## ORDERING GUIDE Example: 4401LED-BA

Model	Finish
4401LED	<b>BK</b> Black

# Residential Outdoor Wall Mount



LED Lamp Other Components

- 120V - 60Hz
- 4000K | 80 CRI
- Aluminum with acrylic lens
- Integrated Photocell
- 15W | 1050 lms  
10-1/2" x 6" x 4-1/2"
- 25W | 1500 lms  
13" x 7-1/2" x 5"
- cETLus Listed for wet location
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)

## ORDERING GUIDE Example: 4433OB-15-4K

Model	Finish	Watts	CCT
4433	<b>BK</b> Black	<b>-15</b> 15W	<b>-4K</b> 4000K
	<b>OB</b> Oil Rubbed Bronze	<b>-25</b> 25W	

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Outdoor Wall Sconce



LED Lamp  
Other Components

- 120V - 60Hz
- 3000K | 80 CRI
- Steel construction with acrylic lens
- Operating Temp: -20°C to 40°C
- Integrated Photocell
- 15W | 800 lms
- 7" W x 9-7/8" H x 3-3/8" D
- cETLus Listed for wet location
- Energy Star Listed
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Black (BK)



Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)

**ORDERING GUIDE**      Example: 4406-30-BA

Model	Finish
4406-30	-BA Brushed Aluminum
	-BK Black
	-OB Oil Rubbed Bronze



see 4404-30 for  
Indoor use  
pg 122

*Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.*

# Outdoor Wall Lantern



- 120V - 60Hz
- 3000K | 90 CRI
- Integrated Photocell
- Steel construction with clear bubble glass lens
- Operating Temp: -20°C to 40°C
- 1 x 9W E26 A19 LED Lamp Included
- 11-1/2" x 6" x 8"
- cELTus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- 1 Year Limited Warranty



OUTDOOR LIGHTING

## ORDERING GUIDE

Example: 4405BK-E26

Model	Finish	
4405	BK Black	-E26 9W A19 LED Lamp Included

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Outdoor Wall Lantern



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Aluminum construction with frosted glass lens
- Operating Temp: -20°C to 40°C
- 1 x 9W E26 A19 LED Lamp Included
- 4-5/8" x 6" x 8-1/2"
- cELTus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- 1 Year Limited Warranty



## ORDERING GUIDE

Example: 4407BK-E26

Model	Finish	
4407	BK Black	-E26 9W A19 LED Lamp Included

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Outdoor Cone Wall Mount



- 120V - 60Hz
- 3000K | 90 CRI
- Dimmable TRIAC, 10-100%
- Steel construction
- Operating Temp: -20°C to 40°C
- 1 x 9W E26 A19 LED Lamp Included
- 10-1/2" x 11-5/8" x 8-3/4"
- cELTus Listed for wet location
- Energy Star Listed
- CEC JA8 Compliant
- 1 Year Limited Warranty



OUTDOOR LIGHTING

## ORDERING GUIDE

Example: 4408BK-E26

Model	Finish	
4408	BK Black	-E26 9W A19 LED Lamp Included

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



# Step Lighting




# Louvered Outdoor LED Step Light




- 120V - 60Hz
- 3000K | 80 CRI
- LED 5W | 60 lms
- 4-3/4" H x 9-3/8" W x 3-1/2" D

- Louvered metal front cover with clear glass lens
- Horizontal Mount Only
- Mounts in 5-gang electrical box for direct pour concrete

- cETLus Listed for wet location
- IC Rated for non-cellulose insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty

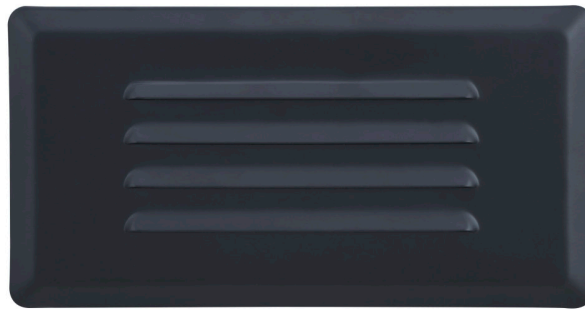

Black (BK)



White (WH)



Brushed Aluminum (BA)

## ORDERING GUIDE Example: 8924WH

Model	Finish	
8924	BA	Brushed Aluminum
	BK	Black
	WH	White

# Mini Louvered Outdoor LED Step Light



- 120V - 60Hz
- 3000K | 80 CRI
- LED 3W | 45 lms
- 4-1/2" H x 2-3/4" W x 3/4" D

- Louvered metal front cover with clear glass lens
- Horizontal and Vertical Mount
- Mounts in 5-gang electrical box for direct pour concrete

- cETLus Listed for wet location
- IC rated for non-cellulose insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Brushed Aluminum (BA)



White (WH)



Black (BK)

## ORDERING GUIDE Example: 8918WH

Model	Finish	
8918	BA	Brushed Aluminum
	BK	Black
	WH	White


# Mini Outdoor LED Step Light




- 120V - 60Hz
- 8919-1: 3000K | 80 CRI
- 8919-18K: 1800K | 80 CRI
- LED 5W | 215 lms
- 2-7/8" H x 4-3/4" W x 3/4" D
- Louvered metal front cover with acrylic lens
- Horizontal
- Mounts in a single gang electrical box
- cETLus Listed for wet location
- IC rated for non-cellulose insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)



Black (BK)



White (WH)

**ORDERING GUIDE** Example: 8919WH-1

Model	Finish	Version
8919	BK Black	-1
	OB Oil Rubbed Bronze	
	WH White	
Model	Finish	Version
8919	BK Black	-18K
	OB Oil Rubbed Bronze	
	WH White	

# Mini Lens Outdoor LED Step Light




- 120V - 60Hz
- 3000K | 80 CRI
- LED 4W | 120 lms
- 5" W x 3-1/8" H
- Aluminum front cover with glass lens
- Horizontal or Vertical Mount
- Mounts in a single gang electrical box
- cETLus Listed for wet location
- IC rated for non-cellulose insulation
- LED Lamp: 5 Year Limited Warranty
- Other Components: 1 Year Limited Warranty



Oil Rubbed Bronze (OB)



Brushed Aluminum (BA)



White (WH)



Black (BK)

**ORDERING GUIDE** Example: 8918WH

Model	Finish
8920	BA Brushed Aluminum
	BK Black
	OB Oil Rubbed Bronze
	WH White

*Specifications and dimensions subject to change. Lumens are delivered unless otherwise noted. See website for most current information.*







# Track Lighting





# Track Lighting Overview



**7553**  
Round Flat Back  
Page 188



**7554**  
Square Flat Back  
Page 188



**7577**  
Round Back  
Page 188



**7574**  
Flair Shallow Profile  
Page 188



**7575**  
Flair Shallow Profile  
Page 188



**7576**  
Flair Shallow Profile  
Page 188



**7578**  
Tech Form  
Page 189



**7579, 7580**  
Tech Form  
Page 189



**7526**  
Gimbal Ring  
Page 189



**7551**  
Mesh Roundback Head  
Page 189



**7528**  
Gimbal Ring  
Page 189



**7586**  
Tech Form  
Page 190



**7587, 7588**  
Tech Form  
Page 190



**7584**  
Round Back  
Page 190



**7589**  
Flaired Shallow Profile  
Page 190



**7953, 7953-4**  
Track Pack, LED Track Heads  
Page 191



**7594**  
Suspended Decorative Glass  
Page 191



**49354-3K**  
3 Head Light Bar  
Page 192



**49353-3K**  
4 Head Light Bar  
Page 192



**49355, 4956**  
5 and 6 Head Light Bars  
Page 193

## Warranty Information



Integrated LED Lights



Other Components

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.


# Track Heads



Intertek

The small-size heads provide a compact lighting solution for residential, retail, and commercial applications. With a variety of standard finishes, simple dimmable LED lamps, and J-track compatibility these fixtures offer solid flexibility for many needs.

- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- 38° Beam Spread
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- Polycarbonate Lens
- LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

## 7553WH, BK, BA

Round Flat Back  
8W | 650 lms



A	B	C
4-1/2"	2-3/4"	2-1/4"

## 7574WH, BK, BA

Flair Shallow Profile  
10W | 730 lms



A	B	C
4-1/4"	4-1/4"	3-1/4"

## 7554WH, BK, BA

Square Flat Back  
8W | 650 lms



A	B	C
4-1/2"	2-3/4"	2-1/4"

## 7575WH, BK, BA

Flair Shallow Profile  
10W | 730 lms



A	B	C
4-1/4"	4-1/4"	3-1/4"

## 7577WH, BK, BA

Round Back  
10W | 645 lms



A	B	C
4-1/4"	3-3/4"	2-1/2"

## 7576WH, BK, BA

Flair Shallow Profile  
15W | 900 lms



A	B	C
4"	6-7/8"	5-3/8"


Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

## Track Heads



The small-size heads provide a compact lighting solution for residential, retail, and commercial applications. With a variety of standard finishes, simple dimmable LED lamps, and J-track compatibility these fixtures offer solid flexibility for many needs.

- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

### 7578WH, BK, BA

Tech Form  
12W | 800 lms

A	B	C
6-1/4"	4-1/2"	2-5/8"



### 7580WH, BK, BA

Tech Form  
20W | 1300 lms

A	B	C
7-1/2"	5-1/4"	4"



### 7579WH, BK, BA

Tech Form  
12W | 800 lms

A	B	C
7-1/2"	5-1/4"	4"




## Track Heads



The small-size heads provide a compact lighting solution for residential, retail, and commercial applications.

- 120V Operating Voltage
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- Lamps Not Included
- UL Listed for dry location
- 1 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

### 7526WH, BK, BA

Gimbal Ring  
75W PAR30

A	B	C
7-1/4"	4-7/8"	3-15/16"



### 7528WH, BK, BA

Gimbal Ring  
50W PAR20

A	B	C
6-1/2"	4-1/4"	2-5/8"



### 7551GWH, GBA

Mesh Roundback Head  
50W GU10 lamp

A	B	C
4-1/2"	2-3/4"	2-3/16"




Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

# Track Heads



The small-size heads provide a compact lighting solution for residential, retail, and commercial applications. With a variety of standard finishes, simple dimmable LED lamps, and J-track compatibility these fixtures offer solid flexibility for many needs.

- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- Factory Conversion to H-track Compatible Available
- Polycarbonate Lens
- LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

## 7586WH, BK, BA

Tech Form  
8W | 700 lms | 36° Beam Spread

A	B	C
4-4/5"	2-9/10"	2-4/5"



## 7584WH, BK, BA

Round Back  
10W | 800 lms | 40° Beam Spread

A	B	C
3-5/8"	2-7/10"	2-1/2"



## 7587WH, BK, BA

Tech Form  
20W | 1600 lms | 36° Beam Spread

A	B	C
4-2/5"	4-2/5"	2-4/5"



## 7589WH, BK, BA

Flaired Shallow Profile  
15W | 1200 lms | 40° Beam Spread

A	B	C
4.25"	4-3/5"	3-7/10"



## 7588WH, BK, BA

Tech Form  
28W | 2016 lms | 36° Beam Spread

A	B	C
6"	5-2/5"	5"




Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

## Track Pack with LED Track Heads



- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- Acrylic Lens
- Each head: 8W | 650 lms
- LED lamps included
- cETLus Listed for dry location
- 5 Year Limited Warranty



Finishes Available: White (WH), Black (BK), Brushed Aluminum (BA)

### 7953WH, BK, BA

- Included In a Single Box:
- 1 - 4' track (7604)
- 1 - Floating Feed (7629)
- 3 - Round Flat Back Heads (7553)



A	B	C
4-1/2"	2-3/4"	2-1/4"

### 7953-4WH, BK, BA

- Included In a Single Box:
- 1 - 4' track (7604)
- 1 - Floating Feed (7629)
- 4 - Round Flat Back Heads (7553)



A	B	C
4-1/2"	2-3/4"	2-1/4"

## LED Suspended Decorative Glass



- 120V Operating Voltage
- 3000K | 90 CRI
- Dimmable TRIAC, 15-100%
- J-track Compatible
- 6' Adjustable Hanging Cord
- Use RPL+F Track (sold separately)
- 7W | 450 lms | LED Lamp Included
- cETLus Listed for dry location
- 5 Year Limited Warranty


Finishes Available: White glass with Brushed Aluminum Cord (WBA), Amber Glass with Brushed Aluminum Cord (ABA)



7594ABA



7594WBA

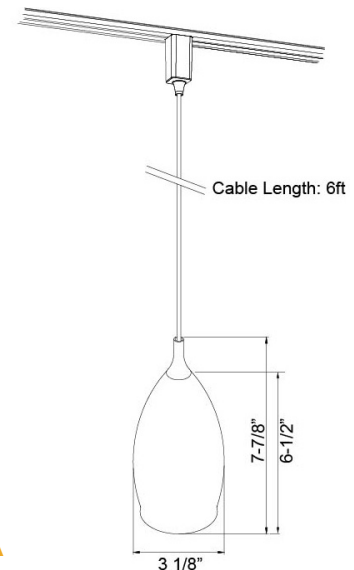

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.



## 3 or 4 Head Light Bar



Contemporary, clean and cool, this eye-catching LED light bar incorporates a subtle wave, providing an instant touch of classic, yet modern design. An ideal choice for enhancing the look and feel of almost any interior space, great for residential kitchens, bars, and hospitality applications.

- 120V Operating Voltage
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- 330° Horizontal Head Rotation
- 90° Vertical Head Rotation
- 74° Beam Spread
- LED Lamps Included
- Energy Star Listed
- cETLus Listed for damp location
- 5 Year Limited Warranty



### 49354-3K-BN

Available in Brushed Nickel (BN)  
3-Track Heads | 15W | 950 total lms



### 49353-3K-BN

Available in Brushed Nickel (BN)  
4-Track Heads | 20W | 1481 total lms

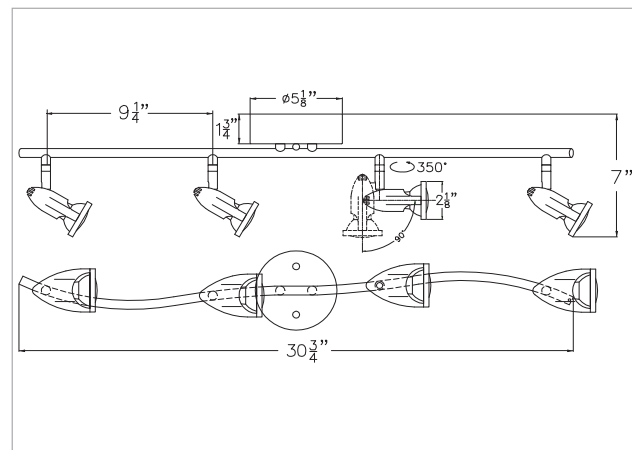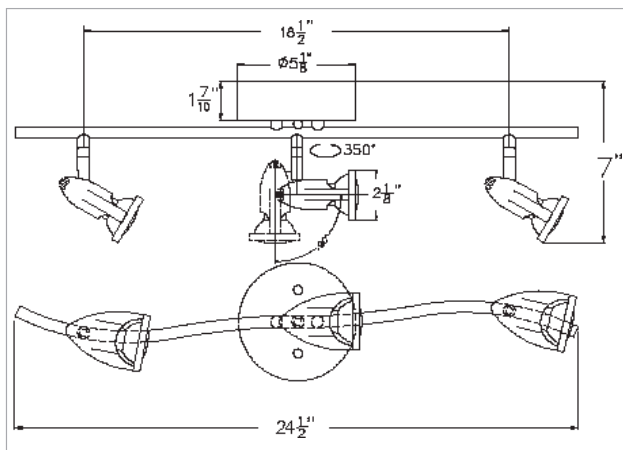

## 5 or 6 Head Light Bar



Contemporary, clean and cool, this eye-catching LED light bar incorporates a subtle wave, providing an instant touch of classic, yet modern design. An ideal choice for enhancing the look and feel of almost any interior space, great for residential kitchens, bars, and hospitality applications.

- 120V Operating Voltage
- 3000K | 80 CRI
- Dimmable TRIAC, 10-100%
- 330° Horizontal Head Rotation
- 90° Vertical Head Rotation
- 74° Beam Spread
- LED Lamps Included
- cETLus Listed for damp location
- 5 Year Limited Warranty



### 49355BN

Available in Brushed Nickel (BN)  
5-Track Heads | 22W |  
1400 total lms



### 49356BN

Available in Brushed Nickel (BN)  
6-Track Heads | 28W |  
1750 total lms

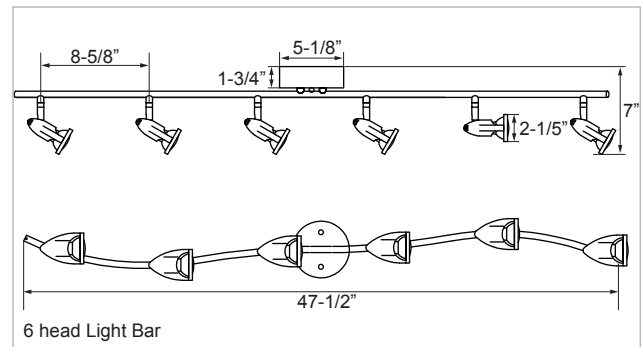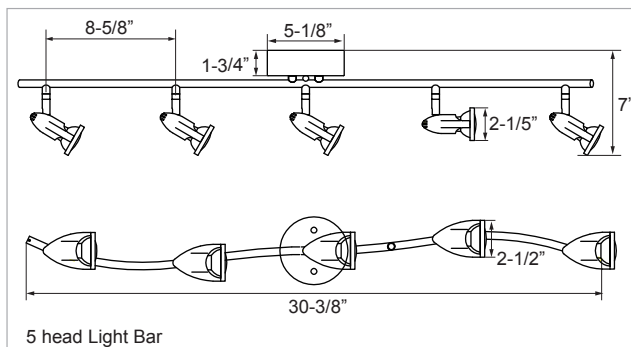

Specifications and dimensions subject to change.  
Lumens are delivered unless otherwise noted.  
See website for most current information.

## Track Section




RP Lighting's J-track is designed to be affordable yet flexible to provide dramatic lighting where you need it.



Available in: White (WH), Black (BK), Brushed Aluminum (BA)

- 7602WH, BK, BA** 2' Track
- 7604WH, BK, BA** 4' Track
- 7606WH, BK, BA** 6' Track
- 7608WH, BK, BA** 8' Track




## Connector

Single Circuit

- A. The best possible electrical conductivity due to Beryllium copper contacts
- B. True, positive electrical ground wire
- C. Spring-loaded positive latch secures track fixtures to track
- D. Embossed polarity arrows on side of adapter



To ensure correct installation, each section has a polarity line indicating the positive conductor side. Both lights and track connectors, when installed properly, have arrows which point to the track polarity line.



## Track Lighting Accessories

### 7620WH, BK

Wireway Cover  
Color: white (WH), black (BK)



### 7621WH, BK

Live End-Feed with Canopy  
Color: white (WH), black (BK)




### 7622WH

Live-End Feed with 10' cord included  
Color: white (WH)



### 7623WH, BK, BA

Mini-Straight Connector  
Color: white (WH), black (BK), brushed aluminum (BA)



### 7624WH, BK, BA

L-Connector/  
Straight Connector  
Color: white (WH), black (BK), brushed aluminum (BA)



### 7625WH, BK

T-Connector  
Color: white (WH), black (BK)



### 7629WH, BK, BA


Floating Feed  
Color: white (WH), black (BK), brushed aluminum (BA)



# Track Lighting Accessories

## 7626WH, BK

X-Connector  
Color: white (WH), black (BK)



## 7647WH, BK, BA

H-track Connector  
Color: white (WH), black (BK), brushed aluminum (BA)



## 7634WH, BK, BA

Conduit Connector  
Color: white (WH), black (BK), brushed aluminum (BA)



## 7652WH, BK

Suspension Hook  
Color: white (WH), black (BK)



## 7638WH, BK, BA

Live End Feed  
Color: white (WH), black (BK), brushed aluminum (BA)




## 7653

T-Bar Clip



## 7640WH, BK, BA

Mono-Point Adapter  
Color: white (WH), black (BK), brushed aluminum (BA)



## 7681WH, BK, BA

End Cap  
Color: white (WH), black (BK), brushed aluminum (BA)



## 7642WH, BK

Flexible Connector  
Color: white (WH), black (BK)



## 7694WH, BK

Slope Ceiling Adapter  
Color: white (WH), black (BK)



## 7644WH, BK

Pendant Adapter  
Color: white (WH), black (BK)  
20LB Weight Limit



## Track Extension Wand

Includes: Connector to Track, Extension Wand, Adapter for Track Head  
Color: white (WH), black (BK)



## 7646WH, BK

T-Bar Connector  
Color: white (WH), black (BK)



## 7684-12WH, BK

12" Extension Wand

## 7684-18WH, BK

18" Extension Wand

## 7684-24WH, BK

24" Extension Wand

## 7695WH

Suspension Cable  
Includes 48" cable connection to back of track.  
Color: white (WH)



## Suspension Kit

Includes: canopy, stem length, connection to back of track

## 7654-12WH, BK

12" Suspension Stem Kit

## 7654-36WH, BK

36" Suspension Stem Kit

## 7654-18WH, BK

18" Suspension Stem Kit

## 7654-48WH, BK

48" Suspension Stem Kit

## 7654-24WH, BK

24" Suspension Stem Kit



Color: white (WH), black (BK)

# Index

1004-E26-L.....	14	1071LED.....	24	4218.....	147
1005-E26-L.....	18	1072-PC.....	31	4309-1.....	148
1005LED.....	18	1072LED-PC.....	31	4310-1.....	148
1007-E26-L.....	15	1073-PC.....	30	4311-1.....	148
1007LED.....	15	1073LED-PC.....	30	4312-1.....	148
1008LED.....	14	1074.....	22	4313-1.....	112
1015W.....	35	1074LED.....	22	4314-1.....	112
1016W.....	36	1078-E26-L.....	11	4318-1.....	112
1021-PC.....	28	1078LED.....	11	4319.....	107
1022-PC.....	28	1079-E26-L.....	10	4320.....	120
1023-PC.....	29	1079LED.....	10	4322.....	120
1024-PC.....	29	1080W.....	37	4325D-1.....	109
1025-E26-L.....	19	1088.....	38	4326D-1.....	109
1025LED.....	19	1088LED.....	38	4327D-1.....	109
1032.....	41	1091.....	39	4328-1.....	111
1041-E26-L.....	16	1RP18-ES.....	46	4329-1.....	111
1041LED.....	16	1RP18-SG-ES.....	46	4330-1.....	111
1042-E26-L.....	20	1RP22-ES.....	47	4333.....	115
1042LED.....	20	1RP28-E26-L.....	48	4334.....	115
1043LED.....	13	1RP31-LE.....	48	4335.....	115
1044LED.....	17	1RP32-LED.....	48	4336.....	120
1045LED.....	21	1RP69LED.....	48	4337.....	120
1046.....	23	1RP8-ES.....	46	4338.....	120
1046LED.....	23	1RP82-ES.....	47	4340.....	113
1047.....	25	1RP83-LED.....	48	4345.....	112
1047LED.....	25	1RP84-LED.....	48	4347.....	114
1048.....	27	1RP88LED.....	48	4348.....	115
1048LED.....	27	1RP89LED.....	48	4350.....	109
1049-E26-L.....	12	2004CG.....	49	4401LED.....	177
1049LED.....	12	2004FG.....	49	4404.....	122
1051.....	45	2015CG.....	49	4405.....	179
1052.....	42	2015FG.....	49	4406.....	178
1053.....	43	2021G.....	49	4407.....	180
1054.....	43	2061G.....	49	4408.....	181
1057-L.....	40	3001G.....	49	4420.....	174
1062-1.....	44	4105.....	146	4421.....	174
1063-1.....	44	4106.....	146	4422.....	174
1064-1.....	44	4115.....	144	4423.....	171
1065.....	26	4115DM.....	144	4424.....	171
1065LED.....	26	4116.....	145	4425.....	172
1067.....	32	4116DM.....	145	4426.....	172
1068.....	33	4117-1.....	149	4427.....	173
1069.....	34	4120.....	149	4428.....	173
1070W.....	37	4204.....	147	4429.....	175
1071.....	24	4217.....	147	4430.....	139



# Index

4432-1.....	175	7594.....	191	8122H.....	70
4433.....	177	7602.....	194	8122HIC.....	70
4503.....	121	7604.....	194	8124H.....	70
4505.....	121	7606.....	194	8125H.....	74
4506.....	107, 130	7608.....	194	8125HIC.....	74
4600.....	137	7620.....	194	8126H.....	74
4601.....	135	7621.....	194	8162H.....	72
4602.....	135	7622.....	194	8163H.....	73
4603.....	134	7623.....	194	8164H.....	76
4604.....	136	7624.....	194	8164HIC.....	76
4605.....	139	7625.....	194	8166H.....	76
4606.....	138	7626.....	195	8166HIC.....	76
4715.....	114, 176	7629.....	194	8168H.....	76
4782EM.....	166	7634.....	195	8168HIC.....	76
4783EM.....	166	7638.....	195	8199HICA-FR.....	68
4785EM.....	167	7640.....	195	8201HA.....	84
4785F.....	167	7642.....	195	8201HRA.....	84
4904.....	127	7644.....	195	8202HA.....	84
4905.....	107, 131	7646.....	195	8215HA.....	80
4906.....	128	7647.....	195	8215HRA.....	80
4907.....	129	7652.....	195	8216FR-JB.....	66
4908.....	127	7653.....	195	8317H.....	78
4909.....	126	7654.....	195	8317HR.....	78
49353.....	192	7681.....	195	8320H.....	62
49354.....	192	7684.....	195	8321H.....	62
49355.....	193	7694.....	195	8502.....	90
49356.....	193	7953.....	191	8504.....	90
4-JBR.....	91	7953-4.....	191	8505.....	90
7526.....	189	8041.....	76	8511.....	90
7528.....	189	8061.....	76	8519.....	90
7551.....	189	8081.....	76	8523.....	69, 83, 89
7553.....	188	8091A.....	103	8536.....	97, 108
7554.....	188	8096A.....	103	8538.....	89, 101, 118
7574.....	188	8096B.....	64, 70, 72, 73, 74, 103	8539.....	97, 108
7575.....	188	8097A.....	103	8542-2.....	92
7576.....	188	8098A.....	103	8544.....	90
7577.....	188	8102HAQ.....	88	8545.....	95
7578.....	189	8102HRA.....	88	8548.....	98, 110
7579.....	189	8104HICA.....	88	8554.....	102, 119
7580.....	189	8116HIC.....	87	8556.....	90, 99, 116
7584.....	190	8117HA.....	82	8556-S.....	100, 117
7586.....	190	8117HRA.....	82	8557.....	100, 117
7587.....	190	8120H.....	64	8562.....	69, 83, 89
7588.....	190	8120HIC.....	64	8563.....	69, 83, 89
7589.....	190	8121H.....	64	8564.....	89

# Index

8567.....	89	8861.....	63	REL20.....	161
8568.....	69, 83, 89	8862.....	63	REL21.....	161
8569.....	90, 101, 118	8918.....	183	REL22.....	162
8570.....	87	8919-1.....	184	REL23-N-SD.....	162
8571.....	87	8919-18K.....	184	REL23-SD.....	162
8572.....	87	8920.....	184	REL-200.....	161, 162
8573.....	87	8924.....	183	REL35.....	160
8586.....	65	8966.....	142	REL5LED.....	164
8587.....	65	8966-2734.....	143	REL6LED.....	163
8590.....	65	8967.....	142	REL7LED.....	164
8642.....	93	8967-2734.....	143	RH17.....	165
8651.....	71	8968.....	142	RH18.....	165
8652.....	71	8968-2734.....	143	RH21.....	165
8653.....	71	8969.....	142	RH22.....	165
8655.....	71	8969-2734.....	143	RXEL25.....	157
8656.....	72	8970.....	142	RXEL35.....	157
8671.....	75	8970-2734.....	143	RXEL36.....	157
8673.....	75	8971.....	142	RXEL37.....	158
8676.....	73	8971-2734.....	143	RXEL38.....	158
8701.....	86	8972.....	142	RXEL39.....	159
8702.....	86	8972-2734.....	143	RXEL40.....	159
8705.....	86	DC.....	52	RXL15-1.....	156
8708.....	91	E12.....	52	RXL16-1.....	156
8711.....	91	E18.....	52	RXL17.....	154
8722.....	85	E24.....	52	RXL18.....	154
8739.....	97, 108	E36.....	52	RXL28.....	153
8742-2.....	92	E48.....	52	RXL33.....	155
8748.....	98, 110	E60.....	52	RXL34.....	155
8756.....	85, 99, 116	E72.....	52	RXL5.....	153
8761.....	85	ER36.....	52	SA45.....	53
8763.....	67, 81, 85	ER48.....	52	T-09.....	52
8765.....	85	ER60.....	52	WC-3.....	51
8768.....	85	FF109-300.....	103	WC-4.....	51
8769.....	67, 81, 86	FF-109-350.....	103	WC-8.....	51
8770.....	67, 81, 86	FF109X.....	103	WC-13.....	51
8771.....	67, 81, 86	LC-102.....	50	WC-16.....	51
8773.....	67, 81, 86	LC-79.....	50		
8775.....	94	LK10.....	49		
8776.....	96	LK12.....	49		
8821-1.....	79	LK30.....	49		
8822-1.....	79	LK412.....	49		
8823.....	79	PF-3.....	93, 103		
8824.....	79	PF-4.....	92, 94, 96, 103		
8825.....	79	PF-6.....	92, 95, 103		
8842.....	93	RC-10.....	51		



## **RP LIGHTING • FANS**

4931 Paseo Del Norte NE  
Albuquerque, NM 87113

[www.rplighting.com](http://www.rplighting.com)

Phone: (505) 821-6964

Toll Free: (800) 937-6925

Fax: (505) 821-0367

Toll Free: (800) 207-9509

Email: [rplighting@rplighting.com](mailto:rplighting@rplighting.com)

© 2021 RP Lighting • Fans



**RP**

**LIGHTING • FANS**

